
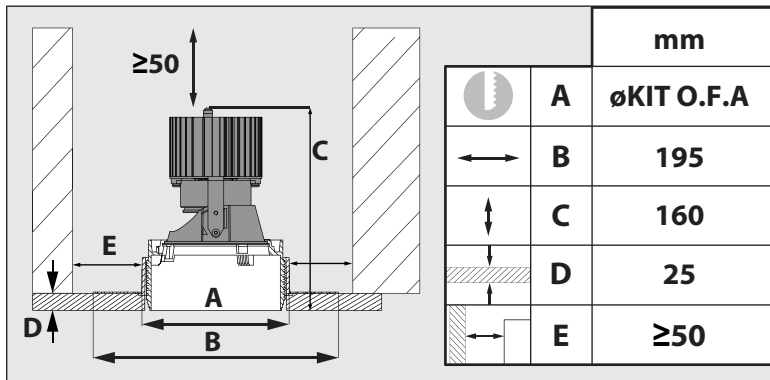
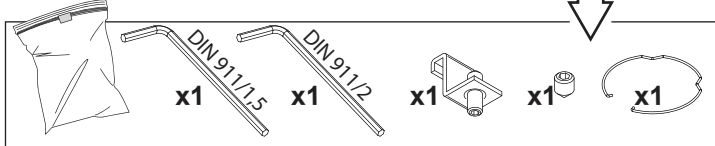
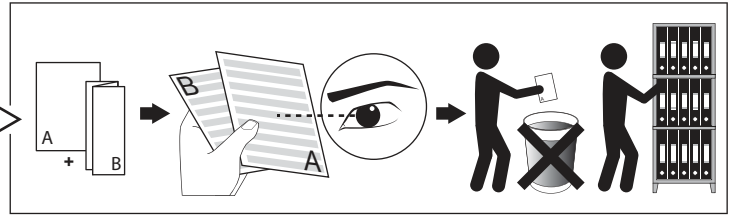
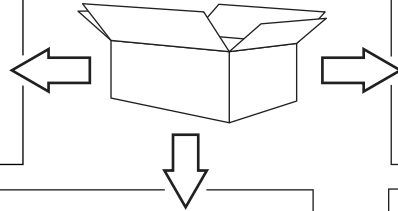


iMAX ADJUSTABLE TRIMLESS SOFT-9

DEEL
PARTIE
TEIL
PART
PARTE
PARTE

A

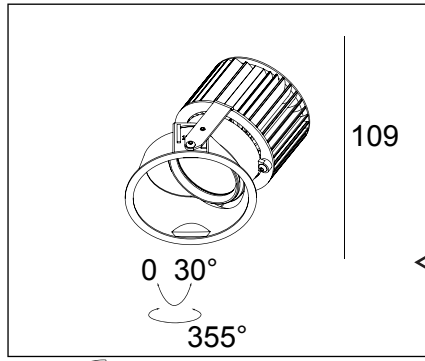



INSTALLATION REQUIREMENTS

MOUNTING KIT R102 TRIMLESS O.F.A.
400 91 02 OFA

iMAX COVER
400 00 30

I _o	650mA
P _o	10W
U _f Typical	12-16V-DC

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V AC)
Convient uniquement pour les produits à très basse tension (moins de 50 V AC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V AC)
Only suited for goods at very low voltage (below 50 V AC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V AC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V AC)

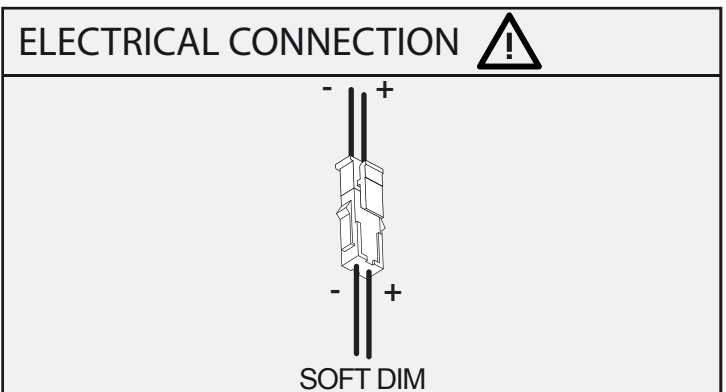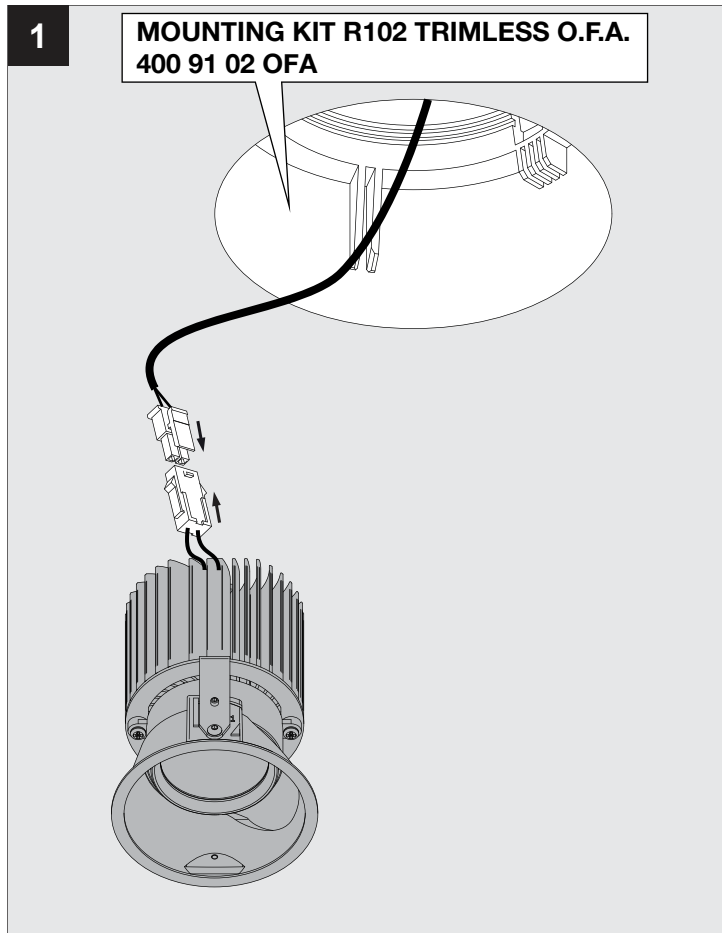

ONLY WITH POWER SUPPLIES

300 90 915 ED8

Falling Edge dimming 220-240V / 50-60Hz
650mA / 10W / 12-16Vdc

300 90 915 ED5

Digital dimming 220-240V / 50-60Hz
650mA / 10W / 12-16Vdc

