


Atlas Mix 150

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	Yes (30°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Incl. protective glass	
Warranty:	see p.308

Bridgelux Vero 18 LED


Luminous flux LED	700mA	1050mA
2700K - Ra90:	2585lm (135lm/W)	3754lm (126lm/W)
3000K - Ra90:	2604lm (136lm/W)	3782lm (127lm/W)
4000K - Ra90:	2755lm (143lm/W)	4001lm (135lm/W)
Luminous flux System	700mA	1050mA
2700K - Ra90:	2096lm (93lm/W)	3044lm (89lm/W)
3000K - Ra90:	2112lm (93lm/W)	3067lm (90lm/W)
4000K - Ra90:	2234lm (99lm/W)	3244lm (95lm/W)
SDCM	3	
Beam angle	22° / 45° / 58°	
LED Power	19.7W / 700mA or 29.7W / 1050mA (excl. driver)	
System Power	22.6W / 700mA or 34.1W / 1050mA (incl. driver)	
Forward voltage	700mA: 26.1V (min.) - 28.3V (typ.) - 30.5V (max.) 1050mA: 26.8V (min.) - 29V (typ.) - 31.2V (max.)	



Trapezium springs

Bended steel sides for easy insertion & removal in ceiling

Height: 125mm
Build-in depth: 145mm

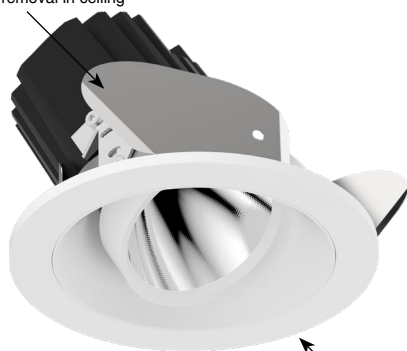

Outside measurements:
Ø150mm

Weight: 900g
(excl. driver)



Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Options

Honeycomb Grid 1048.00.09
Provides more visual comfort




On Request

Bridgelux Vero10 CRI Ra97

Air circulation notice:

Do not topload with insulation materials





Atlas Mix 150

2000lm - 700mA

PRICES INCL. DRIVERS

Non dim (Driver 492.24.32 incl.)

2700K - Ra90 - 22.6W - 2096lm	1037.AA.24.927.XX
3000K - Ra90 - 22.6W - 2112lm	1037.AA.24.930.XX
4000K - Ra90 - 22.6W - 2234lm	1037.AA.24.940.XX

Touch dim & DALI dim (Driver 490.26.36 incl.)

2700K - Ra90 - 22.6W - 2096lm	1037.AA.26.927.XX
3000K - Ra90 - 22.6W - 2112lm	1037.AA.26.930.XX
4000K - Ra90 - 22.6W - 2234lm	1037.AA.26.940.XX



Atlas Mix 150

3000lm - 1050mA

PRICES INCL. DRIVERS

Non dim (Driver 492.24.42 incl.)

2700K - Ra90 - 34.1W - 3044lm	1059.AA.24.927.XX
3000K - Ra90 - 34.1W - 3067lm	1059.AA.24.930.XX
4000K - Ra90 - 34.1W - 3244lm	1059.AA.24.940.XX

Touch dim & DALI dim (Driver 492.26.36 incl.)

2700K - Ra90 - 34.1W - 3044lm	1059.AA.26.927.XX
3000K - Ra90 - 34.1W - 3067lm	1059.AA.26.930.XX
4000K - Ra90 - 34.1W - 3244lm	1059.AA.26.940.XX

22° Reflector: 0000.22.00.000.00
 45° Reflector: 0000.45.00.000.00
 58° Reflector: 0000.58.00.000.00

Available colors: 0000.00.00.000.XX
 Other RAL colors on request



01
White Matt Text.
Standard




18
Grey Matt Text.
Standard



07
Anthracite Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text.
Standard



11
Black + Gold Matt
Standard



16
Gold Matt
Standard