


Atlas Mix Square

Type Downlight
Mounting Recessed
Material Aluminium
Adjustable Yes (30°/359°)
El. class / IP Class III / IP20
El. class driver Class II
Incl. protective glass
Warranty: see p.308


Bridgelux Vero 18 LED

Luminous flux LED	700mA	1050mA
2700K - Ra90:	2585lm (135lm/W)	3754lm (126lm/W)
3000K - Ra90:	2604lm (136lm/W)	3782lm (127lm/W)
4000K - Ra90:	2755lm (143lm/W)	4001lm (135lm/W)
Luminous flux System	700mA	1050mA
2700K - Ra90:	2096lm (93lm/W)	3044lm (89lm/W)
3000K - Ra90:	2112lm (93lm/W)	3067lm (90lm/W)
4000K - Ra90:	2234lm (99lm/W)	3244lm (95lm/W)
SDCM	3	
Beam angle	22° / 45° / 58°	
LED Power	19.7W / 700mA or 29.7W / 1050mA (excl. driver)	
System Power	22.6W / 700mA or 34.1W / 1050mA (incl. driver)	
Forward voltage	700mA: 26.1V (min.) - 28.3V (typ.) - 30.5V (max.) 1050mA: 26.8V (min.) - 29V (typ.) - 31.2V (max.)	



Trapezium springs

Bended steel sides for easy insertion & removal in ceiling

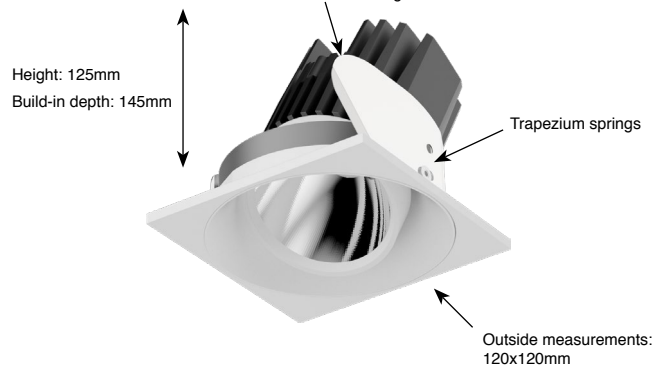

Weight: 800g
(excl. driver)




Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website
Driver information: see p.294-295

Options

Honeycomb Grid 1048.00.09
Provides more visual comfort




On Request

Bridgelux Vero10 CRI Ra97

Air circulation notice:

Do not topload with insulation materials





Atlas Mix Square

2000lm - 700mA

PRICES INCL. DRIVERS

Non dim (Driver 492.24.32 incl.)

2700K - Ra90 - 22.6W - 2096lm	1036.AA.24.927.XX
3000K - Ra90 - 22.6W - 2112lm	1036.AA.24.930.XX
4000K - Ra90 - 22.6W - 2234lm	1036.AA.24.940.XX

Touch dim & DALI dim (Driver 490.26.36 incl.)

2700K - Ra90 - 22.6W - 2096lm	1036.AA.26.927.XX
3000K - Ra90 - 22.6W - 2112lm	1036.AA.26.930.XX
4000K - Ra90 - 22.6W - 2234lm	1036.AA.26.940.XX



Atlas Mix Square

3000lm - 1050mA

PRICES INCL. DRIVERS

Non dim (Driver 492.24.42 incl.)

2700K - Ra90 - 34.1W - 3044lm	1063.AA.24.927.XX
3000K - Ra90 - 34.1W - 3067lm	1063.AA.24.930.XX
4000K - Ra90 - 34.1W - 3244lm	1063.AA.24.940.XX

Touch dim & DALI dim (Driver 492.26.36 incl.)

2700K - Ra90 - 34.1W - 3044lm	1063.AA.26.927.XX
3000K - Ra90 - 34.1W - 3067lm	1063.AA.26.930.XX
4000K - Ra90 - 34.1W - 3244lm	1063.AA.26.940.XX

22° Reflector: 0000.22.00.000.00
45° Reflector: 0000.45.00.000.00
58° Reflector: 0000.58.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01




White Matt Text.
Standard

18




Grey Matt Text.
Standard

07




Anthracite Matt Text. Standard

03




Black Matt Text.
Standard

25



Smoked Brown Text. Standard

11



Black + Gold Matt

16



Gold Matt