


Atlas Semi-Recessed

Type	Downlight
Mounting	Semi-Recessed
Material	Aluminium
Adjustable	Yes (90°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Incl. protective glass	
Warranty:	see p.308

Bridgelux Vero 18 LED

Luminous Flux LED	2700K - Ra90: 2585lm (125lm/W)
	3000K - Ra90: 2604lm (130lm/W)
	4000K - Ra90: 2755lm (139lm/W)
Luminous Flux System	2700K - Ra90: 2096lm (93lm/W)
	3000K - Ra90: 2112lm (93lm/W)
	4000K - Ra90: 2234lm (99lm/W)
SDCM	3
Beam angle	22° / 45° / 58°
LED Power	19.8W / 700mA (excl. driver)
System Power	22.6W / 700mA (incl. driver)
Forward voltage	26.1V (min.) - 28.3V (typ.) - 30.5V (max.)

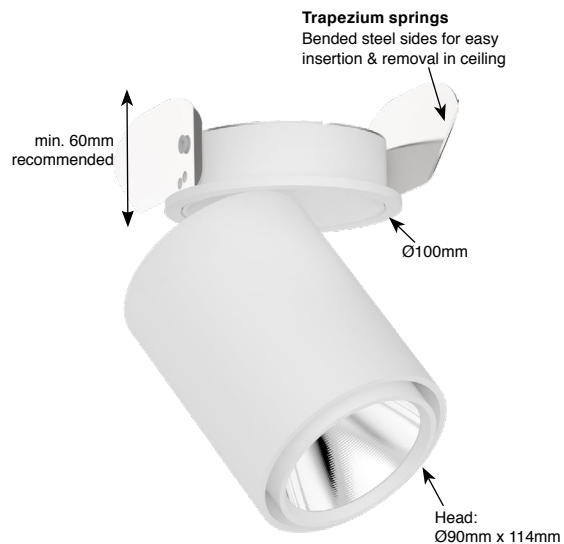

Recessed mounting in horizontal ceilings only!

Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website

Driver information: see p.294-295

Options

Honeycomb Grid 1048.00.09
Provides more visual comfort




On Request

Bridgelux Vero10 CRI Ra97

Air circulation notice:

Do not topload with insulation materials

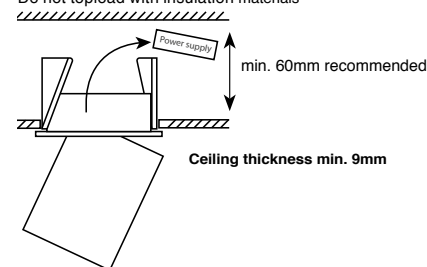



Atlas Semi-Recessed

2000lm - 700mA

PRICES INCL. DRIVERS

Non dim (Driver 492.24.32 incl.)

2700K - Ra90 - 22.6W - 2096lm 1042.AA.24.927.XX

3000K - Ra90 - 22.6W - 2112lm 1042.AA.24.930.XX

4000K - Ra90 - 22.6W - 2234lm 1042.AA.24.940.XX

Touch & DALI dim (Driver 490.26.36 incl.)

2700K - Ra90 - 22.6W - 2096lm 1042.AA.26.927.XX

3000K - Ra90 - 22.6W - 2112lm 1042.AA.26.930.XX

4000K - Ra90 - 22.6W - 2234lm 1042.AA.26.940.XX

22° Reflector: 0000.22.00.000.00

45° Reflector: 0000.45.00.000.00

58° Reflector: 0000.58.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request



White Matt Text.
Standard



Grey Matt Text.
Standard



Anthracite Matt Text.
Standard



Black Matt Text.
Standard



Smoked Brown Text.
Standard

