


FlatLED T1&T2

Trimless

Type Downlight
Mounting Trimless
Material Aluminium
Adjustable Yes (55°/359°)
El. class / IP Class III / IP20
El. class driver Class II
Warranty: see p.308

Citizen CLU LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90
SDCM 3
Luminous flux LED
2700K - Ra90: 1517lm (134lm/W)
3000K - Ra90: 1577lm (139lm/W)
4000K - Ra90: 1601lm (142lm/W)
Luminous Flux System
2700K - Ra90: 1335lm (103lm/W)
3000K - Ra90: 1388lm (107lm/W)
4000K - Ra90: 1409lm (108lm/W)
Beam angle FlatLED T1:37° - FlatLEDT2: 28° / 40°
LED Power 11.3W / 350mA (excl. driver)
System Power 12.9W / 350mA (incl. driver)
Current 350mA
Forward voltage 29.3V (min.) - 32.3V (typ.) - 35.1V (max.)




Spot dimensions: Ø120mm x height 60mm
Build-in depth: min. 80mm

Trimless gypkit included

Air circulation notice:

Do not toload with insulation materials

Adjustable ceiling
thickness 9-22mm

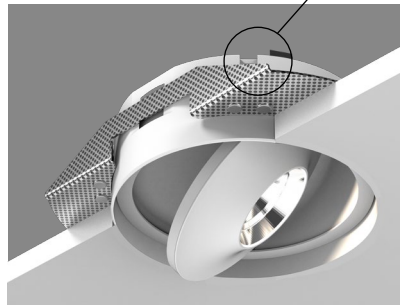

Weight: 700g
(excl. driver)



Driver:

- Included in article number and included in price
- External/Remote installation


Data sheets and wiring guide: see website
Driver information: see p.294-295


Design awards / Nominations

1. Nominated - Batibouw Brussels (2013)
2. Awarded - Design Plus (2014)

DESIGN PLUS

powered by: **light+building**

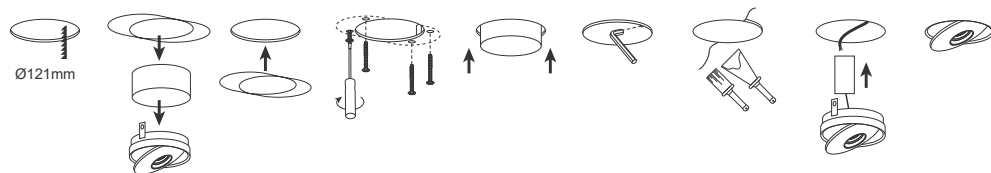

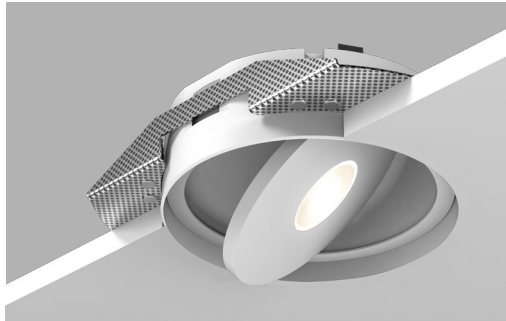

FlatLED T1 (Lens)

Trimless

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 12.9W - 1335lm 1241.37.24.927.XX

3000K - Ra90 - 12.9W - 1388lm 1241.37.24.930.XX

4000K - Ra90 - 12.9W - 1409lm 1241.37.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 12.9W - 1335lm 1241.37.25.927.XX

3000K - Ra90 - 12.9W - 1388lm 1241.37.25.930.XX

4000K - Ra90 - 12.9W - 1409lm 1241.37.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 12.9W - 1335lm 1241.37.26.927.XX

3000K - Ra90 - 12.9W - 1388lm 1241.37.26.930.XX


4000K - Ra90 - 12.9W - 1409lm 1241.37.26.940.XX

Mains dim (Driver 493.27.20 incl.)

2700K - Ra90 - 12.9W - 1335lm 1241.37.27.927.XX

3000K - Ra90 - 12.9W - 1388lm 1241.37.27.930.XX

4000K - Ra90 - 12.9W - 1409lm 1241.37.27.940.XX

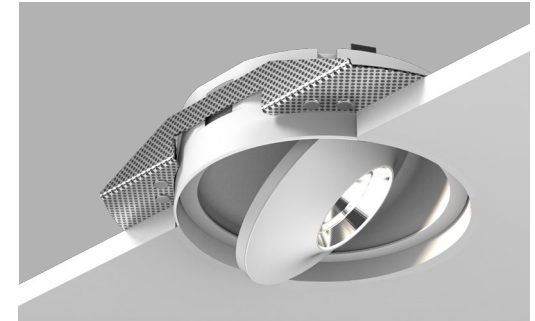

FlatLED T2 (Reflector)

Trimless

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 12.9W - 1335lm 1242.AA.24.927.XX

3000K - Ra90 - 12.9W - 1388lm 1242.AA.24.930.XX

4000K - Ra90 - 12.9W - 1409lm 1242.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 12.9W - 1335lm 1242.AA.25.927.XX

3000K - Ra90 - 12.9W - 1388lm 1242.AA.25.930.XX

4000K - Ra90 - 12.9W - 1409lm 1242.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 12.9W - 1335lm 1242.AA.26.927.XX

3000K - Ra90 - 12.9W - 1388lm 1242.AA.26.930.XX

4000K - Ra90 - 12.9W - 1409lm 1242.AA.26.940.XX

Mains dim (Driver 493.27.20 incl.)

2700K - Ra90 - 12.9W - 1335lm 1242.AA.27.927.XX

3000K - Ra90 - 12.9W - 1388lm 1242.AA.27.930.XX

4000K - Ra90 - 12.9W - 1409lm 1242.AA.27.940.XX


27° Reflector: 000.27.00.000.00

43° Reflector: 000.43.00.000.00

Available colors: 000.00.00.000.XX


Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

07



Anthracite Matt Text.
Standard

03



Black Matt Text.
Standard

25




Smoked Brown Text.
Standard

11



Black + Gold Matt

16



Gold Matt