

Juno Orientation



Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustable	No
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty: see p.308	

Bridgelux Vero 10 LED (150mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 458lm (127lm/W) 3000K - Ra90: 476lm (132lm/W) 4000K - Ra90: 487lm (135lm/W)
Luminous Flux System	2700K - Ra90: 380lm (95lm/W) 3000K - Ra90: 400lm (100lm/W) 4000K - Ra90: 409lm (102lm/W)
LED Power	3.6W (excl. driver)
System Power	4.1W (incl. driver)
Current	150mA
Forward voltage	21.4V (min.) - 24V (typ.) - 26.5V (max.)



Trapezium springs
Bended steel sides for easy
insertion & removal in ceiling

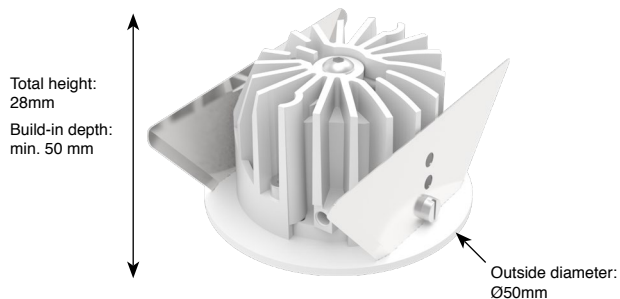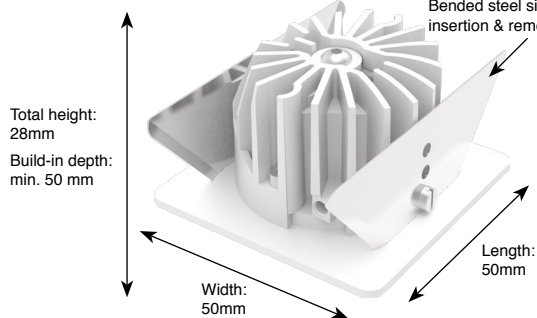

**Weight: 200g
(excl. driver)**




Driver:
- Included in article number and included in price
- External/Remote installation



Data sheets and wiring guide: see website
Driver information: see p.294-295

On Request

Bridgelux Vero10 CRI Ra97

Detail:

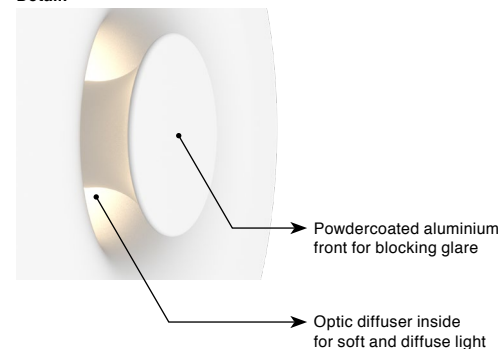

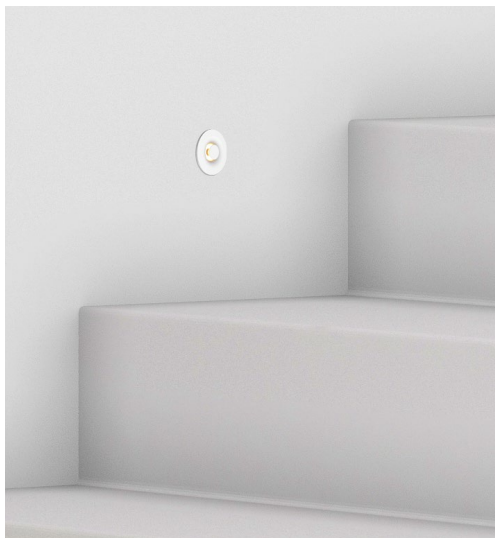

Juno Orientation

Round

PRICES INCL. DRIVERS

Soft Beam / Non dim (Driver 494.24.06 incl.)

2700K - Ra90 - 4.1W - 380lm


1509.44.24.927.XX

3000K - Ra90 - 4.1W - 400lm

1509.44.24.930.XX

4000K - Ra90 - 4.1W - 409lm

1509.44.24.940.XX



Juno Orientation

Square

PRICES INCL. DRIVERS

Soft Beam / Non dim (Driver 494.24.06 incl.)

2700K - Ra90 - 4.1W - 380lm

1508.44.24.927.XX

3000K - Ra90 - 4.1W - 400lm

1508.44.24.930.XX

4000K - Ra90 - 4.1W - 409lm

1508.44.24.940.XX

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White Matt Text.
Standard

18



Grey Matt Text.
Standard

03



Black Matt Text.
Standard

25



Smoked Brown Text.
Standard

16



Gold Matt
Standard