

Titan 200

Surface Mounted

Type	Downlight
Mounting	Surface Mounted
Material	Aluminium
Adjustable	Yes (90°/359°)
El. class / IP	Class I / IP20
Warranty:	see p.308


Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)

Bridgelux Dim-to-warm LED (250mA)

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux LED	LED: 860lm - System: 732lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)

DIM TO WARM

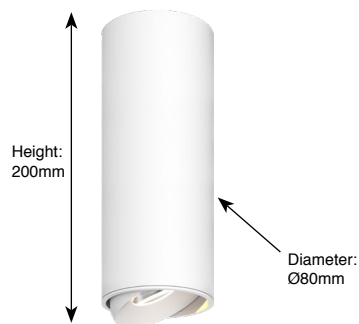

Weight: 730g



Driver:

- Integrated in luminaire
- Included in article number and price

Data sheets and wiring guide: see website

Optional suspension sets

- Standard connecting box comes in the same color as the luminaire housing
- Mounting accessories included
- Strain relief integrated
- Textile (polyester) power cable included, 2000mm


Luminaire color white: white cable

Luminaire color black, brown, gold, copper, corten: black cable

Luminaire color grey, anthracite: grey cable

On Request

Bridgelux Vero10 CRI Ra97



Suspension set 2000mm

White 2000mm - 3x0.75mm²	103.03.01-2
White 2000mm - 5x0.75mm²	103.05.01-2
Black 2000mm - 3x0.75mm²	103.03.03-2
Black 2000mm - 5x0.75mm²	103.05.03-2
Grey 2000mm - 3x0.75mm²	103.03.18-2
Grey 2000mm - 5x0.75mm²	103.05.18-2



Titan 200 Surface Mounted

Cone

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1214.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1214.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1214.AA.24.940.XX

1-10V dim

2700K - Ra90 - 10.2W - 937lm	1214.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1214.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1214.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 937lm	1214.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1214.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1214.AA.26.940.XX
Dim to Warm - 9.4W - 732lm	1214.AA.26.DTW.XX

Mains dim

2700K - Ra90 - 10.2W - 937lm	1214.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1214.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1214.AA.27.940.XX
Dim to Warm - 9.4W - 732lm	1214.AA.27.DTW.XX

Push dim

2700K - Ra90 - 10.2W - 937lm	1214.AA.29.927.XX
3000K - Ra90 - 10.2W - 984lm	1214.AA.29.930.XX
4000K - Ra90 - 10.2W - 998lm	1214.AA.29.940.XX



Titan 200 Surface Mounted

Organic

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1215.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1215.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1215.AA.24.940.XX

1-10V dim

2700K - Ra90 - 10.2W - 937lm	1215.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1215.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1215.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 937lm	1215.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1215.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1215.AA.26.940.XX
Dim to Warm - 9.4W - 732lm	1215.AA.26.DTW.XX

Mains dim

2700K - Ra90 - 10.2W - 937lm	1215.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1215.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1215.AA.27.940.XX
Dim to Warm - 9.4W - 732lm	1215.AA.27.DTW.XX

Push dim

2700K - Ra90 - 10.2W - 937lm	1215.AA.29.927.XX
3000K - Ra90 - 10.2W - 984lm	1215.AA.29.930.XX
4000K - Ra90 - 10.2W - 998lm	1215.AA.29.940.XX



Titan 200 Surface Mounted

Anti-Glare

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1216.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1216.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1216.AA.24.940.XX

1-10V dim

2700K - Ra90 - 10.2W - 937lm	1216.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1216.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1216.AA.25.940.XX

DALI dim

2700K - Ra90 - 10.2W - 937lm	1216.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1216.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1216.AA.26.940.XX
Dim to Warm - 9.4W - 732lm	1216.AA.26.DTW.XX

Mains dim

2700K - Ra90 - 10.2W - 937lm	1216.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1216.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1216.AA.27.940.XX
Dim to Warm - 9.4W - 732lm	1216.AA.27.DTW.XX

Push dim

2700K - Ra90 - 10.2W - 937lm	1216.AA.29.927.XX
3000K - Ra90 - 10.2W - 984lm	1216.AA.29.930.XX
4000K - Ra90 - 10.2W - 998lm	1216.AA.29.940.XX

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request



01 White Matt Text.
Standard



18 Grey Matt Text.
Standard



03 Black Matt Text.
Standard



25 Smoked Brown Text. Black + Gold Matt
Standard



11 Gold Matt



16 Gold Matt