

Titan Double Rectangle

Type Multiple Downlight
Mounting Recessed
Material Aluminium
Adjustable Yes (40°/359°)
El. class / IP Class III / IP20
El. class driver Class II
Warranty: see p.308

Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
CRI Ra90 (Ra80 on request)
SDCM 3
Luminous Flux LED
2700K - Ra90: 1100lm (124lm/W)
3000K - Ra90: 1156lm (130lm/W)
4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System
2700K - Ra90: 937lm (92lm/W)
3000K - Ra90: 984lm (96lm/W)
4000K - Ra90: 998lm (98lm/W)
Beam angle 28° / 40°
LED Power 8.9W / 350mA (excl. driver)
System Power 10.2W / 350mA (incl. driver)
Forward voltage 23V (min.) - 25.5V (typ.) - 28V (max.)


Bridgelux Dim-to-warm LED (250mA)

CCT Dim-to-warm 1800-3000K
CRI Ra90
Luminous Flux LED: 860lm - System: 732lm
LED Power 8.2W / 250mA (excl. driver)
System Power 9.4W / 250mA (incl. driver)

DIM TO WARM



Height: 75mm
Build-in depth: 95mm

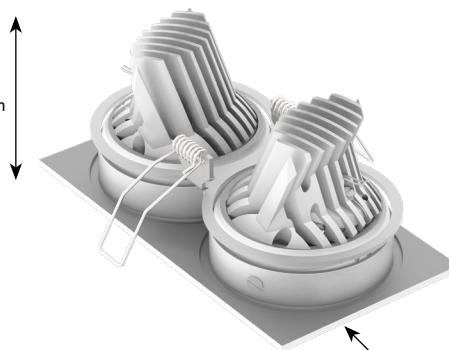

Outside measurements:
172mm x 92mm

Weight: 900g
(excl. driver)



Driver:

- Included in article number and included in price
- External/Remote installation


Data sheets and wiring guide: see website
Driver information: see p.294-295

On Request

Bridgelux Vero10 CRI Ra97

Air circulation notice:

Do not topload with insulation materials



BOOBYTRAP SPRINGS



Titan Double Rectangle

Cone

PRICES INCL. DRIVERS

Non dim (2x Driver 490.24.16 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1100.[AA.24.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1100.[AA.24.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1100.[AA.24.940.XX](#)

1-10V dim & Push dim (2x Driver 490.25.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1100.[AA.25.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1100.[AA.25.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1100.[AA.25.940.XX](#)

DALI dim (2x Driver 490.26.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1100.[AA.26.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1100.[AA.26.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1100.[AA.26.940.XX](#)

Mains dim (2x Driver 490.27.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1100.[AA.27.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1100.[AA.27.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1100.[AA.27.940.XX](#)

DALI dim / Dim to Warm 1800-3000K (2x Driver 490.26.20 incl.)
 (2x) DTW (DALI dim) - 9.4W - 732lm 1100.[AA.26.dtw.XX](#)

Mains dim / Dim to Warm 1800-3000K (2x Driver 497.27.20 incl.)
 (2x) DTW (mains dim) - 9.4W - 732lm 1100.[AA.27.dtw.XX](#)



Titan Double Rectangle

Organic

PRICES INCL. DRIVERS

Non dim (2x Driver 490.24.16 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1102.[AA.24.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1102.[AA.24.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1102.[AA.24.940.XX](#)

1-10V dim & Push dim (2x Driver 490.25.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1102.[AA.25.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1102.[AA.25.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1102.[AA.25.940.XX](#)

DALI dim (2x Driver 490.26.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1102.[AA.26.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1102.[AA.26.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1102.[AA.26.940.XX](#)

Mains dim (2x Driver 490.27.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1102.[AA.27.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1102.[AA.27.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1102.[AA.27.940.XX](#)

DALI dim / Dim to Warm 1800-3000K (2x Driver 490.26.20 incl.)
 (2x) DTW (DALI dim) - 9.4W - 732lm 1102.[AA.26.dtw.XX](#)

Mains dim / Dim to Warm 1800-3000K (2x Driver 497.27.20 incl.)
 (2x) DTW (mains dim) - 9.4W - 732lm 1102.[AA.27.dtw.XX](#)



Titan Double Rectangle

Anti-glare

PRICES INCL. DRIVERS

Non dim (2x Driver 490.24.16 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1101.[AA.24.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1101.[AA.24.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1101.[AA.24.940.XX](#)

1-10V dim & Push dim (2x Driver 490.25.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1101.[AA.25.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1101.[AA.25.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1101.[AA.25.940.XX](#)

DALI dim (2x Driver 490.26.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1101.[AA.26.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1101.[AA.26.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1101.[AA.26.940.XX](#)


Mains dim (2x Driver 490.27.20 incl.)
 (2x) 2700K - Ra90 - 10.2W - 937lm 1101.[AA.27.927.XX](#)
 (2x) 3000K - Ra90 - 10.2W - 984lm 1101.[AA.27.930.XX](#)
 (2x) 4000K - Ra90 - 10.2W - 998lm 1101.[AA.27.940.XX](#)

DALI dim / Dim to Warm 1800-3000K (2x Driver 490.26.20 incl.)
 (2x) DTW (DALI dim) - 9.4W - 732lm 1101.[AA.26.dtw.XX](#)

Mains dim / Dim to Warm 1800-3000K (2x Driver 497.27.20 incl.)
 (2x) DTW (mains dim) - 9.4W - 732lm 1101.[AA.27.dtw.XX](#)

28° Reflector: 0000.[28.00.000.00](#)
 40° Reflector: 0000.[40.00.000.00](#)

Available colors: 0000.00.00.000.[XX](#)
 Other RAL colors on request



01
White Matt Text.
Standard




18
Grey Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text. Black + Gold Matt
Standard



16
Gold Matt