

Titan Trimless Deep

Type	Trimless downlight
Mounting	Trimless
Material	Aluminium
Adjustable	Yes (40°/359°)
El. class / IP	Class III / IP20
El. class driver	Class II
Warranty:	see p.308

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)
Forward voltage	23V (min.) - 25.5V (typ.) - 28V (max.)

Bridgelux Dim-to-warm LED (250mA)

CCT	Dim-to-warm 1800-3000K
CRI	Ra90
Luminous Flux	LED: 860lm - System: 732lm
LED Power	8.2W / 250mA (excl. driver)
System Power	9.4W / 250mA (incl. driver)


DIM TO WARM



Spot dimensions: Ø84mm x height 82mm


Trimless gypkit included

Adjustable ceiling thickness 9-25mm

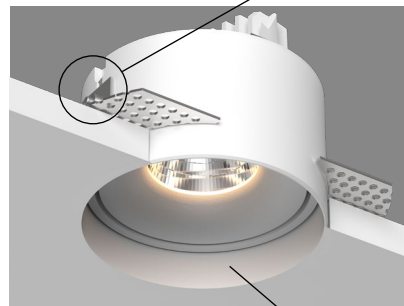

Recessed height: 16mm

Weight: 380g
(excl. driver)

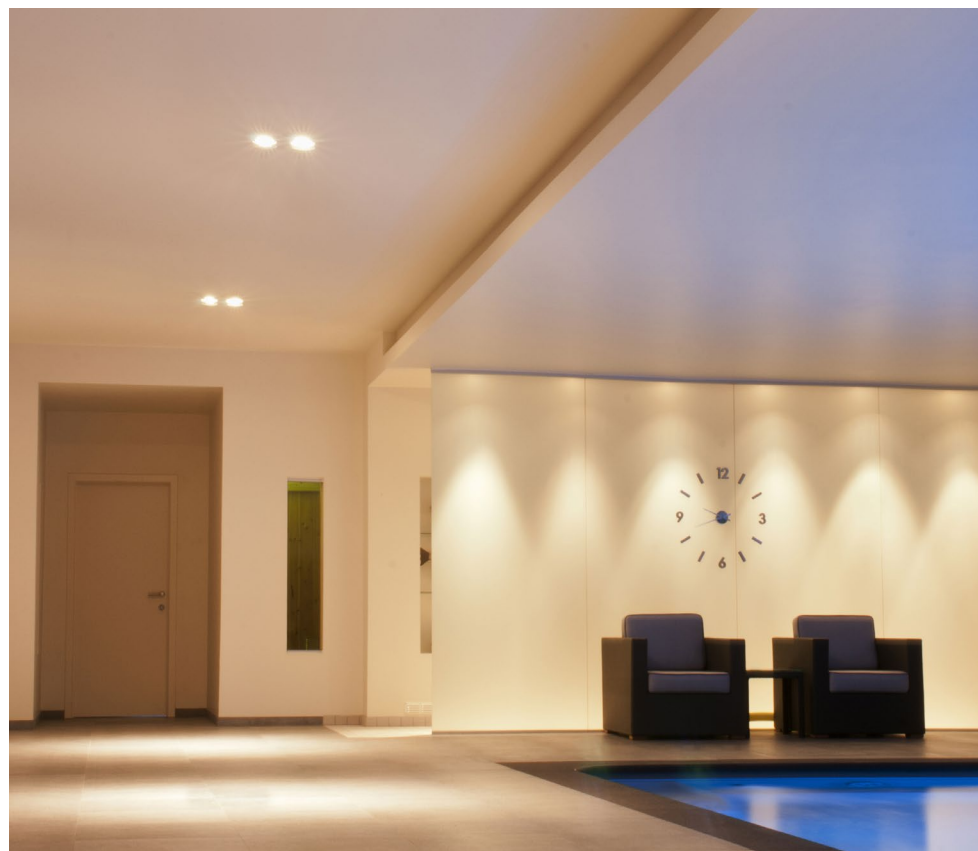

Driver:

- Included in article number and included in price
- External/Remote installation

Data sheets and wiring guide: see website



Driver information: see p.294-295


On Request

Bridgelux Vero10 CRI Ra97

Air circulation notice:

Do not topload with insulation materials

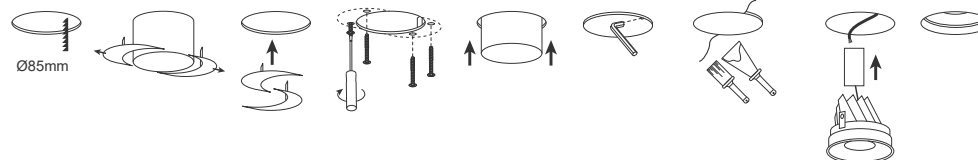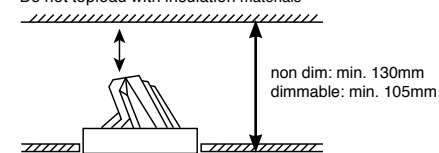

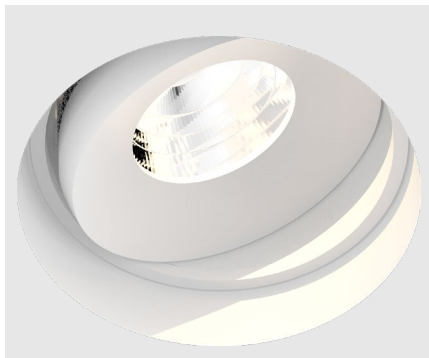

Titan Trimless Deep

Cone

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1019.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1019.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1019.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1019.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1019.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1019.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1019.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1019.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1019.AA.26.940.XX

Mains dim (Driver 490.27.20 incl.)


2700K - Ra90 - 10.2W - 937lm	1019.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1019.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1019.AA.27.940.XX

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1019.AA.26.dtw.XX
-------------------------------	-------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1019.AA.27.dtw.XX
--------------------------------	-------------------

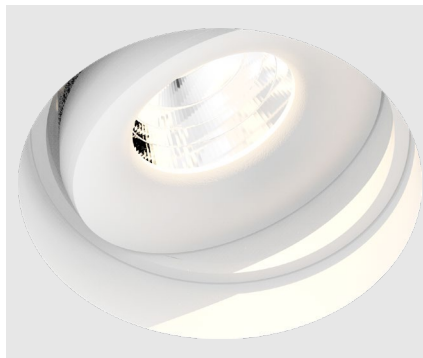

Titan Trimless Deep

Organic

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1020.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1020.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1020.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1020.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1020.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1020.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1020.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1020.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1020.AA.26.940.XX

Mains dim (Driver 490.27.20 incl.)


2700K - Ra90 - 10.2W - 937lm	1020.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1020.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1020.AA.27.940.XX

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1020.AA.26.dtw.XX
-------------------------------	-------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1020.AA.27.dtw.XX
--------------------------------	-------------------

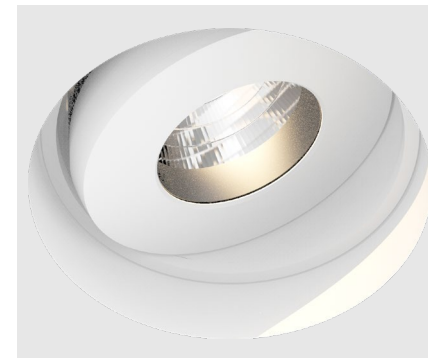

Titan Trimless Deep

Anti-glare

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1021.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1021.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1021.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1021.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1021.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1021.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1021.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1021.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1021.AA.26.940.XX

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1021.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1021.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1021.AA.27.940.XX

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1021.AA.26.dtw.XX
-------------------------------	-------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1021.AA.27.dtw.XX
--------------------------------	-------------------

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request



01
White Matt Text.
Standard



18
Grey Matt Text.
Standard




07
Anthracite Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text.
Standard



16
Gold Matt
Standard