

Tunnel

Double / Triple Round


Type Lounge
 Mounting Suspended
 Material Polycarbonate (850°C)
 Aluminium Powdercoated end plates
 El. class / IP Class I / IP20
 Warranty: see p.308

Module Tunnel 1200 - Philips Fortimo LED Line HV

Luminous Flux 3000K - Ra80: 9664lm (163lm/W)
 LED 4000K - Ra80: 10400lm (176lm/W)
 Luminous Flux 3000K - Ra80: 7966lm (113lm/W)
 System 4000K - Ra80: 8573lm (122lm/W)
 LED power 59.2W (excl. driver)
 System power 70.5W (incl. driver)

Suspension set (included):

- White ceiling box
- Integrated strain relief
- Two steel suspension wires + two steel connecting wires
- 230V White textile supply cable

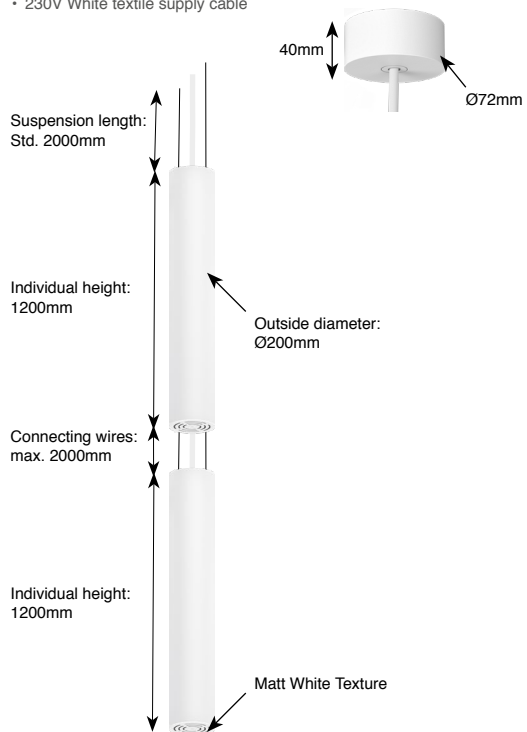

Options

Suspension + White power cable 4000mm (between ceiling and first Tunnel)

Suspension + 3x0.75mm² 102.23.01-4

Suspension + 5x0.75mm² 102.25.01-4

On request

Recessed connecting box (more info on p.300/p.305)

Trimless connecting box (more info on p.300/p.305)



Tunnel LED

Double Round

Philips Fortimo LED Line (2x)10400lm

3000K - Ra80 - Non dimmable	329.10000.830.01
3000K - Ra80 - 1-10V dimmable	329.10000.830.01-D
3000K - Ra80 - Touch & DALI dim.	329.10000.830.01-TD
4000K - Ra80 - Non dimmable	329.10000.840.01
4000K - Ra80 - 1-10V dimmable	329.10000.840.01-D
4000K - Ra80 - Touch & DALI dim.	329.10000.840.01-TD



Tunnel LED

Triple Round

Philips Fortimo LED Line (3x)10400lm

3000K - Ra80 - Non dimmable	339.10000.830.01
3000K - Ra80 - 1-10V dimmable	339.10000.830.01-D
3000K - Ra80 - Touch & DALI dim.	339.10000.830.01-TD
4000K - Ra80 - Non dimmable	339.10000.840.01
4000K - Ra80 - 1-10V dimmable	339.10000.840.01-D
4000K - Ra80 - Touch & DALI dim.	339.10000.840.01-TD

