

THE BLACK LINE TRIM 2 SPOTS

Number of heads

Mounting Ceiling recessed

Lamps descriptionPower LED 6,5W 2 x 197 lm 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle II° Spot

ELECTRICAL

Transformer availability

Separate item

Remote

Transformer type

Electronic

Emergency

Uithout


Class III

PHYSICAL

Length (mm) 231 Recessed depth (mm) 101

Construction material Extruded aluminum

Weight (kg) 0,84

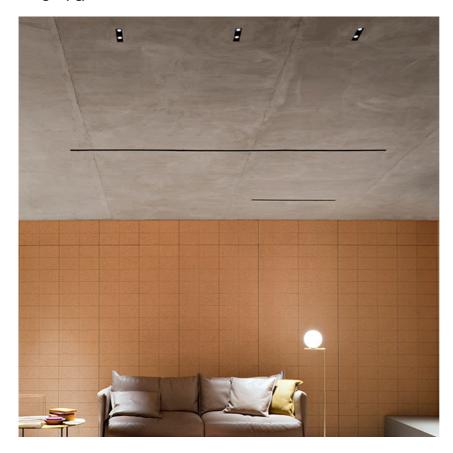




The Black Line Trim 2 Spots designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. 1050 mA remote power supply not included.

03.0051.00A - 341Im Primer 03.0051.40A - 341Im White



CERTIFICATIONS











Flos.architectural@flos.com www.flos.com



The Black Line Trim 2 Spots . Accessories

Power Supply







Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/ 900/1050mA Dali switch, I-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

60.8670

Constant Current Power Supply for LED. 22W / 1050 MA Non dimmable continuous current power supply 220/240V - 50/60Hz. (110V = 12W)

Maximum lenght of 1.5 mm2 secundary conductor (m): 20

Maximum lenght of 2.5 mm2 secundary conductor (m): 30

The Black Line Trim 2 Spots . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:


Power LED



The Black Line Trim 2 Spots designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. 1050 mA remote power supply not included.

03.0051.00A - 341Im Primer 03.0051.40A - 341Im White



CERTIFICATIONS













Flos.architectural@flos.com www.flos.com