

THE BLACK LINE TRIM 2 SPOTS

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 6,5W 2 x 200 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	42° Flood

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Length (mm)	231
Recessed depth (mm)	101
Construction material	Extruded aluminum
Weight (kg)	0,84




The Black Line Trim 2 Spots
designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. 1050 mA remote power supply not included.

- 03.0052.00A - 356lm Primer
- 03.0052.40A - 356lm White



CERTIFICATIONS

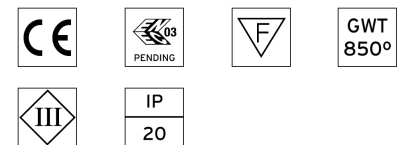

The Black Line Trim 2 Spots . Accessories

Power Supply



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15

60.8670

Constant Current Power Supply for LED. 22W / 1050 mA

Non dimmable continuous current power supply 220/240V - 50/60Hz. (110V = 12V)

Maximum length of 1.5 mm² secondary conductor (m): 20


Maximum length of 2.5 mm² secondary conductor (m): 30



The Black Line Trim 2 Spots designed by FLOS Architectural

Recessed integrated luminaire with 2 LED lighting spots. 1050 mA remote power supply not included.

- 03.0052.00A - 356lm Primer
- 03.0052.40A - 356lm White



The Black Line Trim 2 Spots . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED

CERTIFICATIONS

