

## THE BLACK LINE TRIM 8 SPOTS

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Power LED 26W 8 x 200 lm 3000K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	42° Flood

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class III

### PHYSICAL



<b>Length (mm)</b>	711
<b>Recessed depth (mm)</b>	101
<b>Construction material</b>	Extruded aluminum
<b>Weight (kg)</b>	2,54




**The Black Line Trim 8 Spots**  
designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. 1050 mA remote power supply not included.

- 03.0060.00A - 1426lm Primer
- 03.0060.40A - 1426lm White

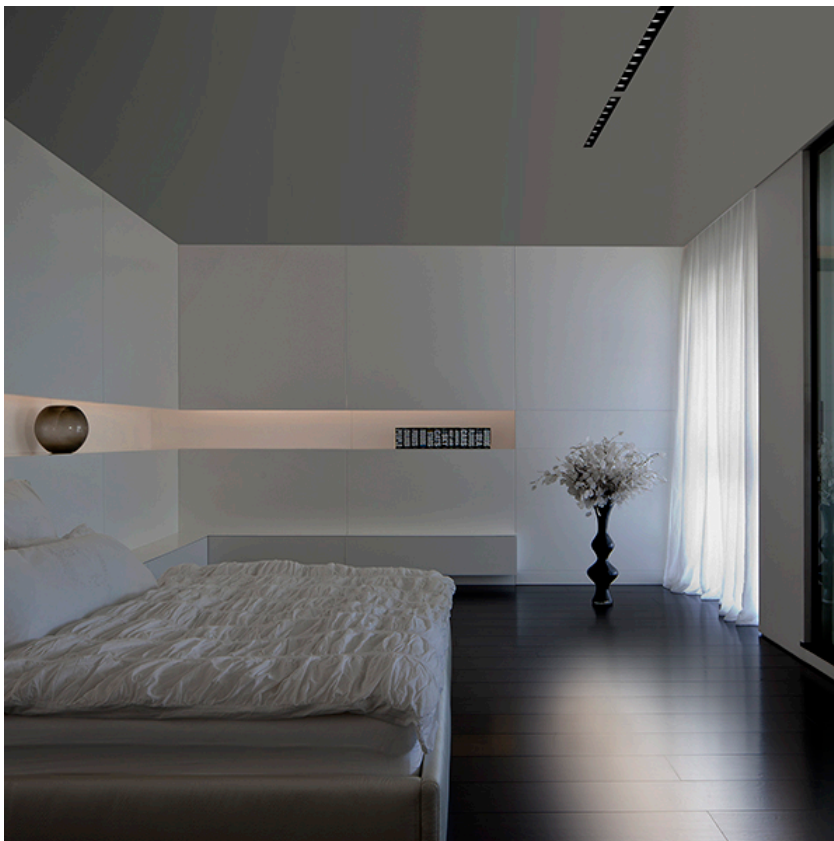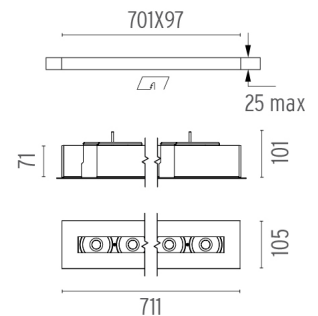

### CERTIFICATIONS

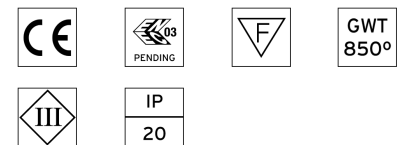

## The Black Line Trim 8 Spots . Accessories

### Power Supply



60.8530

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm2 secondary conductor (m): 10

Maximum length of 2.5 mm2 secondary conductor (m): 15

60.8548

#### Constant Current Power Supply for LED. 24/33W

Continuous current power supply of 24/33W, 220/240V - 50/60Hz with power current selected through adjustable 500/1050 mA.

Maximum length of 1.5 mm2 secondary conductor (m): 20

Maximum length of 2.5 mm2 secondary conductor (m): 30

60.9276

#### Continuous current power supply of 20-40W

Continuous current power supply of 20-40W, 110/240V - 50/60Hz with power current selected through adjustable 350/400/500/550/600/650/700/750/-800/850/900/950 mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm2 secondary conductor (m): 10


Maximum length of 2.5 mm2 secondary conductor (m): 15



**The Black Line Trim 8 Spots**  
designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. 1050 mA remote power supply not included.

- 03.0060.00A - 1426lm Primer
- 03.0060.40A - 1426lm White

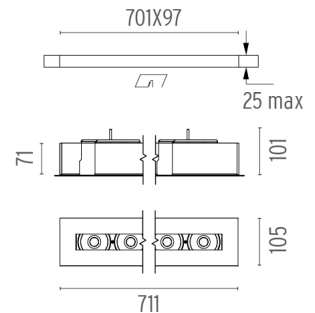

## The Black Line Trim 8 Spots . Lamps



### Power LED

#### Lamp category:

LED

#### Socket:

Special base

#### Lamp type:

Power LED

### CERTIFICATIONS

