

THE BLACK LINE TRIM 8 SPOTS

Number of heads	1
Mounting	Ceiling recessed
Lamps description	Power LED 26W 8 x 197 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	42° Flood

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL



Length (mm)	711
Recessed depth (mm)	101
Construction material	Extruded aluminum
Weight (kg)	2,54




The Black Line Trim 8 Spots
designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. 1050 mA remote power supply not included.

- 03.0061.00A - 1252lm Primer
- 03.0061.40A - 1252lm White

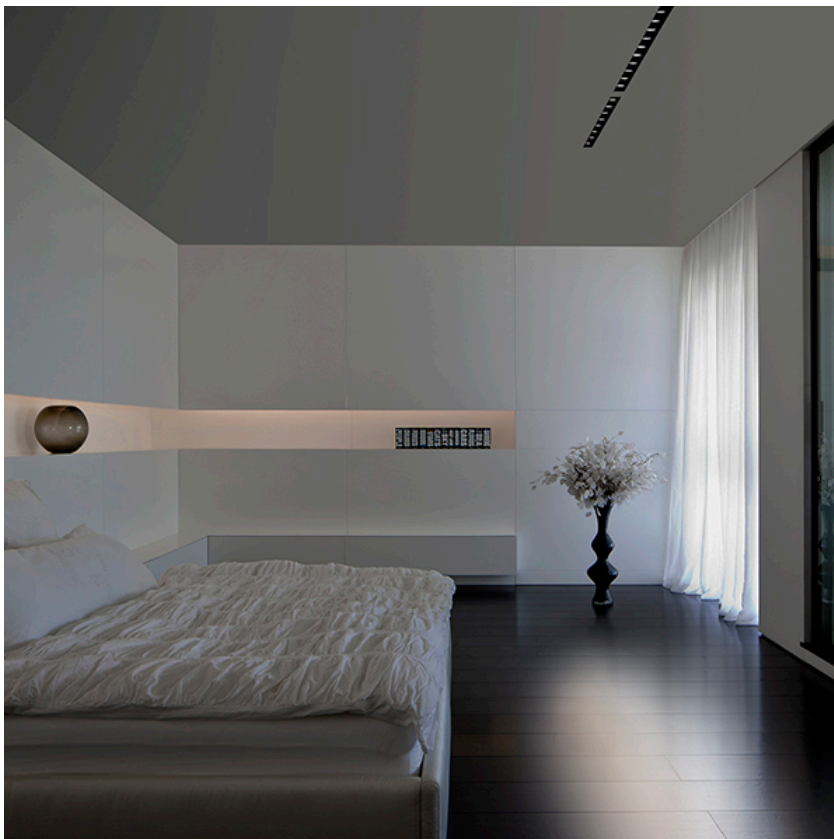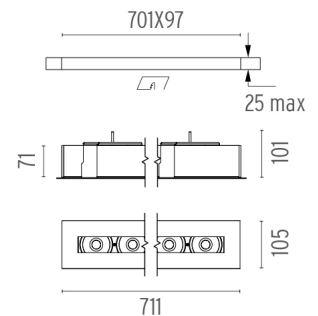

CERTIFICATIONS

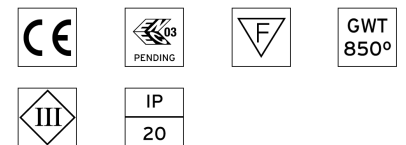

The Black Line Trim 8 Spots . Accessories

Power Supply



60.8530

Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm2 secondary conductor (m): 10

Maximum length of 2.5 mm2 secondary conductor (m): 15

60.8548

Constant Current Power Supply for LED. 24/33W

Continuous current power supply of 24/33W, 220/240V - 50/60Hz with power current selected through adjustable 500/1050 mA.

Maximum length of 1.5 mm2 secondary conductor (m): 20

Maximum length of 2.5 mm2 secondary conductor (m): 30

60.9276

Continuous current power supply of 20-40W

Continuous current power supply of 20-40W, 110/240V - 50/60Hz with power current selected through adjustable 350/400/500/550/600/650/700/750/800/850/900/950 mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm2 secondary conductor (m): 10


Maximum length of 2.5 mm2 secondary conductor (m): 15



The Black Line Trim 8 Spots
designed by FLOS Architectural

Recessed integrated luminaire with 8 LED lighting spots. 1050 mA remote power supply not included.

- 03.0061.00A - 1252lm Primer
- 03.0061.40A - 1252lm White

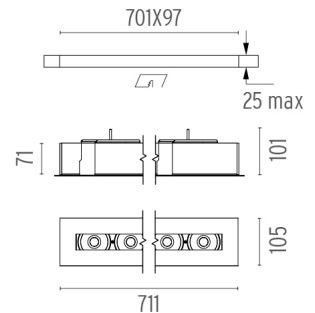

The Black Line Trim 8 Spots . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED

CERTIFICATIONS

