


COMPASS BOX SMALL 1L

Number of heads	1
Mounting	Ceiling surface
Lamps description	QR-CBC 5I GX5.3 Max 35W or LED QR-CBC 5I GX5.3 7/10W
Bezel and trim dimension	100 x 100
Voltage (V)	220/240
Environment	Indoor



OPTICAL

Light controller description	Bare Lamps
Aiming	Adjustable
Beam angle	10°, 24°, 25°, 36°, 38°, 60°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class I


PHYSICAL

Length (mm)	100
Width (mm)	100
Height (mm)	160
Construction material	Aluminium
Weight (kg)	1



Compass Box Small 1L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "leading and trailing edge" dimmer

03.2600.30	Matt white
03.2600.29	Anodised aluminium
03.2600.14	Matt black
03.2600.WG	Wenge
03.2600.TK	Teak



CERTIFICATIONS

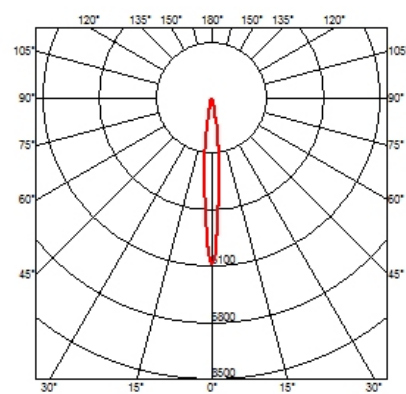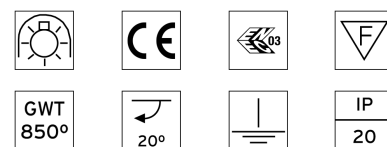

Compass Box Small IL . Accessories

Optical



08.8196.14

Honeycomb

"Honeycomb" anti-glare grid in aluminium cells with black liquid paint finish.



08.8238.14

Screening cylinder

Screening cylinder with rotating pin in a black thermoplastic material



Compass Box Small IL designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "leading and trailing edge" dimmer

03.2600.30	Matt white
03.2600.29	Anodised aluminium
03.2600.14	Matt black
03.2600.WG	Wenge
03.2600.TK	Teak

Compass Box Small IL . Lamps



60.6392

QR-CBC 5I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6392

Lamp type:
QR-CBC 5I



60.6393

QR-CBC 5I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6393

Lamp type:
QR-CBC 5I



60.6394

QR-CBC 5I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage


Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6394

Lamp type:
QR-CBC 5I



CERTIFICATIONS




GWT
850°



20°



IP
20

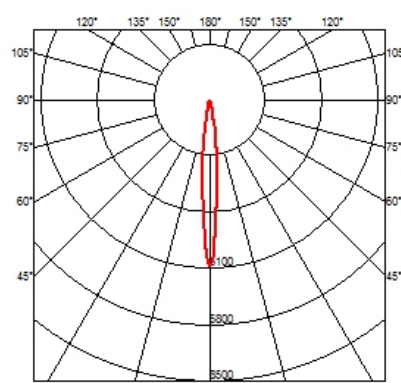

Compass Box Small IL . Lamps



60.6395

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6395

Lamp type:
QR-CBC 51



60.6355

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6355

Lamp type:
QR-CBC 51



60.6356

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage


Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6356

Lamp type:
QR-CBC 51



Compass Box Small IL designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "leading and trailing edge" dimmer

03.2600.30	Matt white
03.2600.29	Anodised aluminium
03.2600.14	Matt black
03.2600.WG	Wenge
03.2600.TK	Teak



60.6357

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6357

Lamp type:
QR-CBC 51



BU19

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU19

Lamp type:
QR-CBC 51



BU20

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage


Socket:
GX5.3

Lamp angle:
38 °


Color temperature (K):
3000 °K

Catalog reference:
BU20

Lamp type:
QR-CBC 51



CERTIFICATIONS

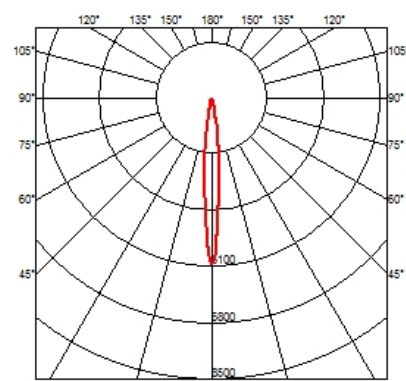

Compass Box Small IL . Lamps



60.6891

LED QR-CBC 51

Lamp Watt:

8 W

Lamp category:

LED

Socket:

GX5.3

Lamp angle:

24 °

Color temperature (K):

3000 °K

Catalog reference:

60.6891

Lamp type:

LED QR-CBC 51




Compass Box Small IL

designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "leading and trailing edge" dimmer

03.2600.30	Matt white
03.2600.29	Anodised aluminium
03.2600.14	Matt black
03.2600.WG	Wenge
03.2600.TK	Teak



CERTIFICATIONS

