

## COMPASS BOX SMALL 2L

|                          |                                                              |
|--------------------------|--------------------------------------------------------------|
| Number of heads          | 2                                                            |
| Mounting                 | Ceiling surface                                              |
| Lamps description        | 2 x QR-CBC 5I GX5.3 Max 35W or 2 x LED QR-CBC 5I GX5.3 7/10W |
| Bezel and trim dimension | 100 x 174                                                    |
| Voltage (V)              | 220/240                                                      |
| Environment              | Indoor                                                       |



### OPTICAL

|                              |                              |
|------------------------------|------------------------------|
| Light controller description | Bare Lamps                   |
| Aiming                       | Adjustable                   |
| Beam angle                   | 10°, 24°, 25°, 36°, 38°, 60° |

### ELECTRICAL

|                          |                     |
|--------------------------|---------------------|
| Transformer availability | Included            |
| Transformer mounting     | Integral            |
| Transformer type         | Electronic dimmable |
| Emergency                | Without             |
| Insulation class         | Class I             |


### PHYSICAL

|                       |           |
|-----------------------|-----------|
| Length (mm)           | 100       |
| Width (mm)            | 174       |
| Height (mm)           | 160       |
| Construction material | Aluminium |
| Weight (kg)           | 1,50      |



### Compass Box Small 2L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "trailing edge" dimmer

|            |                    |
|------------|--------------------|
| 03.2601.30 | Matt white         |
| 03.2601.29 | Anodised aluminium |
| 03.2601.14 | Matt black         |
| 03.2601.WG | Wenge              |
| 03.2601.TK | Teak               |



### CERTIFICATIONS

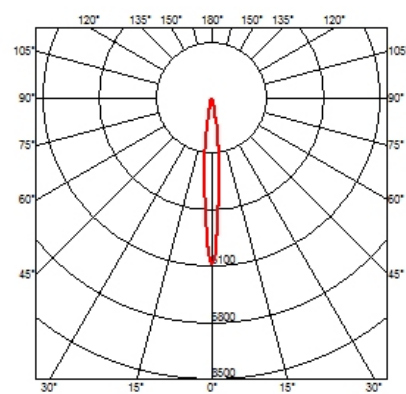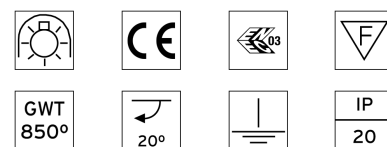

## Compass Box Small 2L . Accessories

### Optical



08.8196.14

#### Honeycomb

"Honeycomb" anti-glare grid in aluminium cells with black liquid paint finish.



08.8238.14

#### Screening cylinder

Screening cylinder with rotating pin in a black thermoplastic material



### Compass Box Small 2L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "trailing edge" dimmer

|            |                    |
|------------|--------------------|
| 03.2601.30 | Matt white         |
| 03.2601.29 | Anodised aluminium |
| 03.2601.14 | Matt black         |
| 03.2601.WG | Wenge              |
| 03.2601.TK | Teak               |

## Compass Box Small 2L . Lamps



60.6392

#### QR-CBC 5I

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
10 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6392

**Lamp type:**  
QR-CBC 5I



60.6393

#### QR-CBC 5I

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6393

**Lamp type:**  
QR-CBC 5I



60.6394

#### QR-CBC 5I

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage


**Socket:**  
GX5.3

**Lamp angle:**  
38 °


**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6394

**Lamp type:**  
QR-CBC 5I



### CERTIFICATIONS

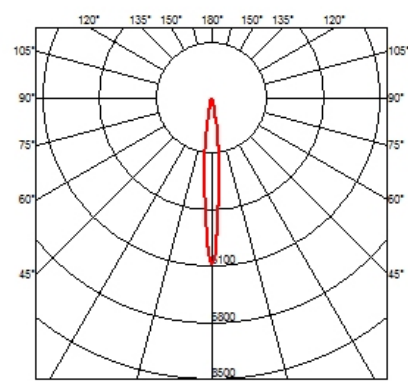

## Compass Box Small 2L . Lamps



60.6395

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6395

**Lamp type:**  
QR-CBC 51



60.6355

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6355

**Lamp type:**  
QR-CBC 51



60.6356

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6356

**Lamp type:**  
QR-CBC 51



### Compass Box Small 2L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "trailing edge" dimmer

|            |                    |
|------------|--------------------|
| 03.2601.30 | Matt white         |
| 03.2601.29 | Anodised aluminium |
| 03.2601.14 | Matt black         |
| 03.2601.WG | Wenge              |
| 03.2601.TK | Teak               |



60.6357

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6357

**Lamp type:**  
QR-CBC 51



BU19

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU19

**Lamp type:**  
QR-CBC 51



BU20

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage


**Socket:**  
GX5.3

**Lamp angle:**  
38 °


**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU20

**Lamp type:**  
QR-CBC 51



### CERTIFICATIONS

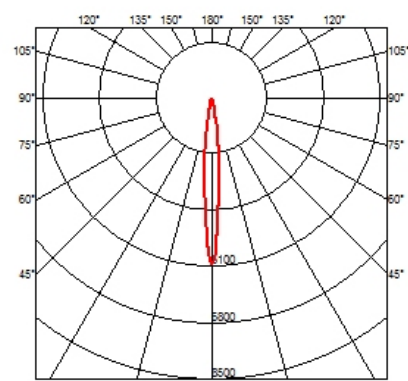

## Compass Box Small 2L . Lamps



60.6891

**LED QR-CBC 51**

**Lamp Watt:**

8 W

**Lamp category:**

LED

**Socket:**

GX5.3

**Lamp angle:**

24 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.6891

**Lamp type:**

LED QR-CBC 51




## Compass Box Small 2L

designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall. Electronic transformer integrated 220/240V 12V 50/60Hz. The light intensity may be adjusted by means of "trailing edge" dimmer

|            |                    |
|------------|--------------------|
| 03.2601.30 | Matt white         |
| 03.2601.29 | Anodised aluminium |
| 03.2601.14 | Matt black         |
| 03.2601.WG | Wenge              |
| 03.2601.TK | Teak               |



## CERTIFICATIONS

