

COMPASS BOX SMALL 2L

Number of heads	2
Mounting	Ceiling surface
Lamps description	2 x LED Array 6,2W 703 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor



OPTICAL

Aiming	Adjustable
Beam angle	18° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL


Length (mm)	174
Width (mm)	100
Height (mm)	160
Construction material	Aluminium
Weight (kg)	1,60

Compass Box Small 2L


designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

03.2635.30A - 2x589lm	Matt white
03.2635.29A - 2x589lm	Anodised aluminium
03.2635.14A - 2x589lm	Matt black
03.2635.WGA - 2x589lm	Wenge
03.2635.TKA - 2x589lm	Teak



CERTIFICATIONS

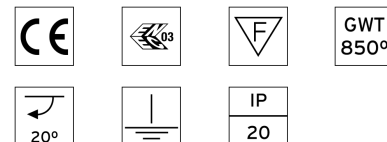

Compass Box Small 2L . Accessories

Optical



08.8196.14

Honeycomb

"Honeycomb" anti-glare grid in aluminium cells with black liquid paint finish.



08.8238.14

Screening cylinder

Screening cylinder with rotating pin in a black thermoplastic material




Compass Box Small 2L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

- 03.2635.30A - 2x589lm Matt white
- 03.2635.29A - 2x589lm Anodised aluminium
- 03.2635.14A - 2x589lm Matt black
- 03.2635.WGA - 2x589lm Wenge
- 03.2635.TKA - 2x589lm Teak

Compass Box Small 2L . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array



CERTIFICATIONS

