

## COMPASS BOX SMALL 2L

<b>Number of heads</b>	2
<b>Mounting</b>	Ceiling surface
<b>Lamps description</b>	2 x LED Array 6,2W 703 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor



### OPTICAL

<b>Aiming</b>	Adjustable
<b>Beam angle</b>	59° Wide Flood

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I


### PHYSICAL

<b>Length (mm)</b>	174
<b>Width (mm)</b>	100
<b>Height (mm)</b>	160
<b>Construction material</b>	Aluminium
<b>Weight (kg)</b>	1,60


### Compass Box Small 2L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

03.2637.30A - 2x552lm	Matt white
03.2637.29A - 2x552lm	Anodised aluminium
03.2637.14A - 2x552lm	Matt black
03.2637.WGA - 2x552lm	Wenge
03.2637.TKA - 2x552lm	Teak



### CERTIFICATIONS

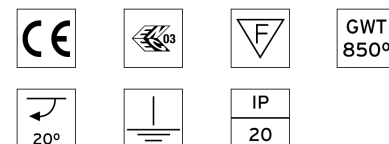

## Compass Box Small 2L . Accessories

### Optical



08.8196.14

#### Honeycomb

"Honeycomb" anti-glare grid in aluminium cells with black liquid paint finish.



08.8238.14

#### Screening cylinder

Screening cylinder with rotating pin in a black thermoplastic material




### Compass Box Small 2L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

- 03.2637.30A - 2x552lm Matt white
- 03.2637.29A - 2x552lm Anodised aluminium
- 03.2637.14A - 2x552lm Matt black
- 03.2637.WGA - 2x552lm Wenge
- 03.2637.TKA - 2x552lm Teak

## Compass Box Small 2L . Lamps



#### LED Array

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

LED Array



### CERTIFICATIONS

