

## COMPASS BOX SMALL 4L

Number of heads	4
Mounting	Ceiling surface
Lamps description	4 x LED Array 6,2W 703 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor

### OPTICAL

Aiming	Adjustable
Beam angle	18° Spot

### ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

### PHYSICAL

Length (mm)	325
Width (mm)	100
Height (mm)	160
Construction material	Aluminium
Weight (kg)	3




### Compass Box Small 4L


designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

03.2640.30A - 4x589lm	Matt white
03.2640.29A - 4x589lm	Anodised aluminium
03.2640.14A - 4x589lm	Matt black
03.2640.WGA - 4x589lm	Wenge
03.2640.TKA - 4x589lm	Teak



### CERTIFICATIONS

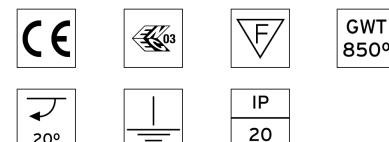

## Compass Box Small 4L . Accessories

### Optical



08.8196.14

#### Honeycomb

"Honeycomb" anti-glare grid in aluminium cells with black liquid paint finish.



08.8238.14

#### Screening cylinder

Screening cylinder with rotating pin in a black thermoplastic material




### Compass Box Small 4L designed by FLOS Architectural

Surface spotlight to be installed on ceiling/wall with LED light source. Non-regulable 220-240V, 50-60Hz power supply integrated in luminaire body.

- 03.2640.30A - 4x589lm Matt white
- 03.2640.29A - 4x589lm Anodised aluminium
- 03.2640.14A - 4x589lm Matt black
- 03.2640.WGA - 4x589lm Wenge
- 03.2640.TKA - 4x589lm Teak

## Compass Box Small 4L . Lamps



#### LED Array

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

LED Array



### CERTIFICATIONS

