

COMPASS IP65 Ø95

Number of heads	1
Mounting	Ceiling recessed
Lamps description	QR-CBC 5I GX5.3 Max 50W or LED QR-CBC 5I GX5.3 7W
Bezel diameter	95
Voltage (V)	12
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 24°, 25°, 36°, 38°, 60°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL


Cutout shape	Round
Diameter (mm)	95
Recessed depth (mm)	120
Construction material	Die-cast aluminum
Weight (kg)	0,50




Compass IP65 Ø95
designed by FLOS Architectural

12V halogen lamp recessed downlight.
Remote transformer not included

03.3502.30	Matt white
03.3502.02	Grey
03.3502.14	Matt black

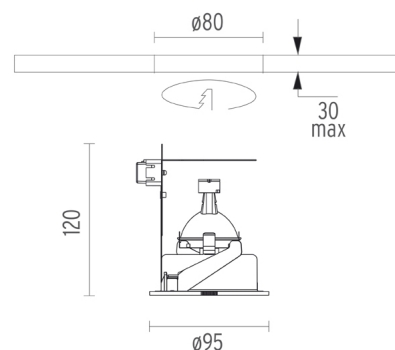

CERTIFICATIONS

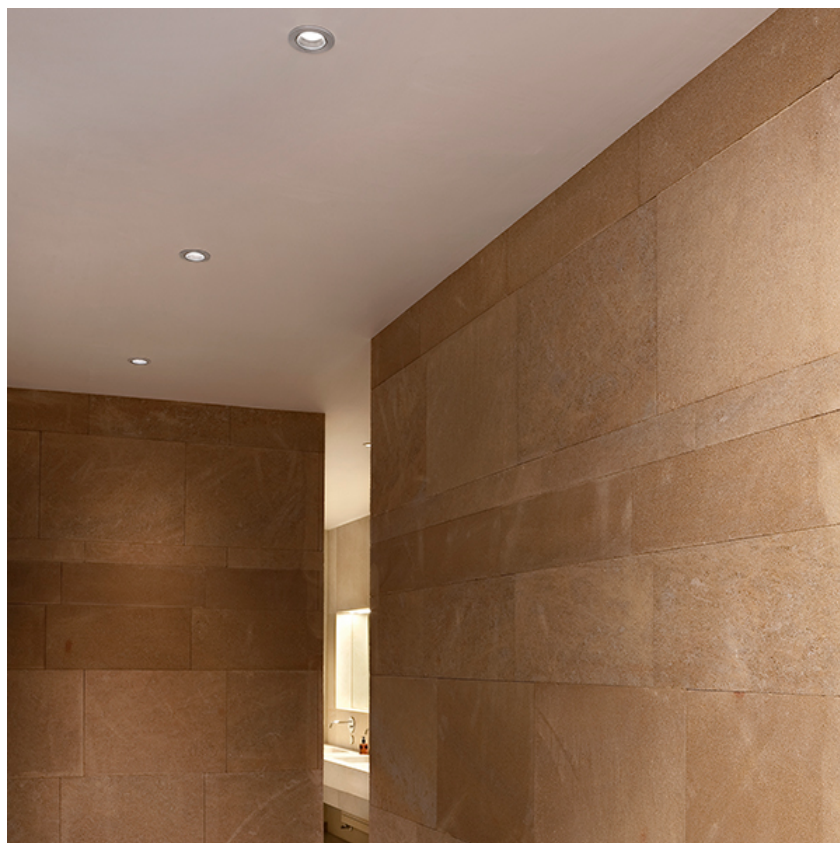

Compass IP65 Ø95 . Accessories


Optical



08.8041.68

Elliptical light distribution lens


Elliptical light distribution lens in 4mm thick tempered glass.



08.8042.64.OD

Colored filters


Colored filters in 3 mm dichroic material



08.8042.65.OD

Colored filters


Colored filters in 3 mm dichroic material



08.8042.66.OD

Colored filters

Colored filters in 3 mm dichroic material



08.8042.67.OD

Colored filters

Colored filters in 3 mm dichroic material



08.8042.98.OD

Colored filters

Colored filters in 3 mm dichroic material



08.8042.68

Colored filters


Colored filters in 3 mm dichroic material



08.8042.69

Colored filters

Colored filters in 3 mm dichroic material



08.8042.CL

Colored filters


Colored filters in 3 mm dichroic material




Compass IP65 Ø95
designed by FLOS Architectural

12V halogen lamp recessed downlight.
Remote transformer not included


03.3502.30	Matt white
03.3502.02	Grey
03.3502.14	Matt black

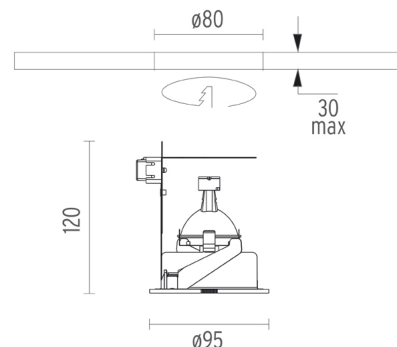

CERTIFICATIONS

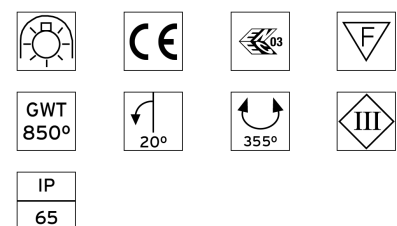

Compass IP65 Ø95 . Accessories



08.8042.DL

Colored filters

Colored filters in 3 mm dichroic material



08.8042.ND

Colored filters

Colored filters in 3 mm dichroic material



Compass IP65 Ø95
designed by FLOS Architectural

12V halogen lamp recessed downlight.
Remote transformer not included

03.3502.30	Matt white
03.3502.02	Grey
03.3502.14	Matt black


Structural



08.8040.00

Support

Stainless steel support, necessary
for mounting filters and lens

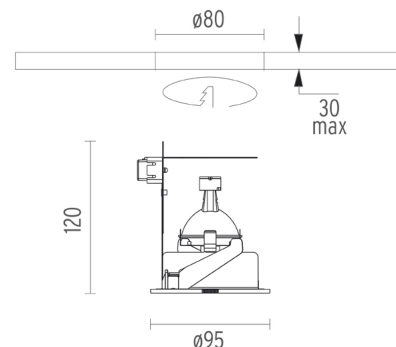

CERTIFICATIONS



Compass IP65 Ø95 . Lamps



60.6392

QR-CBC 5I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6392

Lamp type:
QR-CBC 5I



60.6359

QR-CBC 5I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6359

Lamp type:
QR-CBC 5I



60.6360

QR-CBC 5I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6360

Lamp type:
QR-CBC 5I



60.6361

QR-CBC 5I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6361

Lamp type:
QR-CBC 5I



60.6393

QR-CBC 5I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6393

Lamp type:
QR-CBC 5I



60.6394

QR-CBC 5I

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6394

Lamp type:
QR-CBC 5I




Compass IP65 Ø95

designed by FLOS Architectural

12V halogen lamp recessed downlight.
Remote transformer not included

03.3502.30	Matt white
03.3502.02	Grey
03.3502.14	Matt black

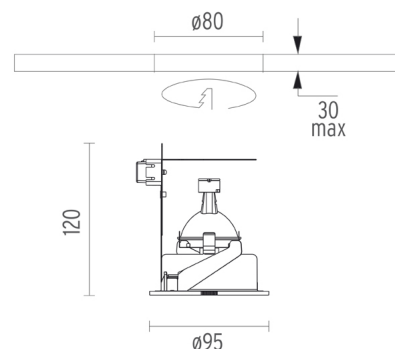

CERTIFICATIONS



Compass IP65 Ø95 . Lamps



60.6395

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6395

Lamp type:
QR-CBC 51



60.6355

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6355

Lamp type:
QR-CBC 51



60.6356

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
60.6356

Lamp type:
QR-CBC 51



60.6357

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
60.6357

Lamp type:
QR-CBC 51



BU19

QR-CBC 51

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU19

Lamp type:
QR-CBC 51



BU20

QR-CBC 51

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
38 °

Color temperature (K):
3000 °K

Catalog reference:
BU20


Lamp type:
QR-CBC 51



Compass IP65 Ø95
designed by FLOS Architectural

12V halogen lamp recessed downlight.
Remote transformer not included

03.3502.30	Matt white
03.3502.02	Grey
03.3502.14	Matt black

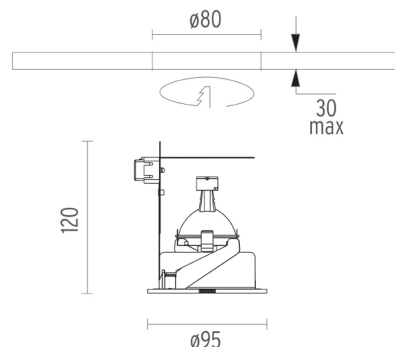

CERTIFICATIONS



Compass IP65 Ø95 . Lamps



BU2I

QR-CBC 5I

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
GX5.3

Lamp angle:
60 °

Color temperature (K):
3000 °K

Catalog reference:
BU2I

Lamp type:
QR-CBC 5I



60.6992

LED QR-CBC 5I

Lamp Watt:
6,5 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
36 °

Color temperature (K):
3000 °K

Catalog reference:
60.6992

Lamp type:
LED QR-CBC 5I



60.6990

LED QR-CBC 5I

Lamp Watt:
6,5 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6990


Lamp type:
LED QR-CBC 5I



Compass IP65 Ø95
designed by FLOS Architectural

12V halogen lamp recessed downlight.
Remote transformer not included

03.3502.30	Matt white
03.3502.02	Grey
03.3502.14	Matt black

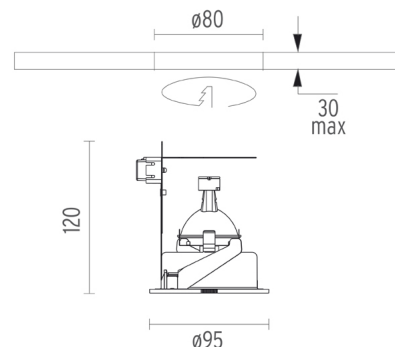

CERTIFICATIONS

