

## COMPASS FIXED Ø90

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Number of heads   | 1                                                    |
| Mounting          | Ceiling recessed                                     |
| Lamps description | QR-CBC 5I GX5.3 Max 50W or LED QR-CBC 5I GX5.3 7/10W |
| Bezel diameter    | 90                                                   |
| Voltage (V)       | 12                                                   |
| Environment       | Indoor                                               |

### OPTICAL

|                              |                              |
|------------------------------|------------------------------|
| Light controller description | Bare lamps                   |
| Aiming                       | Fixed                        |
| Light distribution symmetry  | Symmetric                    |
| Beam angle                   | 10°, 24°, 25°, 36°, 38°, 60° |

### ELECTRICAL

|                          |               |
|--------------------------|---------------|
| Transformer availability | Separate item |
| Transformer mounting     | Remote        |
| Emergency                | Without       |
| Insulation class         | Class III     |

### PHYSICAL


|                       |                   |
|-----------------------|-------------------|
| Cutout shape          | Round             |
| Diameter (mm)         | 90                |
| Recessed depth (mm)   | 120               |
| Construction material | Die-cast aluminum |
| Weight (kg)           | 0,26              |






**Compass Fixed Ø90**  
designed by FLOS Architectural

12V halogen lamp recessed downlight.  
Remote transformer not included

|            |            |
|------------|------------|
| 03.3507.30 | Matt white |
| 03.3507.02 | Grey       |
| 03.3507.14 | Matt black |

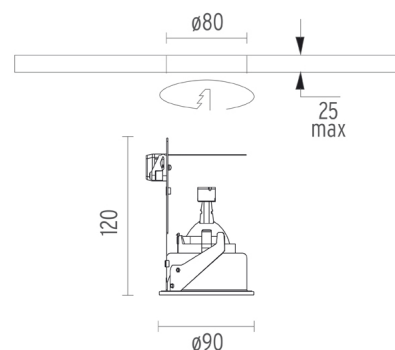

### CERTIFICATIONS

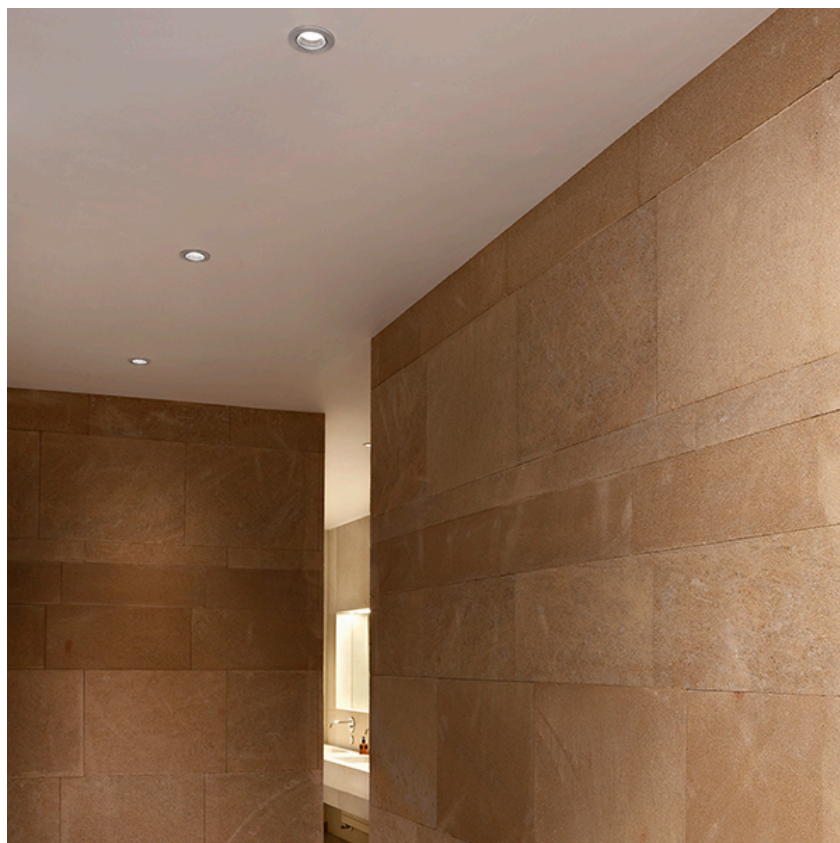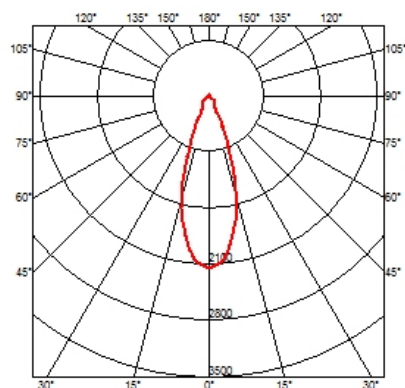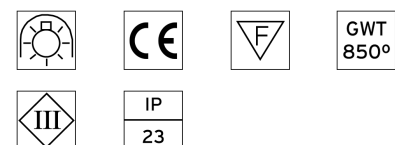

## Compass Fixed Ø90 . Accessories


### Optical



08.8041.68

#### Elliptical light distribution lens


Elliptical light distribution lens in 4mm thick tempered glass.



08.8042.64.OD

#### Colored filters

Colored filters in 3 mm dichroic material



08.8042.65.OD

#### Colored filters


Colored filters in 3 mm dichroic material



**Compass Fixed Ø90**  
designed by FLOS Architectural

12V halogen lamp recessed downlight.  
Remote transformer not included


|            |            |
|------------|------------|
| 03.3507.30 | Matt white |
| 03.3507.02 | Grey       |
| 03.3507.14 | Matt black |



08.8042.66.OD

#### Colored filters

Colored filters in 3 mm dichroic material



08.8042.67.OD

#### Colored filters


Colored filters in 3 mm dichroic material



08.8042.98.OD

#### Colored filters

Colored filters in 3 mm dichroic material

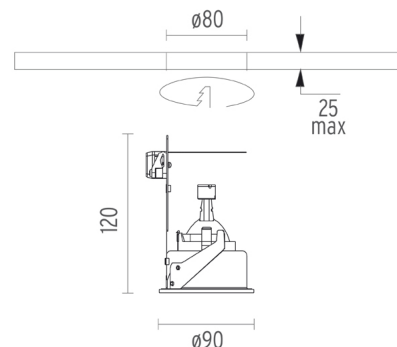

08.8042.68

#### Colored filters


Colored filters in 3 mm dichroic material



08.8042.69

#### Colored filters

Colored filters in 3 mm dichroic material





08.8042.CL


#### Colored filters

Colored filters in 3 mm dichroic material

### CERTIFICATIONS

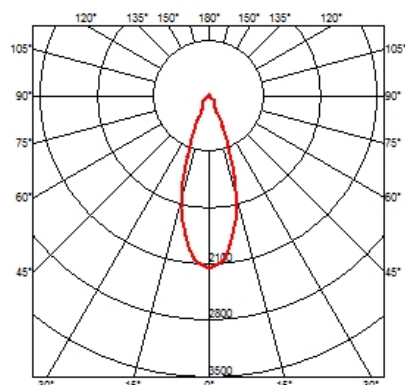

## Compass Fixed Ø90 . Accessories



08.8042.DL

### Colored filters

Colored filters in 3 mm dichroic material



08.8042.ND

### Colored filters

Colored filters in 3 mm dichroic material



**Compass Fixed Ø90**  
designed by FLOS Architectural

12V halogen lamp recessed downlight.  
Remote transformer not included

|            |            |
|------------|------------|
| 03.3507.30 | Matt white |
| 03.3507.02 | Grey       |
| 03.3507.14 | Matt black |


## Structural




08.8040.00

### Support

Stainless steel support. necessary  
for mounting filters and lens

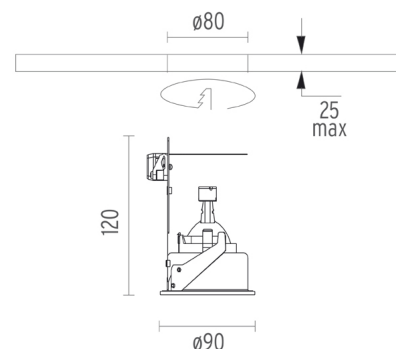

## CERTIFICATIONS

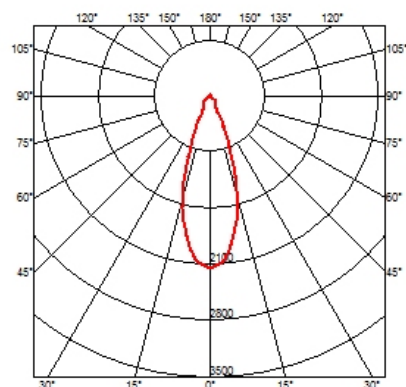

## Compass Fixed Ø90 . Lamps



60.6392

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
10 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6392

**Lamp type:**  
QR-CBC 51



60.6359

**QR-CBC 51**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6359

**Lamp type:**  
QR-CBC 51



60.6360

**QR-CBC 51**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6360

**Lamp type:**  
QR-CBC 51



60.6361

**QR-CBC 51**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6361

**Lamp type:**  
QR-CBC 51



60.6393

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6393

**Lamp type:**  
QR-CBC 51



60.6394

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6394


**Lamp type:**  
QR-CBC 51





**Compass Fixed Ø90**  
designed by FLOS Architectural

12V halogen lamp recessed downlight.  
Remote transformer not included

|            |            |
|------------|------------|
| 03.3507.30 | Matt white |
| 03.3507.02 | Grey       |
| 03.3507.14 | Matt black |

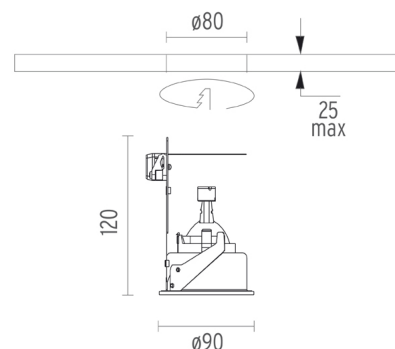

### CERTIFICATIONS

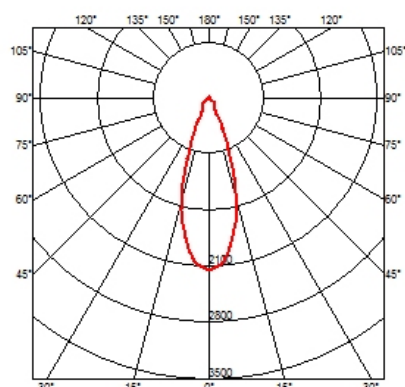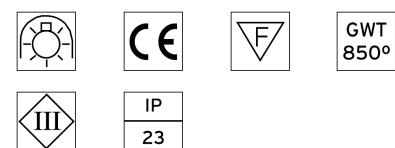

## Compass Fixed Ø90 . Lamps



60.6395

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6395

**Lamp type:**  
QR-CBC 51



60.6355

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
24 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6355

**Lamp type:**  
QR-CBC 51



60.6356

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6356

**Lamp type:**  
QR-CBC 51



60.6357

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
60 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6357

**Lamp type:**  
QR-CBC 51



BU19

**QR-CBC 51**

**Lamp Watt:**  
20 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU19

**Lamp type:**  
QR-CBC 51



BU20

**QR-CBC 51**

**Lamp Watt:**  
35 W

**Lamp category:**  
Halogen low voltage

**Socket:**  
GX5.3

**Lamp angle:**  
38 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
BU20


**Lamp type:**  
QR-CBC 51





**Compass Fixed Ø90**  
designed by FLOS Architectural

12V halogen lamp recessed downlight.  
Remote transformer not included

|            |            |
|------------|------------|
| 03.3507.30 | Matt white |
| 03.3507.02 | Grey       |
| 03.3507.14 | Matt black |

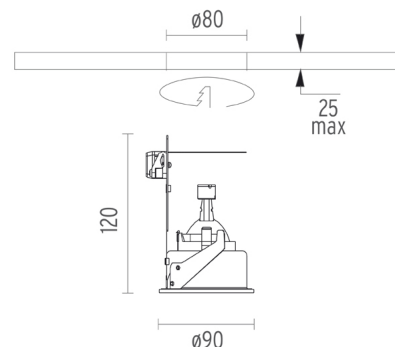

### CERTIFICATIONS

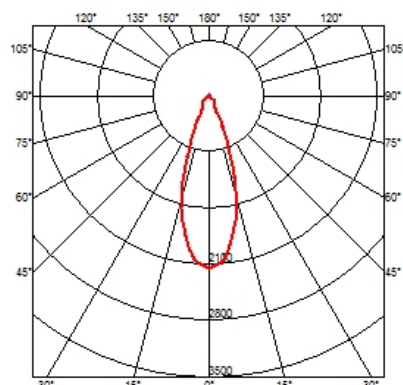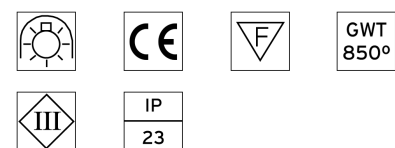

## Compass Fixed Ø90 . Lamps



BU2I

**QR-CBC 5I**

**Lamp Watt:**

50 W

**Lamp category:**

Halogen low voltage

**Socket:**

GX5.3

**Lamp angle:**

60 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

BU2I

**Lamp type:**

QR-CBC 5I



60.689I

**LED QR-CBC 5I**

**Lamp Watt:**

8 W

**Lamp category:**

LED

**Socket:**

GX5.3

**Lamp angle:**

24 °

**Color temperature (K):**

3000 °K

**Catalog reference:**

60.689I

**Lamp type:**

LED QR-CBC 5I




**Compass Fixed Ø90**

designed by FLOS Architectural

12V halogen lamp recessed downlight.  
Remote transformer not included

|            |            |
|------------|------------|
| 03.3507.30 | Matt white |
| 03.3507.02 | Grey       |
| 03.3507.14 | Matt black |

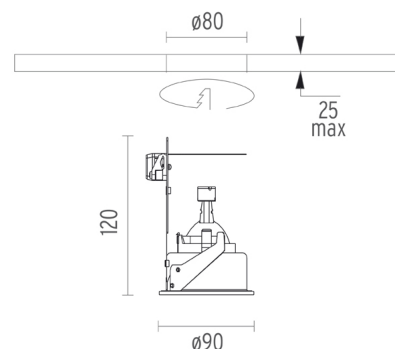

### CERTIFICATIONS

