

## EASY KAP Ø80 ADJUSTABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED PAR 16 GZ10 Max 8W
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Adjustable
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	10°, 25°, 36°, 40°, 60°

### ELECTRICAL

<b>Emergency</b>	Without
<b>Insulation class</b>	Class II






### PHYSICAL



<b>Cutout diameter (mm)</b>	75
<b>Diameter (mm)</b>	80
<b>Recessed depth (mm)</b>	155
<b>Construction material</b>	Die-cast aluminum
<b>Weight (kg)</b>	0,12




**Easy Kap Ø80 Adjustable**  
designed by FLOS Architectural

Recessed luminaire with main voltage source. Mounting frame not required.

	03.4162.GL	Gold
	03.4162.B1	White
	03.4162.BU	Blue
	03.4162.74	Black
	03.4162.CU	Copper

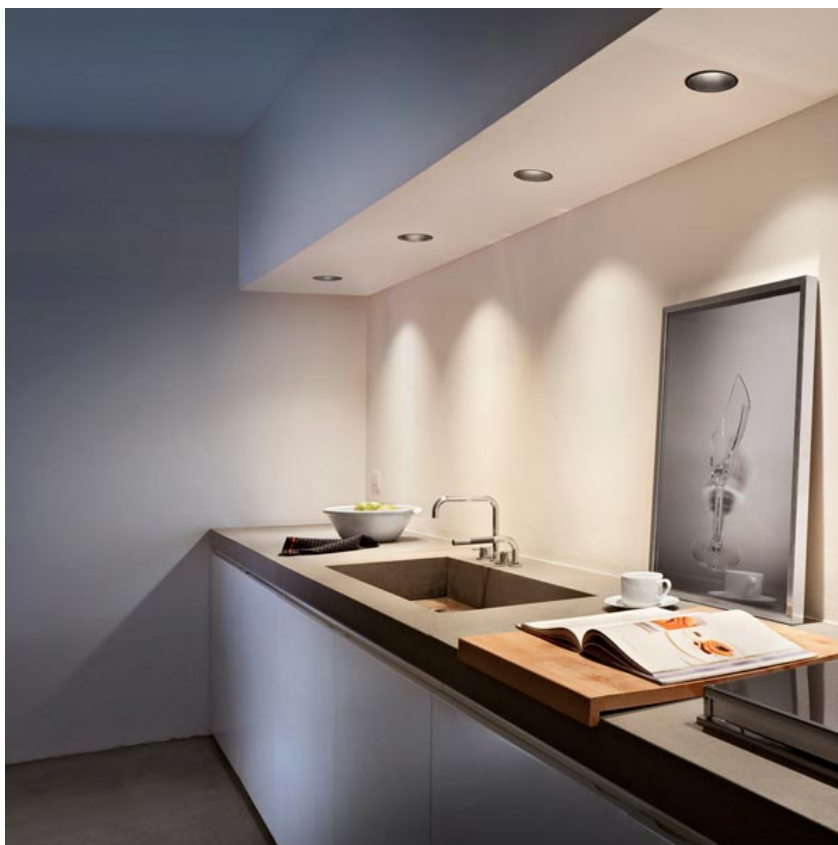

### CERTIFICATIONS

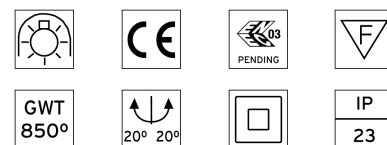

## Easy Kap Ø80 Adjustable . Lamps



60.6693

**LED PAR 16**

**Lamp Watt:**  
4 W

**Lamp category:**  
LED

**Socket:**  
GU10

**Lamp angle:**  
25 °

**Color temperature (K):**  
2700 °K

**Catalog reference:**  
60.6693

**Lamp type:**  
LED PAR 16



60.6694

**LED PAR 16**

**Lamp Watt:**  
4 W

**Lamp category:**  
LED

**Socket:**  
GU10

**Lamp angle:**  
40 °

**Color temperature (K):**  
2700 °K

**Catalog reference:**  
60.6694

**Lamp type:**  
LED PAR 16



60.6695

**LED PAR 16**

**Lamp Watt:**  
4 W

**Lamp category:**  
LED

**Socket:**  
GU10

**Lamp angle:**  
25 °

**Color temperature (K):**  
3000 °K






**Catalog reference:**  
60.6695

**Lamp type:**  
LED PAR 16



**Easy Kap Ø80 Adjustable**  
designed by FLOS Architectural

Recessed luminaire with main voltage source. Mounting frame not required.

	03.4162.GL	Gold
	03.4162.B1	White
	03.4162.BU	Blue
	03.4162.74	Black
	03.4162.CU	Copper



60.6968

**LED PAR 16**

**Lamp Watt:**  
5,4 W

**Lamp category:**  
LED


**Socket:**  
GU10

**Lamp angle:**  
40 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6968

**Lamp type:**  
LED PAR 16



### CERTIFICATIONS

