

KAP 80 SQUARE WALL-WASHER

Number of heads

Mounting Ceiling recessed

Lamps description LED Array DC 500 mA 9,2W 698 lm 2700K CRI 90

Luminaire luminous flux Extreme Cut-off. See reference number

Environment Indoo

Notes Diffusing lens included. Fast&Perfect pre-installation

frame to be ordered separately.

OPTICAL

Aiming Fixed
Light distribution symmetry Asymmetric
Beam angle 27°

ELECTRICAL

Transformer availability Separate item
Transformer mounting Remote

Transformer type Electronic, Electronic dimmable, Electronic dimmable

I-10V, Electronic dimmable dali


Emergency Without Insulation class III

PHYSICAL

Recessed depth (mm) 81

Construction material Die-cast aluminum

Weight (kg) 0,24

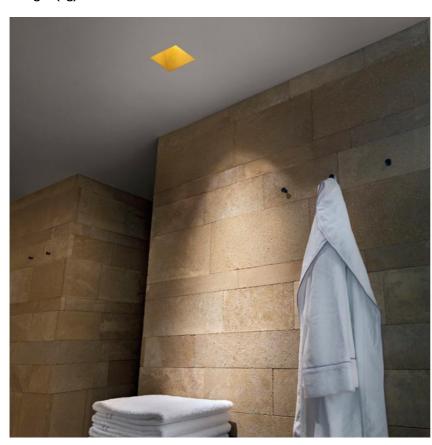




Kap 80 Square Wall-Washer designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4191.GL - 664lm Gold
03.4191.BI - 584lm White
03.4191.BU - 572lm Blue
03.4191.74 - 533lm Black
03.4191.CU - 589lm Copper



CERTIFICATIONS













Flos.architectural@flos.com www.flos.com



Kap 80 Square Wall-Washer. Accessories

Power Supply









designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

| 03.4191.GL - 664lm | Gold |
|--------------------|--------|
| 03.4191.BI - 584lm | White |
| 03.4191.BU - 572lm | Blue |
| 03.4191.74 - 533lm | Black |
| 03.4191.CU - 589lm | Copper |




Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15

Constant Current Power Supply for LED. 10-20W

60.8847

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum lenght of 1.5 mm2 secundary conductor (m): 10

Maximum lenght of 2.5 mm2 secundary conductor (m): 15



ø120 ////// ø153 30 max

91 74

60.8880

Constant Current Power Supply for LED. 6W-100/14W-240V Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA

Maximum lenght of 1.5 mm2 secundary conductor (m): 50

Maximum lenght of 2.5 mm2 secundary conductor (m): 50

CERTIFICATIONS













Flos.architectural@flos.com www.flos.com



Kap 80 Square Wall-Washer . Accessories

Mounting





08.9103.00

08.9101.00

Installation frame No Trim

Fast&Perfect tool ø153

Kap 80 Square Wall-Washer . Lamps



LED Array

Lamp category:

LED

Socket:

Special base


Lamp type: LED Array



Kap 80 Square Wall-Washer designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included.

03.4191.GL - 664lm Gold
03.4191.BI - 584lm White
03.4191.BU - 572lm Blue
03.4191.74 - 533lm Black
03.4191.CU - 589lm Copper



CERTIFICATIONS













Flos.architectural@flos.com www.flos.com