

## EASY KAP 80 SQUARE FIXED OPTIC MEDIUM

Number of heads	I
Mounting	Ceiling recessed
Lamps description	LED Array DC 500 mA 9,2W 698 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Diffusing lens included

### OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	25°

### ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
Emergency	Without
Insulation class	Class III

### PHYSICAL



Recessed depth (mm)	93
Construction material	Die-cast aluminum
Weight (kg)	0,24



Easy Kap 80 Square Fixed Optic Medium designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

03.4195.GL - 560lm	Gold
03.4195.BI - 575lm	White
03.4195.BU - 469lm	Blue
03.4195.74 - 523lm	Black
03.4195.CU - 597lm	Copper

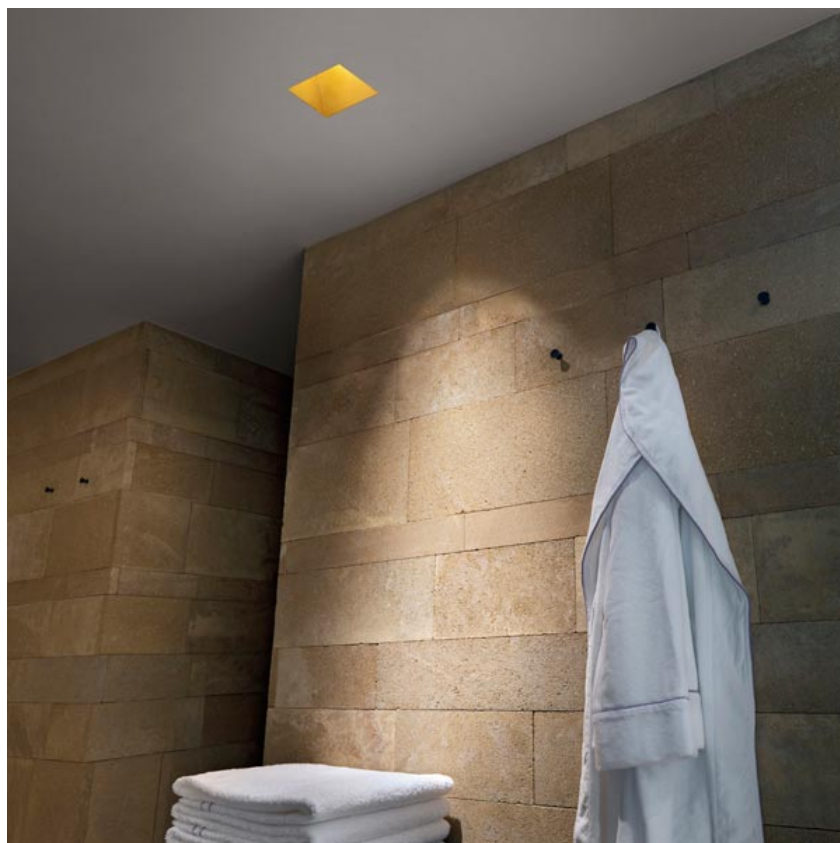

### CERTIFICATIONS



## Easy Kap 80 Square Fixed Optic Medium . Accessories

### Power Supply



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8847

#### Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15




60.8880

#### Constant Current Power Supply for LED. 6W-100/14W-240V

Continuous current power supply of 6W, 100V / 14W, 240V - 50/60Hz with 500 mA supply voltage.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 50


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50

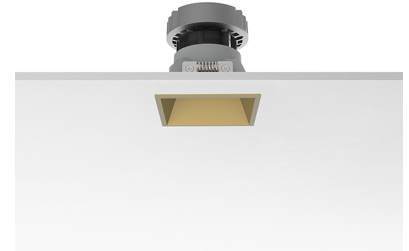

Easy Kap 80 Square Fixed Optic Medium  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

03.4195.GL - 560lm	Gold
03.4195.B1 - 575lm	White
03.4195.BU - 469lm	Blue
03.4195.74 - 523lm	Black
03.4195.CU - 597lm	Copper



### CERTIFICATIONS



## Easy Kap 80 Square Fixed Optic Medium . Lamps



### LED Array

### Lamp category:

LED

### Socket:

Special base






### Lamp type:


LED Array



**Easy Kap 80 Square Fixed Optic Medium**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

	03.4195.GL - 560lm	Gold
	03.4195.B1 - 575lm	White
	03.4195.BU - 469lm	Blue
	03.4195.74 - 523lm	Black
	03.4195.CU - 597lm	Copper



### CERTIFICATIONS

