

EASY KAP 80 SQUARE WALL-WASHER

Number of heads	1
Mounting	Ceiling recessed
Lamps description	PAR 16 GZ10 Max 50W or LED PAR 16 GZ10 Max 8W
Voltage (V)	220/240
Environment	Indoor

OPTICAL


Aiming	Fixed
Light distribution symmetry	Asymmetric
Beam angle	10°, 25°, 35°, 36°, 40°, 50°, 60°

ELECTRICAL

Emergency	Without
Insulation class	Class II

PHYSICAL



Recessed depth (mm)	140
Construction material	Die-cast aluminum
Weight (kg)	0,12

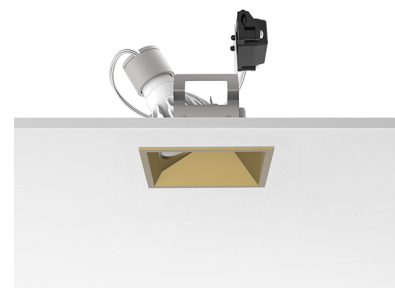



Easy Kap 80 Square Wall-Washer
designed by FLOS Architectural

Recessed luminaire with main voltage source. Mounting frame not required.

03.4219.GL	Gold
03.4219.BI	White
03.4219.BU	Blue
03.4219.74	Black
03.4219.CU	Copper

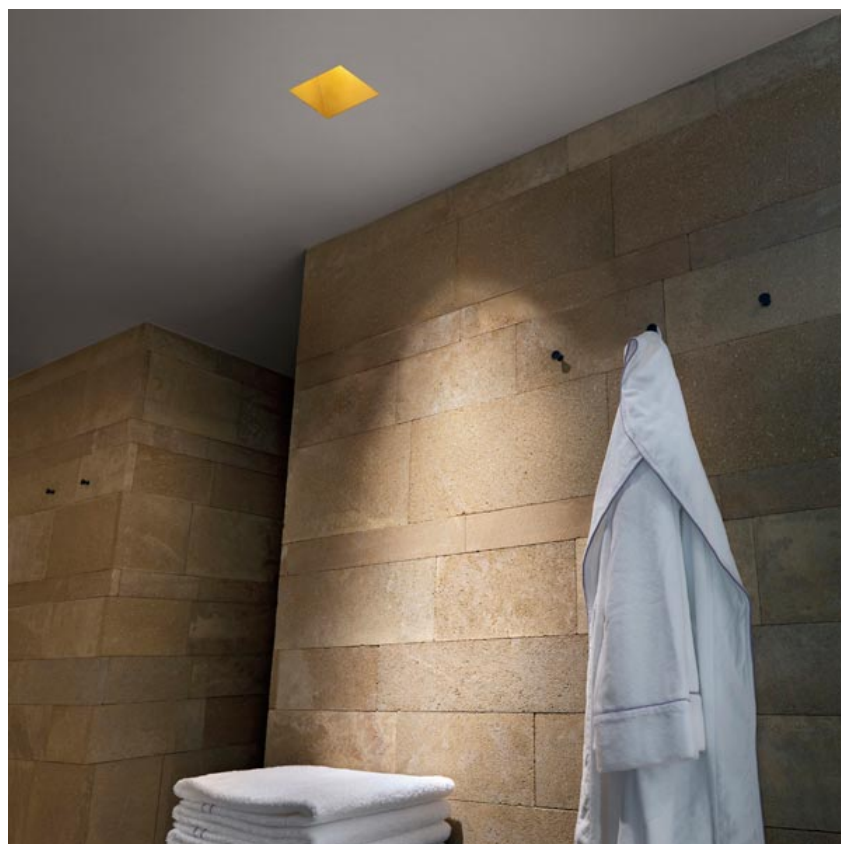

CERTIFICATIONS

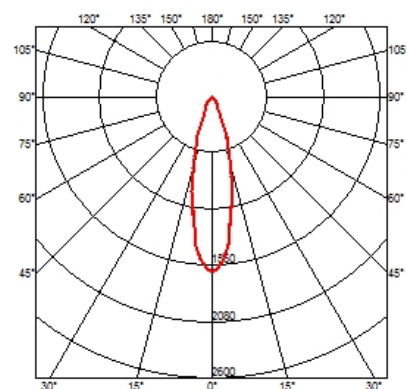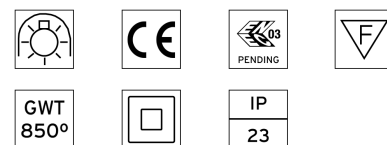

Easy Kap 80 Square Wall-Washer . Lamps



60.6365

PAR 16

Lamp Watt:
50 W

Lamp category:
Halogen mains

Socket:
GU10

Lamp angle:
35 °

Color temperature (K):
2900 °K

Catalog reference:
60.6365

Lamp type:
PAR 16



60.6396

PAR 16

Lamp Watt:
50 W

Lamp category:
Halogen mains

Socket:
GU10

Lamp angle:
50 °

Color temperature (K):
2900 °K

Catalog reference:
60.6396

Lamp type:
PAR 16



60.6693

LED PAR 16

Lamp Watt:
4 W

Lamp category:
LED

Socket:
GU10

Lamp angle:
25 °

Color temperature (K):
2700 °K

Catalog reference:
60.6693

Lamp type:
LED PAR 16



60.6694

LED PAR 16

Lamp Watt:
4 W

Lamp category:
LED

Socket:
GU10

Lamp angle:
40 °

Color temperature (K):
2700 °K

Catalog reference:
60.6694

Lamp type:
LED PAR 16



60.6695

LED PAR 16

Lamp Watt:
4 W

Lamp category:
LED

Socket:
GU10

Lamp angle:
25 °

Color temperature (K):
3000 °K

Catalog reference:
60.6695

Lamp type:
LED PAR 16



60.6968

LED PAR 16

Lamp Watt:
5,4 W

Lamp category:
LED


Socket:
GU10

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
60.6968


Lamp type:
LED PAR 16

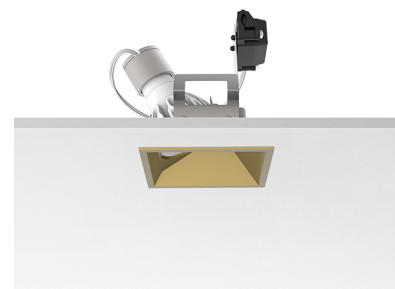

Easy Kap 80 Square Wall-Washer
designed by FLOS Architectural

Recessed luminaire with main voltage source. Mounting frame not required.

03.4219.GL	Gold
03.4219.BI	White
03.4219.BU	Blue
03.4219.74	Black
03.4219.CU	Copper



CERTIFICATIONS

