

## EASY KAP Ø80 WALL-WASHER

|                   |                                               |
|-------------------|-----------------------------------------------|
| Number of heads   | 1                                             |
| Mounting          | Ceiling recessed                              |
| Lamps description | PAR 16 GZ10 Max 50W or LED PAR 16 GZ10 Max 8W |
| Voltage (V)       | 220/240                                       |
| Environment       | Indoor                                        |

### OPTICAL

|                             |                                   |
|-----------------------------|-----------------------------------|
| Aiming                      | Fixed                             |
| Light distribution symmetry | Asymmetric                        |
| Beam angle                  | 10°, 25°, 35°, 36°, 40°, 50°, 60° |

### ELECTRICAL

|                  |          |
|------------------|----------|
| Emergency        | Without  |
| Insulation class | Class II |

### PHYSICAL



|                       |                   |
|-----------------------|-------------------|
| Cutout diameter (mm)  | 75                |
| Diameter (mm)         | 80                |
| Recessed depth (mm)   | 140               |
| Construction material | Die-cast aluminum |
| Weight (kg)           | 0,12              |





**Easy Kap Ø80 Wall-Washer**  
designed by FLOS Architectural

Recessed luminaire with main voltage source. Mounting frame not required.

|            |        |
|------------|--------|
| 03.4221.GL | Gold   |
| 03.4221.BI | White  |
| 03.4221.BU | Blue   |
| 03.4221.74 | Black  |
| 03.4221.CU | Copper |

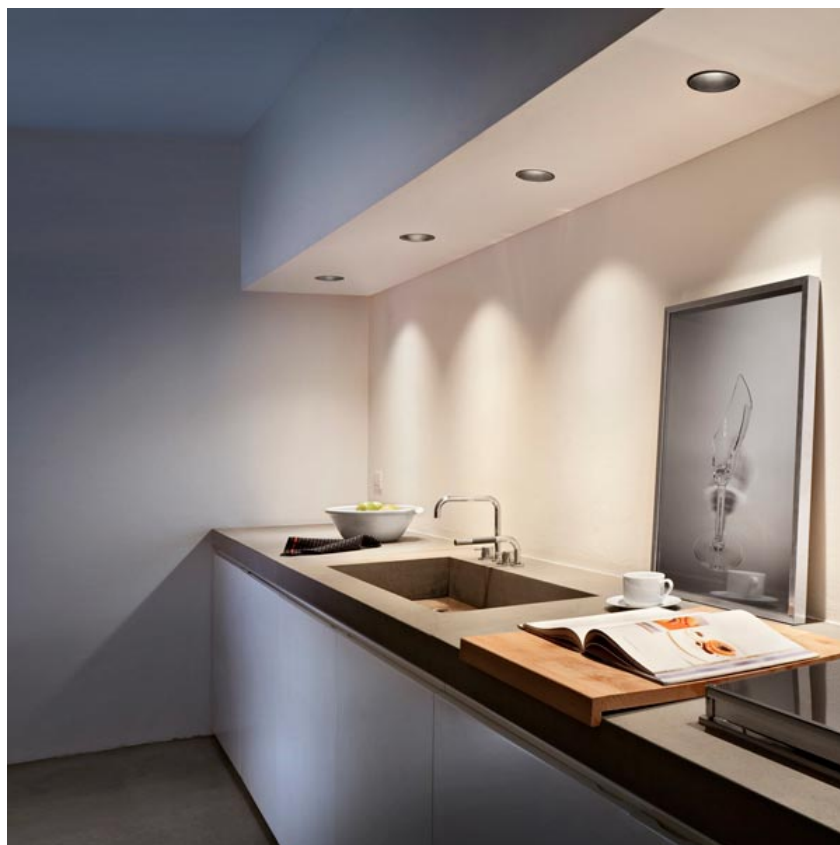

### CERTIFICATIONS

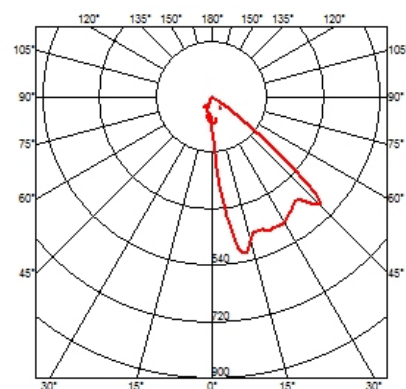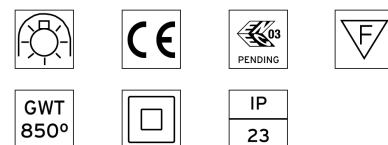

## Easy Kap Ø80 Wall-Washer . Lamps



60.6365

**PAR 16**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen mains

**Socket:**  
GU10

**Lamp angle:**  
35 °

**Color temperature (K):**  
2900 °K

**Catalog reference:**  
60.6365

**Lamp type:**  
PAR 16



60.6396

**PAR 16**

**Lamp Watt:**  
50 W

**Lamp category:**  
Halogen mains

**Socket:**  
GU10

**Lamp angle:**  
50 °

**Color temperature (K):**  
2900 °K

**Catalog reference:**  
60.6396

**Lamp type:**  
PAR 16



60.6693

**LED PAR 16**

**Lamp Watt:**  
4 W

**Lamp category:**  
LED

**Socket:**  
GU10

**Lamp angle:**  
25 °

**Color temperature (K):**  
2700 °K

**Catalog reference:**  
60.6693

**Lamp type:**  
LED PAR 16



**Easy Kap Ø80 Wall-Washer**  
designed by FLOS Architectural

Recessed luminaire with main voltage source. Mounting frame not required.

|            |        |
|------------|--------|
| 03.4221.GL | Gold   |
| 03.4221.BI | White  |
| 03.4221.BU | Blue   |
| 03.4221.74 | Black  |
| 03.4221.CU | Copper |



60.6694

**LED PAR 16**

**Lamp Watt:**  
4 W

**Lamp category:**  
LED

**Socket:**  
GU10

**Lamp angle:**  
40 °

**Color temperature (K):**  
2700 °K

**Catalog reference:**  
60.6694

**Lamp type:**  
LED PAR 16



60.6695

**LED PAR 16**

**Lamp Watt:**  
4 W

**Lamp category:**  
LED

**Socket:**  
GU10

**Lamp angle:**  
25 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6695

**Lamp type:**  
LED PAR 16



60.6968

**LED PAR 16**

**Lamp Watt:**  
5,4 W

**Lamp category:**  
LED


**Socket:**  
GU10

**Lamp angle:**  
40 °

**Color temperature (K):**  
3000 °K

**Catalog reference:**  
60.6968

**Lamp type:**  
LED PAR 16



## CERTIFICATIONS

