

KAP 80 SQUARE ADJUSTABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED PAR 16 GZ10 Max 8W
Voltage (V)	220/240
Environment	Indoor
Notes	Fast&Perfect pre-installation frame. To be ordered separately.

OPTICAL


Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 25°, 36°, 40°, 60°

ELECTRICAL

Emergency	Without
Insulation class	Class II

PHYSICAL


Recessed depth (mm)	155
Construction material	Die-cast aluminum
Weight (kg)	0,12

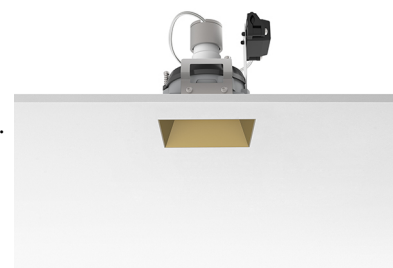


Kap 80 Square Adjustable
designed by FLOS Architectural

Recessed luminaire with main voltage source.

03.4235.GL	Gold
03.4235.BI	White
03.4235.BU	Blue
03.4235.74	Black
03.4235.CU	Copper

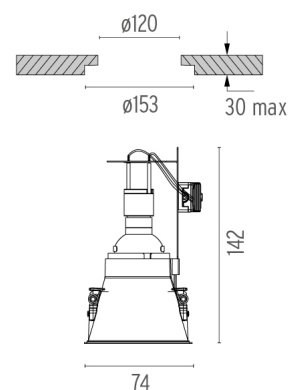

CERTIFICATIONS

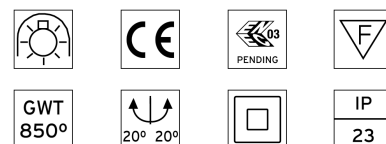

Kap 80 Square Adjustable . Accessories

Mounting




08.9103.00

Installation frame No Trim



08.9101.00

Fast&Perfect tool ø153

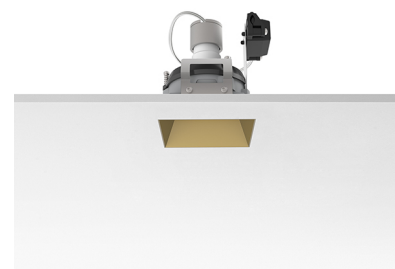

Kap 80 Square Adjustable
designed by FLOS Architectural

Recessed luminaire with main voltage source.

03.4235.GL	Gold
03.4235.BI	White
03.4235.BU	Blue
03.4235.74	Black
03.4235.CU	Copper

Kap 80 Square Adjustable . Lamps



60.6693

LED PAR 16

Lamp Watt:
4 W

Lamp category:
LED

Socket:
GU10

Lamp angle:
25 °

Color temperature (K):
2700 °K

Catalog reference:
60.6693

Lamp type:
LED PAR 16



60.6694

LED PAR 16

Lamp Watt:
4 W

Lamp category:
LED

Socket:
GU10

Lamp angle:
40 °

Color temperature (K):
2700 °K

Catalog reference:
60.6694

Lamp type:
LED PAR 16



60.6695

LED PAR 16

Lamp Watt:
4 W

Lamp category:
LED


Socket:
GU10

Lamp angle:
25 °

Color temperature (K):
3000 °K

Catalog reference:
60.6695

Lamp type:
LED PAR 16

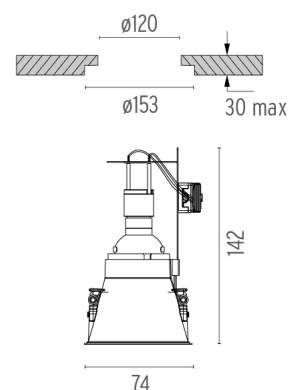

CERTIFICATIONS



Kap 80 Square Adjustable . Lamps



60.6968

LED PAR 16

Lamp Watt:

5,4 W

Lamp category:

LED

Socket:

GU10

Lamp angle:

40 °

Color temperature (K):


3000 °K

Catalog reference:

60.6968

Lamp type:


LED PAR 16

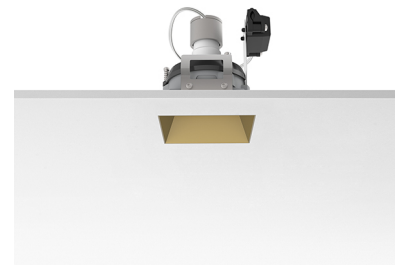

Kap 80 Square Adjustable
designed by FLOS Architectural

Recessed luminaire with main voltage source.

03.4235.GL	Gold
03.4235.BI	White
03.4235.BU	Blue
03.4235.74	Black
03.4235.CU	Copper

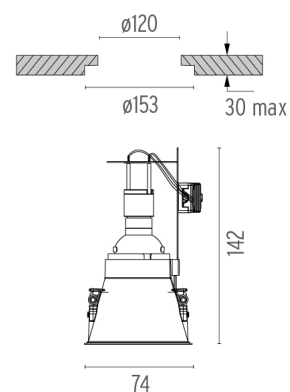

CERTIFICATIONS

