

KAP Ø80 ADJUSTABLE

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED QR-CBC 51 GX5.3 Max 8W
Voltage (V)	12
Environment	Indoor
Notes	Fast&Perfect pre-installation frame. To be ordered separately.

OPTICAL

Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	10°, 24°, 25°, 36°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class III

PHYSICAL


Diameter (mm)	74
Recessed depth (mm)	120
Construction material	Die-cast aluminum
Weight (kg)	0,12





Kap Ø80 Adjustable
designed by FLOS Architectural

Recessed 12V halogen lamp luminaire.
Remote transformer not included.

03.4236.GL	Gold
03.4236.B1	White
03.4236.BU	Blue
03.4236.74	Black
03.4236.CU	Copper



CERTIFICATIONS

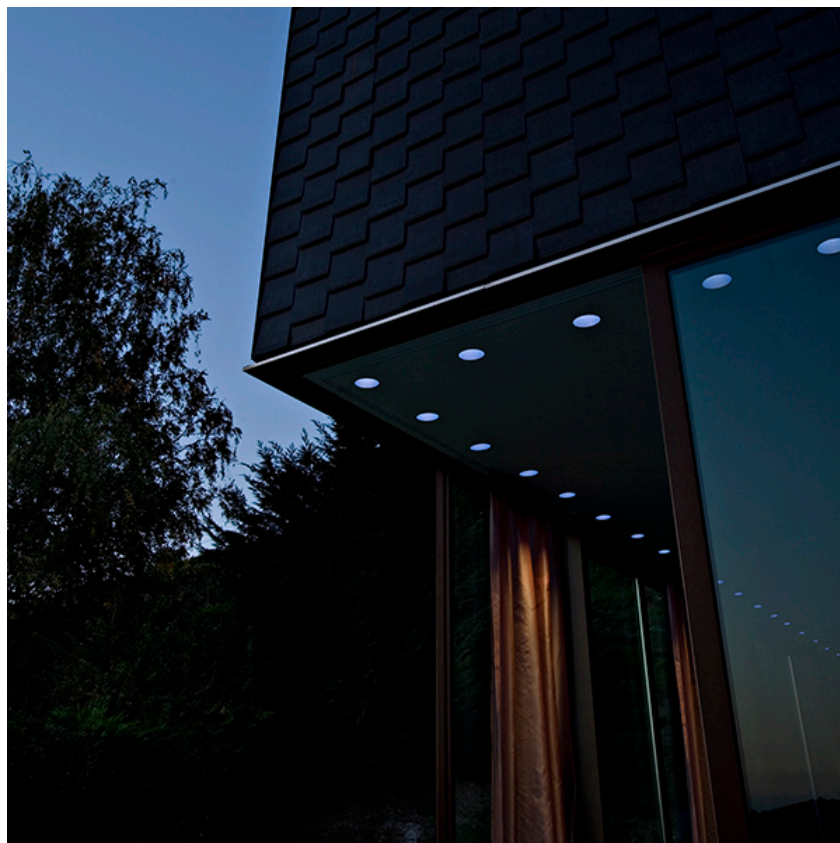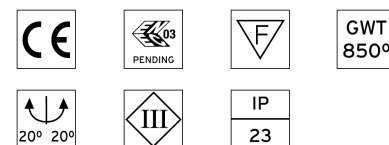

Kap Ø80 Adjustable . Accessories

Mounting



08.9102.00

Installation frame No Trim



08.9100.00

Fast&Perfect tool ø126



Kap Ø80 Adjustable
designed by FLOS Architectural

Recessed 12V halogen lamp luminaire.
Remote transformer not included.

03.4236.GL	Gold
03.4236.BI	White
03.4236.BU	Blue
03.4236.74	Black
03.4236.CU	Copper

Kap Ø80 Adjustable . Lamps



60.6891

LED QR-CBC 5 I

Lamp Watt:
8 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6891

Lamp type:
LED QR-CBC 5 I



60.6992

LED QR-CBC 5 I

Lamp Watt:
6,5 W

Lamp category:
LED

Socket:
GX5.3

Lamp angle:
36 °

Color temperature (K):
3000 °K

Catalog reference:
60.6992

Lamp type:
LED QR-CBC 5 I



60.6990

LED QR-CBC 5 I

Lamp Watt:
6,5 W

Lamp category:
LED


Socket:
GX5.3

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6990

Lamp type:
LED QR-CBC 5 I



CERTIFICATIONS

