

LIGHT SOLDIER FIXED Ø75

| | |
|--------------------------------|--|
| Number of heads | 1 |
| Mounting | Ceiling recessed |
| Lamps description | LED Array DC 500 mA 9,2W 893 lm 2700K CRI 90 |
| Luminaire luminous flux | See reference number |
| Environment | Indoor |

OPTICAL

| | |
|------------------------------------|------------|
| Aiming | Fixed |
| Light distribution symmetry | Symmetric |
| Beam angle | 26° Medium |

ELECTRICAL

| | |
|---------------------------------|--|
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Transformer type | Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali |
| Emergency | Without |
| Insulation class | Class III |

PHYSICAL




| | |
|------------------------------|-----------|
| Cutout diameter (mm) | 70 |
| Diameter (mm) | 75 |
| Recessed depth (mm) | 72 |
| Construction material | Aluminium |
| Weight (kg) | 0,15 |




Light Soldier Fixed Ø75
designed by FLOS Architectural

Embedded luminaire for LED light source. Power supply not included.

| | |
|-----------------------|-------|
| ● 03.4312.30A - 516lm | White |
| ● 03.4312.02A - 516lm | Grey |
| ● 03.4312.14A - 516lm | Black |

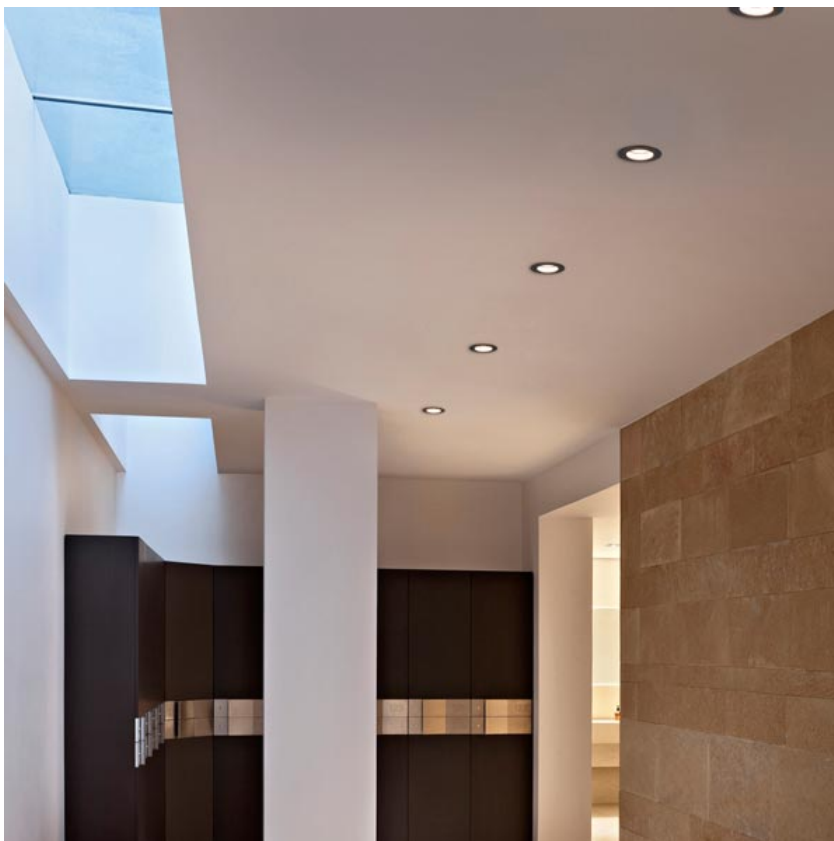

CERTIFICATIONS

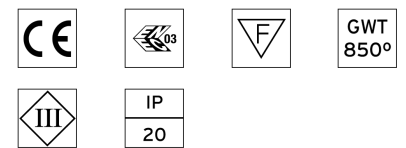

Light Soldier Fixed Ø75 . Accessories

Power Supply



60.8650

Constant Current Power Supply for LED. 20W / 500 mA

Non dimmable continuous current power supply 220/240V - 50/60Hz. (110V = 12W)

Maximum length of 1.5 mm² secondary conductor (m): 50

Maximum length of 2.5 mm² secondary conductor (m): 50



60.8534

Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8533

Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8485

Constant Current Power Supply for LED. 24W

Constant voltage supply source of 24W, 240V - 50/60Hz with adjustable Dali 500 mA supply voltage.

Maximum length of 1.5 mm² secondary conductor (m): 10

Maximum length of 2.5 mm² secondary conductor (m): 15



60.8697

Constant Current Power Supply for LED. 11/32W

Remote multicurrent electronic driver for LED. 11/32W, 250-1000 mA, 220/240V, 50/60Hz.

Maximum length of 1.5 mm² secondary conductor (m): 20

Maximum length of 2.5 mm² secondary conductor (m): 50



60.8847

Constant Current Power Supply for LED. 10-20W

Continuous current power supply of 10-20W, 110/240V - 50/60Hz with power current selected through adjustable 250/350/400/450/500/ 550/600/700 mA Dali switch. (Johnny 120 with accessories max 450 mA)

Maximum length of 1.5 mm² secondary conductor (m): 10



Maximum length of 2.5 mm² secondary conductor (m): 15



Light Soldier Fixed Ø75 designed by FLOS Architectural

Embedded luminaire for LED light source. Power supply not included.


- 03.4312.30A - 516lm White
- 03.4312.02A - 516lm Grey
- 03.4312.14A - 516lm Black



CERTIFICATIONS



Light Soldier Fixed Ø75 . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:




LED Array





Light Soldier Fixed Ø75

designed by FLOS Architectural

Embedded luminaire for LED light source. Power supply not included.

- | | | |
|---|---------------------|-------|
|  | 03.4312.30A - 516lm | White |
|  | 03.4312.02A - 516lm | Grey |
|  | 03.4312.14A - 516lm | Black |



CERTIFICATIONS

