

# FLOS

## KAP Ø105 DALI

|                                |  |
|--------------------------------|--|
| <b>Number of heads</b>         | 1  |
| <b>Mounting</b>                | Ceiling recessed   |
| <b>Lamps description</b>       | Phosphor LED 15,6W 1300 lm 3000K CRI 98  |
| <b>Luminaire luminous flux</b> | Extreme Cut-off. See reference number  |
| <b>Environment</b>             | Indoor   |
| <b>Notes</b>                   | Conventional pre-installation frame and/or Fast&Perfect. To be ordered separately. |

### OPTICAL

|                                     |           |
|-------------------------------------|-----------|
| <b>Light controller description</b> | Reflector |
| <b>Aiming</b>                       | Fixed     |
| <b>Light distribution symmetry</b>  | Symmetric |
| <b>Beam angle</b>                   | 37°       |

### ELECTRICAL

|                                 |                          |
|---------------------------------|--------------------------|
| <b>Transformer availability</b> | Included                 |
| <b>Transformer mounting</b>     | Remote                   |
| <b>Transformer type</b>         | Electronic dimmable dali |
| <b>Emergency</b>                | Without                  |
| <b>Insulation class</b>         | Class II                 |

### PHYSICAL


|                              |                   |
|------------------------------|-------------------|
| <b>Cutout diameter (mm)</b>  | 130               |
| <b>Diameter (mm)</b>         | 105               |
| <b>Recessed depth (mm)</b>   | 195               |
| <b>Construction material</b> | Die-cast aluminum |
| <b>Weight (kg)</b>           | 0,83              |




**Kap Ø105 Dali**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4407.B1CDA - 621lm White
- 03.4407.GLCDA - 631lm Gold
- 03.4407.BUCDA - 341lm Blue
- 03.4407.74CDA - 383lm Black
- 03.4407.CUCDA - 730lm Copper

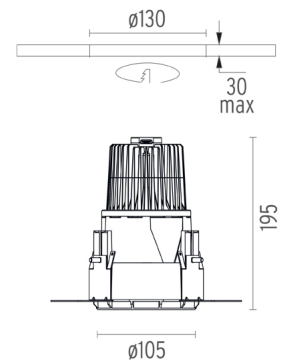


### CERTIFICATIONS

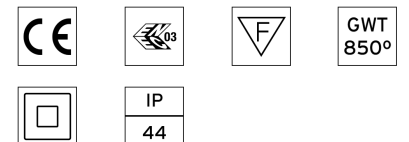

## Kap Ø105 Dali . Accessories

### Mounting

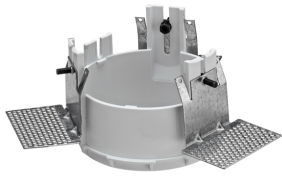

○ 08.8155.00


**Installation frame No Trim**

TO BE COMPLETED WITH:  
INSTALLATION FRAME.  
AVAILABLE AS ACCESSORY ELEMENT.  
MUST BE ORDERED SEPARATELY.

Ø105  
□ 08.8155.00



Example  
03.4400.B1 + 08.8155.00



**HOW TO ORDER**



○ 08.8420.00

**Installation can for concrete KAP ø105**



**Kap Ø105 Dali**  
designed by FLOS Architectural


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4407.B1CDA - 621lm White
- 03.4407.GLCDA - 631lm Gold
- 03.4407.BUCDA - 341lm Blue
- 03.4407.74CDA - 383lm Black
- 03.4407.CUCDA - 730lm Copper





○ 08.9101.00

**Fast&Perfect tool ø153**



● 08.9104.00

**Installation frame No Trim**

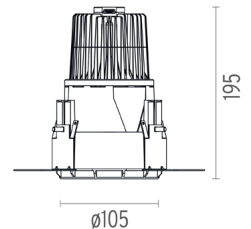

### CERTIFICATIONS



## Kap Ø105 Dali . Lamps



### Phosphor LED

Lamp category:  
LED

Lamp type:  
Phosphor LED




### Kap Ø105 Dali

designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4407.BICDA - 621lm White
- 03.4407.GLCDA - 631lm Gold
- 03.4407.BUCDA - 341lm Blue
- 03.4407.74CDA - 383lm Black
- 03.4407.CUCDA - 730lm Copper

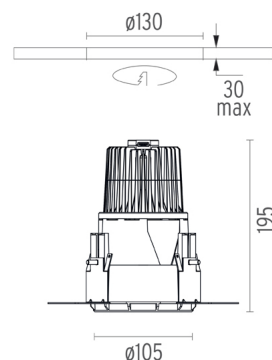

### CERTIFICATIONS

