

## KAP Ø145 I-10V

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	Phosphor LED 17W 1400 lm 3000K CRI 98
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor
<b>Notes</b>	Pre-installation frame. To be ordered separately.

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	53°

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic dimmable I-10V
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II

### PHYSICAL


<b>Cutout diameter (mm)</b>	165
<b>Diameter (mm)</b>	145
<b>Recessed depth (mm)</b>	195
<b>Construction material</b>	Die-cast aluminum
<b>Weight (kg)</b>	0,88





**Kap Ø145 I-10V**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4420.BICIV - 803lm White
- 03.4420.GLCIV - 796lm Gold
- 03.4420.BUCIV - 563lm Blue
- 03.4420.74CIV - 580lm Black
- 03.4420.CUCIV - 796lm Copper

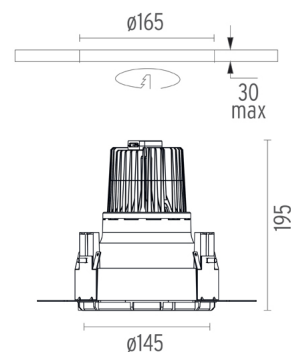


### CERTIFICATIONS

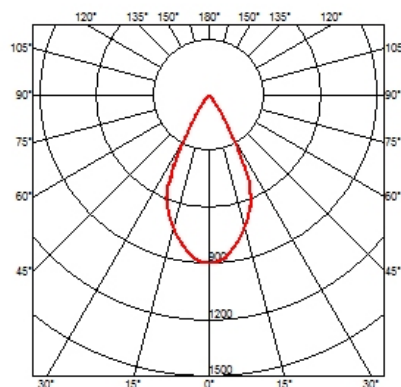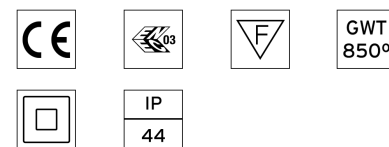

# FLOS

## Kap Ø145 I-10V . Accessories

### Mounting

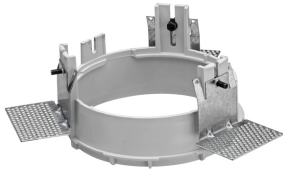

○ 08.8156.00

**Installation Frame No Trim**



○ 08.8421.00

**Installation can for concrete KAP Ø145**



○ 08.8491.30


● 08.8491.GL

● 08.8491.BU

● 08.8491.14

### Installation Frame Trim

Installation frame Kap Ø145/ Kap Ø145 wall washer. Copper finish trim frame not available. Combine with white or any of the other finishes according to the desired final aesthetic effect.

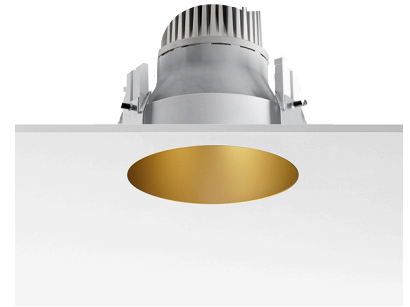

**Kap Ø145 I-10V**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4420.BICIV - 803lm White
- 03.4420.GLCIV - 796lm Gold
- 03.4420.BUCIV - 563lm Blue
- 03.4420.74CIV - 580lm Black
- 03.4420.CUCIV - 796lm Copper

## Kap Ø145 I-10V . Lamps




**Phosphor LED**

**Lamp category:**

LED

**Lamp type:**

Phosphor LED

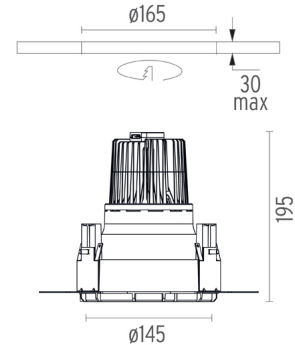

### CERTIFICATIONS

