

EASY KAP Ø105 FIXED

Number of heads	1
Mounting	Ceiling recessed
Lamps description	HI PAR 5I GX10 Max 35W
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric

ELECTRICAL

Control gear availability	Separate item
Control gear type	Electronic
Control gear mounting	Remote
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	102
Diameter (mm)	105
Recessed depth (mm)	187
Construction material	Die-cast aluminum
Weight (kg)	0,37






Easy Kap Ø105 Fixed
designed by FLOS Architectural

Recessed metal halide lamp luminaire.
Remote control gear not included.
Installation frame not necessary.

03.4451.GLA (41°)	Gold
03.4451.BIA (40°)	White
03.4451.BUA (40°)	Blue
03.4451.74A (41°)	Black
03.4451.CUA	Copper

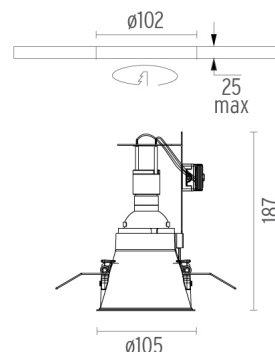

CERTIFICATIONS

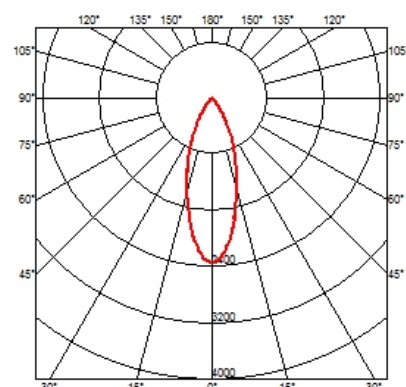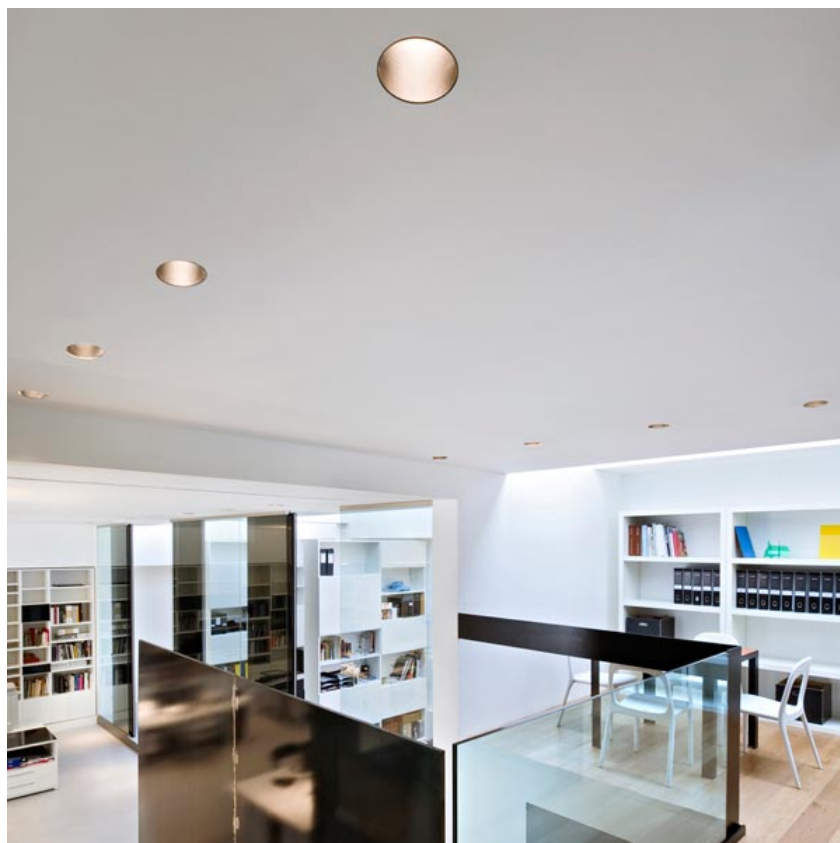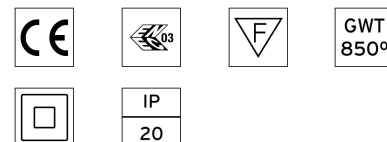

Easy Kap Ø105 Fixed . Lamps



60.6576

HI PAR 51

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6576

Lamp type:
HI PAR 51



60.6577

HI PAR 51

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
25 °

Color temperature (K):
3000 °K

Catalog reference:
60.6577

Lamp type:
HI PAR 51



60.6578

HI PAR 51

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
60.6578

Lamp type:
HI PAR 51



60.6637

HI PAR 51

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
25 °

Color temperature (K):
3000 °K

Catalog reference:
60.6637

Lamp type:
HI PAR 51



60.6638

HI PAR 51

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
60.6638

Lamp type:
HI PAR 51



60.6636

HI PAR 51

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
GX10

Lamp angle:
10 °

Color temperature (K):
3000 °K

Catalog reference:
60.6636


Lamp type:
HI PAR 51



Easy Kap Ø105 Fixed
designed by FLOS Architectural

Recessed metal halide lamp luminaire.
Remote control gear not included.
Installation frame not necessary.

03.4451.GLA (41°)	Gold
03.4451.B1A (40°)	White
03.4451.BUA (40°)	Blue
03.4451.74A (41°)	Black
03.4451.CUA	Copper

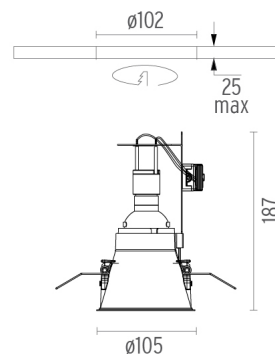

CERTIFICATIONS

