

KAP Ø145 DEEP

Number of heads	1
Mounting	Ceiling recessed
Lamps description	CDM-TC G8.5 Max 70W
Voltage (V)	220/240
Environment	Indoor
Notes	Pre-installation frame. To be ordered separately.

OPTICAL


Light controller description	Glass diffuser
Reflector finish	Aluminum
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	39°, 48°, 49°

ELECTRICAL

Control gear availability	Separate item
Control gear type	Electronic
Control gear mounting	Remote
Emergency	Without
Insulation class	Class I

PHYSICAL


Cutout diameter (mm)	165
Diameter (mm)	145
Recessed depth (mm)	200
Construction material	Die-cast aluminum
Weight (kg)	0,80

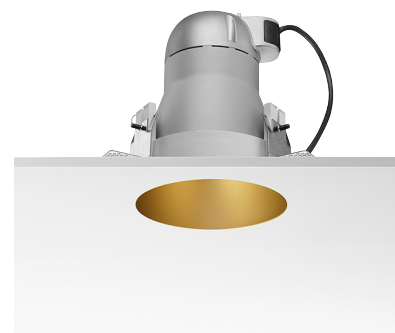



Kap Ø145 Deep
designed by FLOS Architectural

Recessed metal halide lamp luminaire.
Remote control gear not included.

03.4480.GL (39°)	Gold
03.4480.BI (48°)	White
03.4480.BU (49°)	Blue
03.4480.74 (48°)	Black
03.4480.CU	Copper

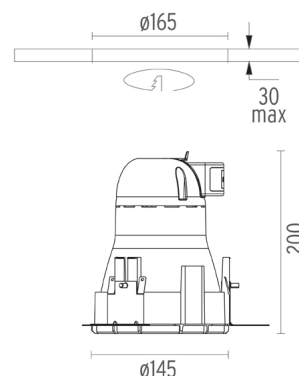


CERTIFICATIONS

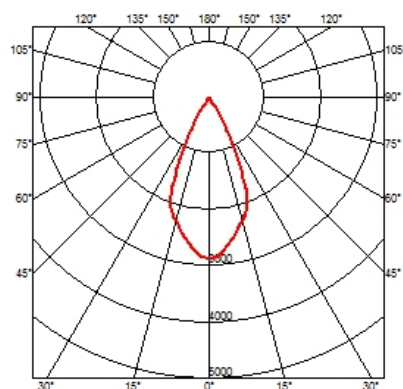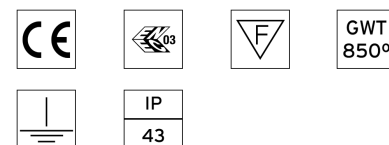

Kap Ø145 Deep . Accessories

Mounting



08.8156.00

Installation Frame No Trim



08.8421.00

Installation can for concrete KAP Ø145



08.8491.30


08.8491.GL

08.8491.BU

08.8491.14

Installation Frame Trim



Installation frame Kap Ø145/ Kap Ø145 wall washer. Copper finish trim frame not available. Combine with white or any of the other finishes according to the desired final aesthetic effect.

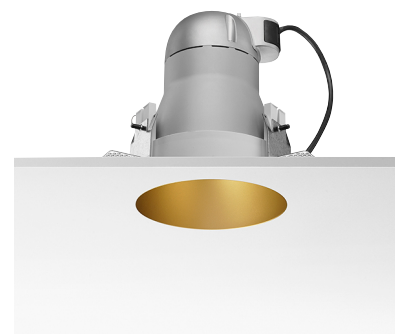

Kap Ø145 Deep
designed by FLOS Architectural

Recessed metal halide lamp luminaire. Remote control gear not included.

03.4480.GL (39°)	Gold
03.4480.BI (48°)	White
03.4480.BU (49°)	Blue
03.4480.74 (48°)	Black
03.4480.CU	Copper



Kap Ø145 Deep . Lamps



60.6483

CDM-TC

Lamp Watt:
35 W

Lamp category:
Metal halide

Socket:
G8.5

Color temperature (K):
3000 °K

Catalog reference:
60.6483

Lamp type:
CDM-TC



60.6484

CDM-TC

Lamp Watt:
70 W

Lamp category:
Metal halide

Socket:
G8.5

Color temperature (K):
3000 °K

Catalog reference:
60.6484

Lamp type:
CDM-TC



60.6127

CDM-TC

Lamp Watt:
20 W

Lamp category:
Metal halide

Socket:
G8.5

Color temperature (K):
3000 °K

Catalog reference:
60.6127

Lamp type:
CDM-TC

CERTIFICATIONS

