

## EASY KAP Ø105 WALL-WASHER

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling recessed
<b>Lamps description</b>	LED Array DC 500 mA 9,2W 698 lm 2700K CRI 90
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Environment</b>	Indoor

### OPTICAL

<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Asymmetric
<b>Beam angle</b>	50°

### ELECTRICAL

<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Transformer type</b>	Electronic, Electronic dimmable, Electronic dimmable I-10V, Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class II





### PHYSICAL



<b>Cutout diameter (mm)</b>	102
<b>Diameter (mm)</b>	105
<b>Recessed depth (mm)</b>	135
<b>Construction material</b>	Die-cast aluminum
<b>Weight (kg)</b>	0,50



**Easy Kap Ø105 Wall-Washer**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

	03.4493.GLB - 433lm	Gold
	03.4493.B1B - 368lm	White
	03.4493.BUB - 360lm	Blue
	03.4493.74B - 357lm	Black
	03.4493.CUB - 416lm	Copper

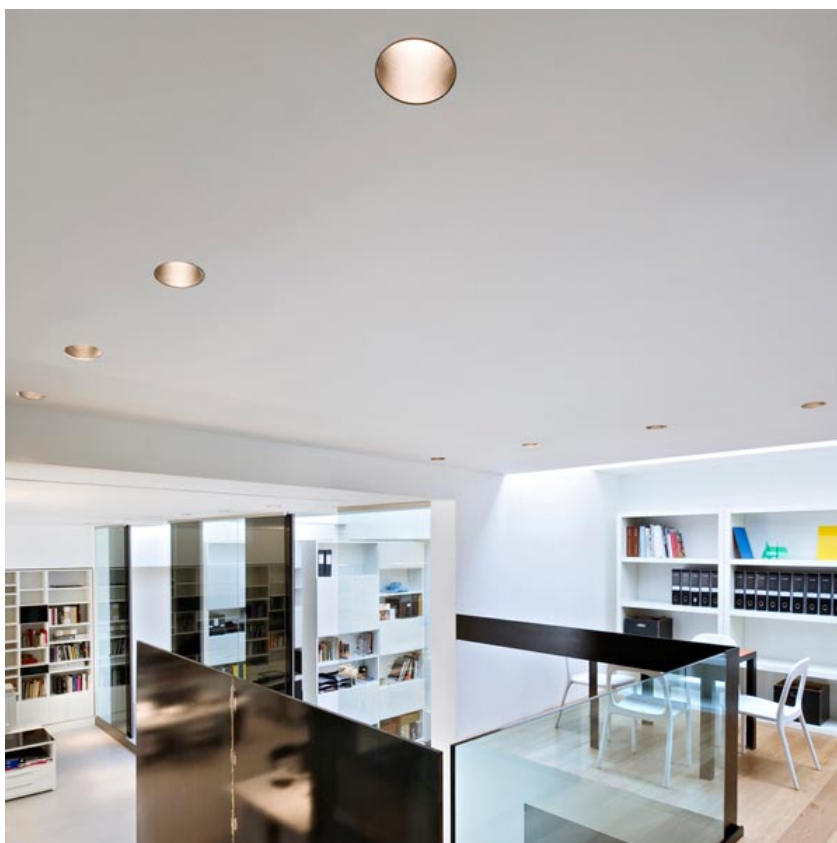

### CERTIFICATIONS



## Easy Kap Ø105 Wall-Washer . Accessories

### Power Supply



60.8650

#### Constant Current Power Supply for LED. 20W / 500 mA

Non dimmable continuous current power supply 220/240V - 50/60Hz. (110V = 12W)

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 50

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 50



60.8534

#### Constant Current Power Supply for LED. 32W

Continuous current power supply of 32W, 230/240V - 50/60Hz with power current selected through adjustable 350/500/700 mA switch by trailing and leading edge dimming or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8533

#### Constant Current Power Supply for LED. 25W

Continuous current power supply of 25W, 120-240V - 50/60Hz with power current selected through adjustable 350/500/700mA 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10

Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



60.8530

#### Constant Current Power Supply for LED. 25-50W

Continuous current power supply of 25-50W, 220/240V - 50/60Hz with power current selected through adjustable 350/500/550/650/700/750/850/900/1050mA Dali switch, 1-10V switch or push dimming.

Maximum length of 1.5 mm<sup>2</sup> secondary conductor (m): 10


Maximum length of 2.5 mm<sup>2</sup> secondary conductor (m): 15



#### Easy Kap Ø105 Wall-Washer designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

03.4493.GLB - 433lm	Gold
03.4493.B1B - 368lm	White
03.4493.BUB - 360lm	Blue
03.4493.74B - 357lm	Black
03.4493.CUB - 416lm	Copper



#### CERTIFICATIONS



## Easy Kap Ø105 Wall-Washer . Lamps



**LED Array**

**Lamp category:**

LED

**Socket:**

Special base

**Lamp type:**


LED Array



**Easy Kap Ø105 Wall-Washer**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Power supply not included. Installation frame not necessary.

- 03.4493.GLB - 433lm    Gold
- 03.4493.B1B - 368lm    White
- 03.4493.BUB - 360lm    Blue
- 03.4493.74B - 357lm    Black
- 03.4493.CUB - 416lm    Copper

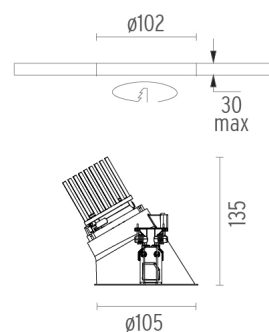

**CERTIFICATIONS**

