FLOS

KAP Ø145 DALI

Number of heads

Mounting Ceiling recessed

Lamps descriptionPhosphor LED 17W 1400 Im 2700K CRI 98Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes Pre-installation frame. To be ordered separately.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 53°

ELECTRICAL

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

PHYSICAL


Cutout diameter (mm) 165

Diameter (mm) 145

Recessed depth (mm) 195

Construction material Die-cast aluminum

Weight (kg) 0,88

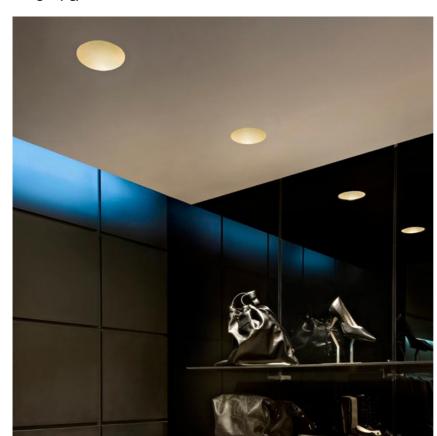



Kap Ø145 Dali designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.


03.4496.BIBDA - 775Im White

03.4496.GLBDA - 760Im Gold

03.4496.BUBDA - 550Im Blue

03.4496.74BDA - 541Im Black

03.4496.CUBDA - 796Im Copper



CERTIFICATIONS


















Kap Ø145 Dali . Accessories

Mounting











Kap Ø145 Dali designed by FLOS Architectural

08.8156.00 **Installation Frame No**

Trim

Installation can for concrete KAP ø145

08.8421.00

08.8491.30

08.8491.GL

08.8491.BU

08.8491.14

Installation Frame Trim


Installation frame Kap Ø145/ Kap Ø145 wall washer. Copper finish trim frame not available. Combine with withe or any of the other finishes according to the desired final aesthetic effect.

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

03.4496.BIBDA - 775lm White 03.4496.GLBDA - 760lm Gold

03.4496.BUBDA - 550lm Blue 03.4496.74BDA - 541Im Black

03.4496.CUBDA - 796lm Copper



Kap Ø145 Dali . Lamps



Phosphor LED Lamp category: LED

Lamp type: Phosphor LED

CERTIFICATIONS













