

## KAP SURFACE CEILING Ø100

Number of heads	1
Mounting	Ceiling surface
Lamps description	Power LED 9W 850 lm 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor

### OPTICAL


Reflector finish	White
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	33°

### ELECTRICAL

Number of ballast	1
Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

### PHYSICAL


Diameter (mm)	100
Height (mm)	235
Construction material	Extruded aluminum
Weight (kg)	0,85

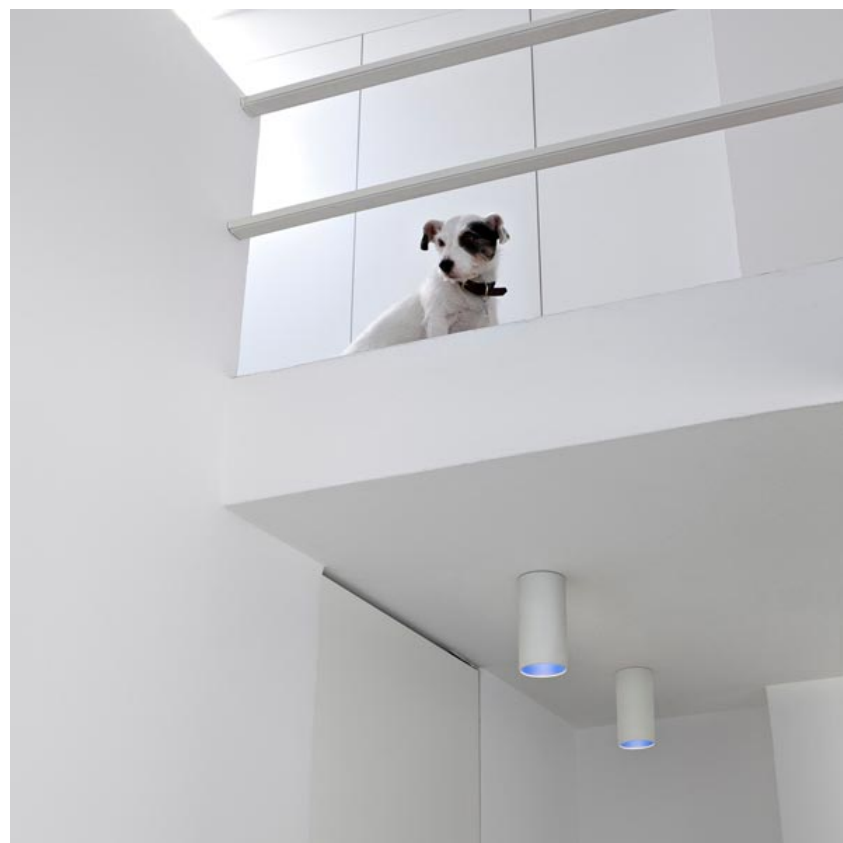

### Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with LED light source. non-regulable 220-240V, 50-60hz power supply integrated in luminaire body.

	03.4520.11A - 378lm	White / White
	03.4520.ASA - 378lm	Brushed Aluminium / White
	03.4520.ANA - 378lm	Black / White
	03.4520.B3A - 378lm	Brown / White



### CERTIFICATIONS



## Kap Surface Ceiling Ø100 . Lamps



### Power LED

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



### Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with LED light source. non-regulable 220-240V, 50-60hz power supply integrated in luminaire body.

	03.4520.IIA - 378lm	White / White
	03.4520.ASA - 378lm	Brushed Aluminium / White
	03.4520.ANA - 378lm	Black / White
	03.4520.B3A - 378lm	Brown / White



### CERTIFICATIONS

