

KAP SURFACE CEILING Ø100

Number of heads

Mounting Ceiling surface

Lamps descriptionPower LED 9W 850 Im 3000K CRI 80Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor



Reflector finishGoldAimingFixedLight distribution symmetrySymmetricBeam angle33°

ELECTRICAL


Number of ballastITransformer availabilityIncludedTransformer mountingIntegralTransformer typeElectronicEmergencyWithoutInsulation classClass I

PHYSICAL

Diameter (mm) 100 Height (mm) 235

Construction material Extruded aluminum

Weight (kg) 0,85

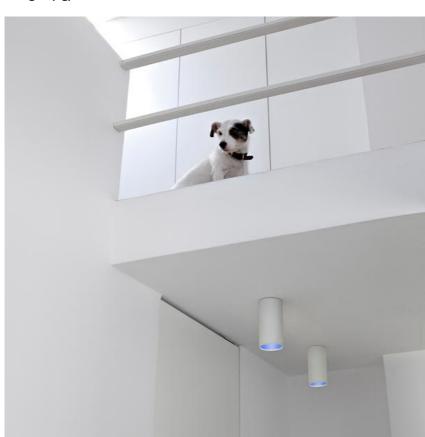



Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with led light source. non-regulable 220-240V, 50-60hz power supply integrated in luminaire body.

03.4521.11A - 359lm White / Matt Gold
03.4521.ASA - 359lm Brushed Aluminium / Matt Gold
03.4521.ANA - 359lm Black / Matt Gold
03.4521.B3A - 359lm Brown / Matt Gold



CERTIFICATIONS











Flos.architectural@flos.com www.flos.com



Kap Surface Ceiling Ø100. Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with led light source. non-regulable 220-240V, 50-60hz power supply integrated in luminaire body.

03.4521.11A - 359lm White / Matt Gold
03.4521.ASA - 359lm Brushed Aluminium / Matt Gold
03.4521.ANA - 359lm Black / Matt Gold
03.4521.B3A - 359lm Brown / Matt Gold



CERTIFICATIONS









| IP 20

Flos.architectural@flos.com www.flos.com