

## KAP SURFACE CEILING Ø100

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling surface
<b>Lamps description</b>	Power LED 9W 850 lm 3000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor

### OPTICAL


<b>Reflector finish</b>	Black
<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	33°

### ELECTRICAL

<b>Number of ballast</b>	1
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

### PHYSICAL


<b>Diameter (mm)</b>	100
<b>Height (mm)</b>	235
<b>Construction material</b>	Extruded aluminum
<b>Weight (kg)</b>	0,85

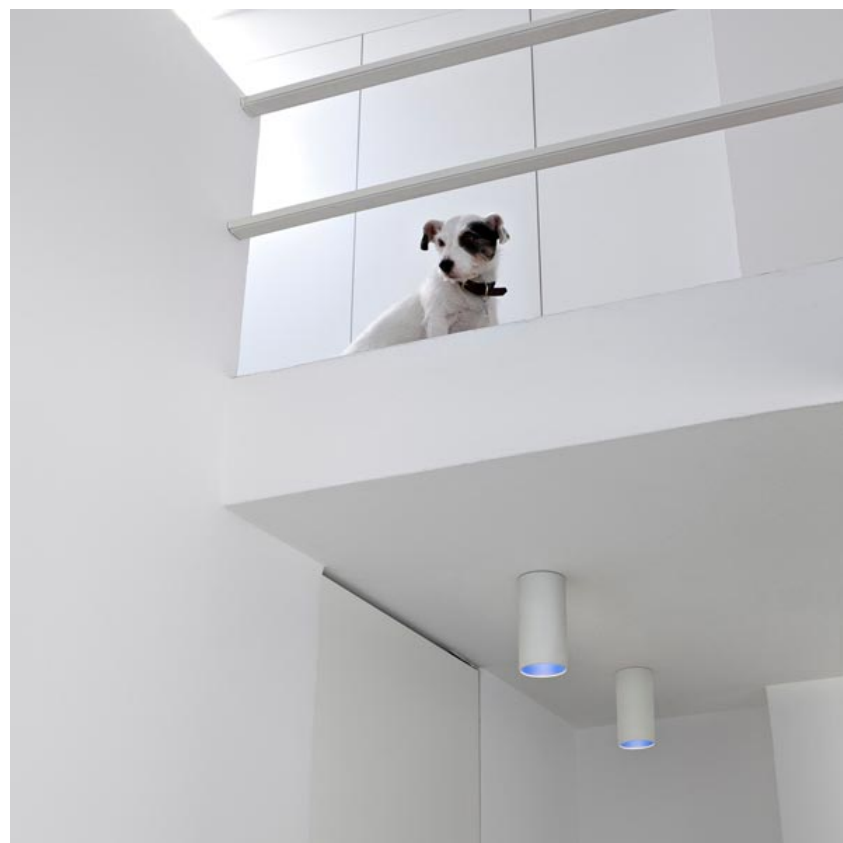

### Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with led light source. non-regulable 220-240V, 50-60hz power supply integrated in luminaire body.

03.4523.11A - 281lm	White / Black
03.4523.ASA - 281lm	Brushed aluminium / Black
03.4523.ANA - 281lm	Black / Black
03.4523.B3A - 281lm	Brown / Black



### CERTIFICATIONS



## Kap Surface Ceiling Ø100 . Lamps



### Power LED

**Lamp category:**  
LED

**Socket:**  
Special base


**Lamp type:**  
Power LED



### Kap Surface Ceiling Ø100 designed by FLOS Architectural

Luminaire for mounting in ceiling with led light source. non-regulable  
220-240V, 50-60hz power supply  
integrated in luminaire body.

03.4523.IIA - 281lm	White / Black
03.4523.ASA - 281lm	Brushed aluminium / Black
03.4523.ANA - 281lm	Black / Black
03.4523.B3A - 281lm	Brown / Black



### CERTIFICATIONS

