

## KAP Ø105 I-10V

|                                |                                                                                    |
|--------------------------------|------------------------------------------------------------------------------------|
| <b>Number of heads</b>         | 1                                                                                  |
| <b>Mounting</b>                | Ceiling recessed                                                                   |
| <b>Lamps description</b>       | LED Array 13,5W 1650 lm 3000K CRI 90                                               |
| <b>Luminaire luminous flux</b> | Extreme Cut-off. See reference number                                              |
| <b>Environment</b>             | Indoor                                                                             |
| <b>Notes</b>                   | Conventional pre-installation frame and/or Fast&Perfect. To be ordered separately. |

## OPTICAL

|                                     |           |
|-------------------------------------|-----------|
| <b>Light controller description</b> | Reflector |
| <b>Aiming</b>                       | Fixed     |
| <b>Light distribution symmetry</b>  | Symmetric |
| <b>Beam angle</b>                   | 36°       |

## ELECTRICAL

|                                 |                           |
|---------------------------------|---------------------------|
| <b>Transformer availability</b> | Included                  |
| <b>Transformer mounting</b>     | Remote                    |
| <b>Transformer type</b>         | Electronic dimmable I-10V |
| <b>Emergency</b>                | Without                   |
| <b>Insulation class</b>         | Class II                  |

## PHYSICAL



|                              |                   |
|------------------------------|-------------------|
| <b>Cutout diameter (mm)</b>  | 130               |
| <b>Diameter (mm)</b>         | 105               |
| <b>Recessed depth (mm)</b>   | 195               |
| <b>Construction material</b> | Die-cast aluminum |
| <b>Weight (kg)</b>           | 0,83              |



**Kap Ø105 I-10V**  
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

|                       |        |
|-----------------------|--------|
| 03.4580.BI.IV - 790lm | White  |
| 03.4580.GL.IV - 783lm | Gold   |
| 03.4580.BU.IV - 501lm | Blue   |
| 03.4580.74.IV - 503lm | Black  |
| 03.4580.CU.IV - 695lm | Copper |

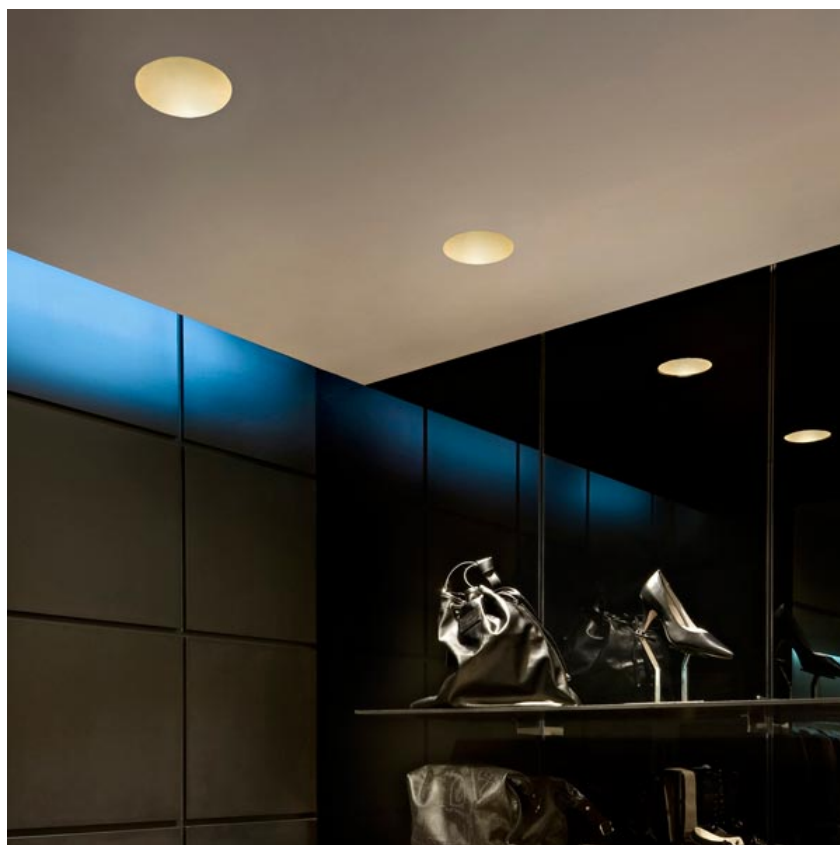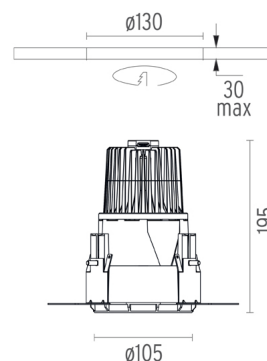


## CERTIFICATIONS



## Kap Ø105 I-10V . Accessories

### Mounting



08.8155.00


**Installation frame No Trim**

TO BE COMPLETED WITH:  
INSTALLATION FRAME.  
AVAILABLE AS ACCESSORY ELEMENT.  
MUST BE ORDERED SEPARATELY.

Ø105  
□ 08.8155.00



Example  
03.4400.B1 + 08.8155.00



### HOW TO ORDER



08.8420.00

**Installation can for concrete KAP ø105**



**Kap Ø105 I-10V**  
designed by FLOS Architectural


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4580.B1.IV - 790lm White
- 03.4580.GL.IV - 783lm Gold
- 03.4580.BU.IV - 501lm Blue
- 03.4580.74.IV - 503lm Black
- 03.4580.CU.IV - 695lm Copper




08.9101.00

**Fast&Perfect tool ø153**



08.9104.00

**Installation frame No Trim**

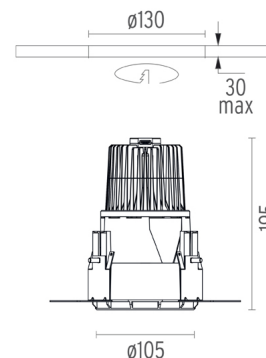

### CERTIFICATIONS



## Kap Ø105 I-10V . Lamps



### LED Array

**Lamp category:**  
LED

**Socket:**  
Special base

**Lamp type:**  
LED Array




### Kap Ø105 I-10V

designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

|                       |        |
|-----------------------|--------|
| 03.4580.BI.IV - 790lm | White  |
| 03.4580.GL.IV - 783lm | Gold   |
| 03.4580.BU.IV - 501lm | Blue   |
| 03.4580.74.IV - 503lm | Black  |
| 03.4580.CU.IV - 695lm | Copper |

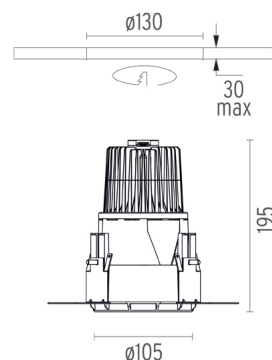

### CERTIFICATIONS

