

KAP Ø105 DALI

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array 13,5W 1650 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Conventional pre-installation frame and/or Fast&Perfect. To be ordered separately.

OPTICAL

Light controller description	Reflector
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	36°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	130
Diameter (mm)	105
Recessed depth (mm)	195
Construction material	Die-cast aluminum
Weight (kg)	0,83



Kap Ø105 Dali
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

●	03.4580.BI.DA - 790lm	White
●	03.4580.GL.DA - 783lm	Gold
●	03.4580.BU.DA - 501lm	Blue
●	03.4580.74.DA - 503lm	Black
●	03.4580.CU.DA - 695lm	Copper

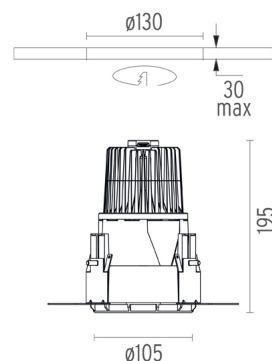


CERTIFICATIONS



Kap Ø105 Dali . Accessories

Mounting



08.8155.00


Installation frame No Trim

TO BE COMPLETED WITH:
INSTALLATION FRAME.
AVAILABLE AS ACCESSORY ELEMENT.
MUST BE ORDERED SEPARATELY.

Ø105
□ 08.8155.00



Example
03.4400.B1 + 08.8155.00



HOW TO ORDER



08.8420.00

Installation can for concrete KAP Ø105



Kap Ø105 Dali
designed by FLOS Architectural


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4580.B1.DA - 790lm White
- 03.4580.GL.DA - 783lm Gold
- 03.4580.BU.DA - 501lm Blue
- 03.4580.74.DA - 503lm Black
- 03.4580.CU.DA - 695lm Copper





08.9101.00

Fast&Perfect tool Ø153



08.9104.00

Installation frame No Trim



CERTIFICATIONS



Kap Ø105 Dali . Lamps



LED Array

Lamp category:
LED

Socket:
Special base


Lamp type:
LED Array



Kap Ø105 Dali designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

03.4580.BI.DA - 790lm	White
03.4580.GL.DA - 783lm	Gold
03.4580.BU.DA - 501lm	Blue
03.4580.74.DA - 503lm	Black
03.4580.CU.DA - 695lm	Copper

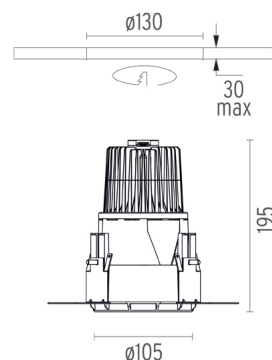

CERTIFICATIONS

