

KAP Ø105 DALI

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array 13,5W 1600 lm 2700K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Conventional pre-installation frame and/or Fast&Perfect. To be ordered separately.

OPTICAL

Light controller description	Reflector
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	36°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL



Cutout diameter (mm)	130
Diameter (mm)	105
Recessed depth (mm)	195
Construction material	Die-cast aluminum
Weight (kg)	0,83



Kap Ø105 Dali
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

●	03.4581.BI.DA - 753lm	White
●	03.4581.GL.DA - 746lm	Gold
●	03.4581.BU.DA - 477lm	Blue
●	03.4581.74.DA - 479lm	Black
●	03.4581.CU.DA - 662lm	Copper

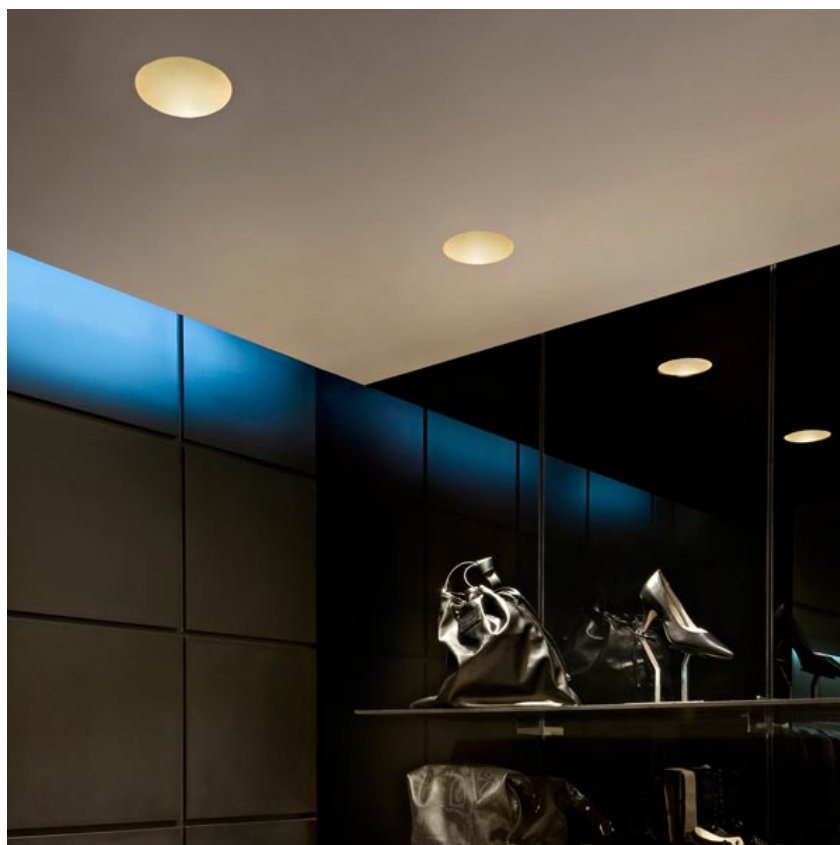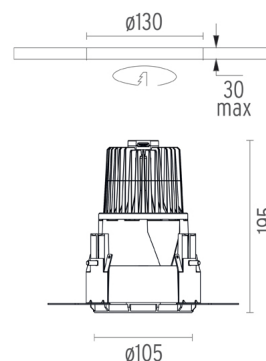


CERTIFICATIONS



Kap Ø105 Dali . Accessories

Mounting



08.8155.00


Installation frame No Trim

TO BE COMPLETED WITH:
INSTALLATION FRAME.
AVAILABLE AS ACCESSORY ELEMENT.
MUST BE ORDERED SEPARATELY.

Ø105
□ 08.8155.00



Example
03.4400.B1 + 08.8155.00



HOW TO ORDER



08.8420.00

Installation can for concrete KAP Ø105



Kap Ø105 Dali
designed by FLOS Architectural


Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4581.B1.DA - 753lm White
- 03.4581.GL.DA - 746lm Gold
- 03.4581.BU.DA - 477lm Blue
- 03.4581.74.DA - 479lm Black
- 03.4581.CU.DA - 662lm Copper




08.9101.00

Fast&Perfect tool Ø153



08.9104.00

Installation frame No Trim

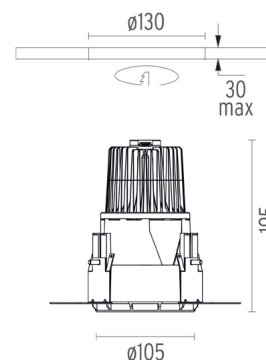

CERTIFICATIONS



Kap Ø105 Dali . Lamps



LED Array

Lamp category:
LED

Socket:
Special base

Lamp type:
LED Array




Kap Ø105 Dali

designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

03.4581.BI.DA - 753lm	White
03.4581.GL.DA - 746lm	Gold
03.4581.BU.DA - 477lm	Blue
03.4581.74.DA - 479lm	Black
03.4581.CU.DA - 662lm	Copper

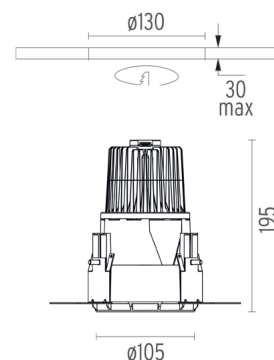

CERTIFICATIONS

