

KAP 105 SQUARE I-10V

Number of heads	1
Mounting	Ceiling recessed
Lamps description	LED Array 17W 2000 lm 3000K CRI 90
Luminaire luminous flux	Extreme Cut-off. See reference number
Environment	Indoor
Notes	Pre-installation frame. To be ordered separately.

OPTICAL

Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	40°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable I-10V
Emergency	Without
Insulation class	Class II

PHYSICAL



Cutout length (mm)	120
Cutout width (mm)	120
Recessed depth (mm)	195
Construction material	Die-cast aluminum
Weight (kg)	0,84




Kap 105 Square I-10V
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

●	03.4582.BI.IV - 992lm	White
●	03.4582.GL.IV - 965lm	Gold
●	03.4582.BU.IV - 742lm	Blue
●	03.4582.74.IV - 736lm	Black
●	03.4582.CU.IV - 924lm	Copper

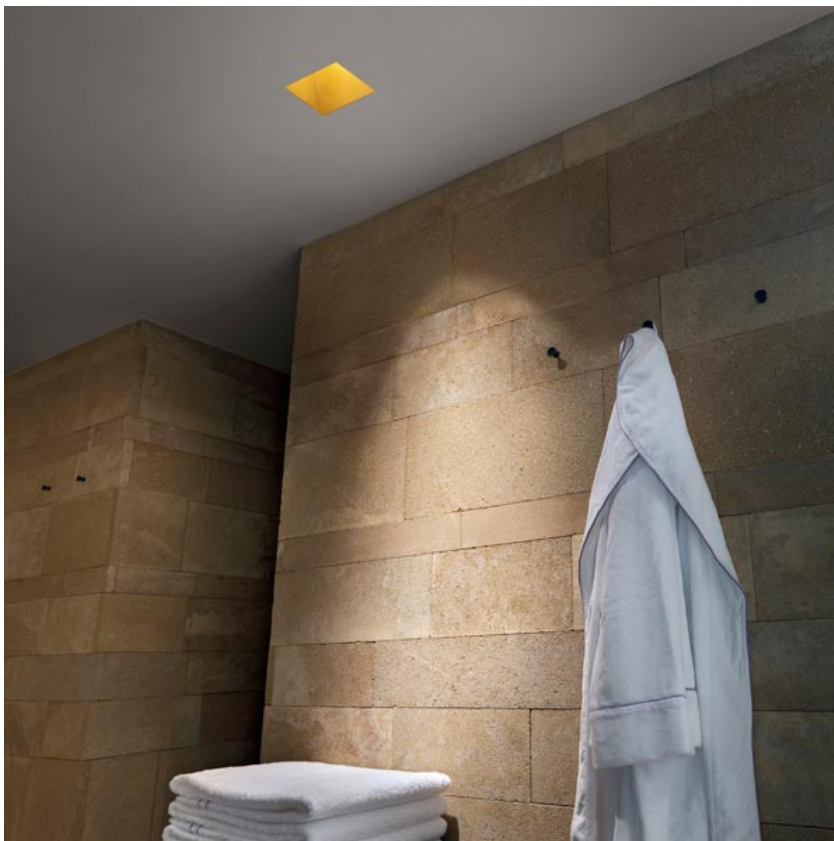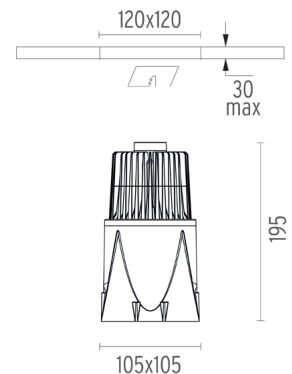


CERTIFICATIONS

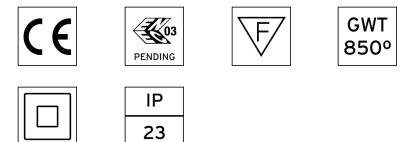

Kap I05 Square I-10V . Accessories

Mounting



○ 08.8479.00

Installation frame No Trim



Kap I05 Square I-10V
designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

- 03.4582.BI.IV - 992lm White
- 03.4582.GL.IV - 965lm Gold
- 03.4582.BU.IV - 742lm Blue
- 03.4582.74.IV - 736lm Black
- 03.4582.CU.IV - 924lm Copper

Kap I05 Square I-10V . Lamps



LED Array

Lamp category:


LED

Socket:

Special base

Lamp type:

LED Array

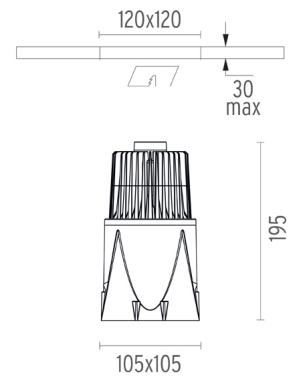

CERTIFICATIONS

