FLOS

KAP 105 SQUARE

Number of heads Mounting Lamps description Luminaire luminous flux Environment Notes L

Indoor

Fixed

40°

Symmetric

Included

Remote

Electronic

Without

Class II

Ceiling recessed

LED Array 17W 1800 lm 2700K CRI 90

Extreme Cut-off. See reference number

Pre-installation frame. To be ordered separately.

OPTICAL


Aiming Light distribution symmetry Beam angle

ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Cutout length (mm)	120
Cutout width (mm)	120
Recessed depth (mm)	195
Construction material	Die-cast aluminum
Weight (kg)	0,84

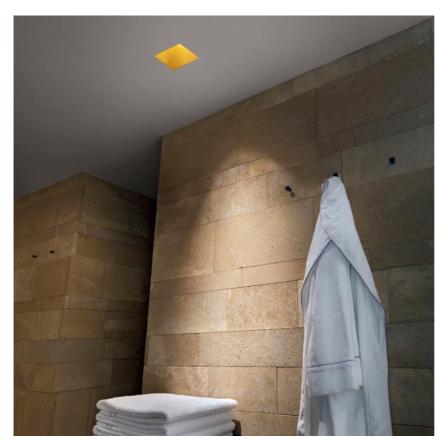




Kap 105 Square designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

03.4583.B1 - 946lm	White
03.4583.GL - 9211m	Gold
03.4583.BU - 708lm	Blue
03.4583.74 - 703 lm	Black
🥔 03.4583.CU - 882lm	Copper



CERTIFICATIONS



PENDING

23



\F

Flos.architectural(Oflos com

FLOS

Kap 105 Square . Accessories

Mounting



08.8479.00

Installation frame No Trim

Kap 105 Square . Lamps



LED Array Lamp category: LED Socket: Special base Lamp type: LED Array



Kap 105 Square designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.



