

KAP Ø145 DEEP DALI

Number of heads

Mounting Ceiling recessed

Lamps descriptionLED Array 17W 1800 lm 2700K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Environment Indoor

Notes Pre-installation frame. To be ordered separately.

OPTICAL

Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 34°

ELECTRICAL

Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

PHYSICAL


Cutout diameter (mm) 165

Diameter (mm) 145

Recessed depth (mm) 230

Construction material Die-cast aluminum

Weight (kg) 0,99

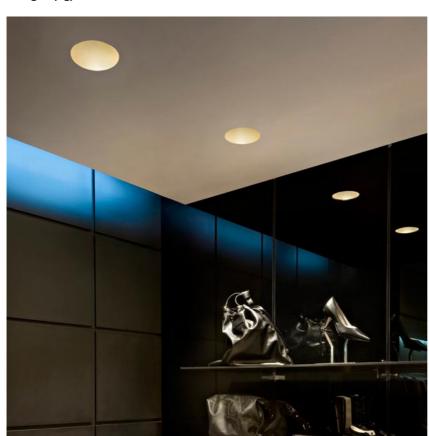



Kap Ø145 Deep Dali designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.


03.4587.B1.DA - 936lm White

03.4587.GL.DA - 923lm Gold

03.4587.BU.DA - 573lm Blue

03.4587.74.DA - 615lm Black

03.4587.CU.DA - 842lm Copper



CERTIFICATIONS











Flos.architectural@flos.com www.flos.com



Kap Ø145 Deep Dali . Accessories

Mounting



08.8156.00

Trim

Installation Frame No









Installation can for concrete KAP ø145 08.8491.30

08.8491.GL 08.8491.BU

08.8491.14

Installation Frame Trim


Installation frame Kap Ø145/ Kap ø I 45 wall washer. Copper finish trim frame not available. Combine with withe or any of the other finishes according to the desired final aesthetic effect.



Kap Ø145 Deep Dali designed by FLOS Architectural

Recessed luminaire with LED light source. Remote electronic transformer 220/240V included.

03.4587.B1.DA - 936lm White 03.4587.GL.DA - 923lm Gold 03.4587.BU.DA - 573lm Blue 03.4587.74.DA - 615lm Black 03.4587.CU.DA - 842lm Copper



Kap Ø145 Deep Dali . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array

CERTIFICATIONS













Flos.architectural@flos.com www.flos.com