## FLOS

## LIGHT SNIPER ADJUSTABLE SQUARE 1-10V

L

Bare lamps

Adjustable

Symmetric

24°

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Ceiling recessed Phosphor LED 9W 800 Im 3000K CRI 98 Extreme Cut-off. See reference number 220/240 Indoor

## OPTICAL

Light controller description Aiming Light distribution symmetry Beam angle


#### ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class Included Remote Electronic dimmable I-IOV Without Class II

#### PHYSICAL

Cutout diameter (mm)	90
Length (mm)	100
Width (mm)	100
Recessed depth (mm)	125
Construction material	Alun
Weight (kg)	0,51



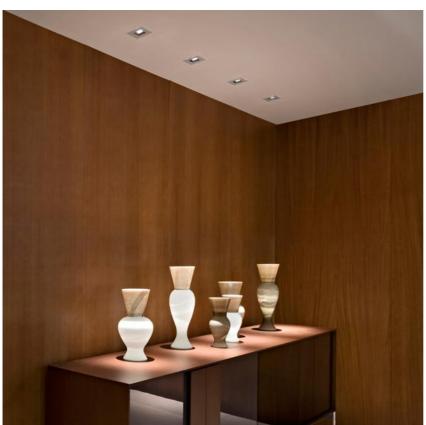





designed by FLOS Architectural


High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





ø100





-los.architectural@flos.com

# FLO

## Light Sniper Adjustable Square I-I0V . Accessories

#### Mounting



08.8240.00B

Flush ceilling square

frame accessory



08.8243.00

08.8243.00.5U


08.8243.00.IU

Ceiling protector accessory.



08.8250.00

**Concrete instalation** can.







Light Sniper Adjustable Square 1-10V designed by FLOS Architectural


High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





#### CERTIFICATIONS







08.8222.30A

**Ceiling protector** accessory. Square

## FLOS

### Light Sniper Adjustable Square I-10V . Lamps




Phosphor LED Lamp category: LED Lamp type: Phosphor LED



Light Sniper Adjustable Square I-10V designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





#### CERTIFICATIONS

