

### LIGHT SNIPER FIXED ROUND DALI VERSION

Number of heads

**Mounting** Ceiling recessed

Lamps descriptionPower LED 11W 1060 lm 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

### **OPTICAL**

Light controller descriptionBare lampsAimingFixedLight distribution symmetrySymmetricBeam angle15° Spot

### **ELECTRICAL**


Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

### **PHYSICAL**

Cutout diameter (mm)90Diameter (mm)100Recessed depth (mm)165Construction materialAluminiumWeight (kg)0,49

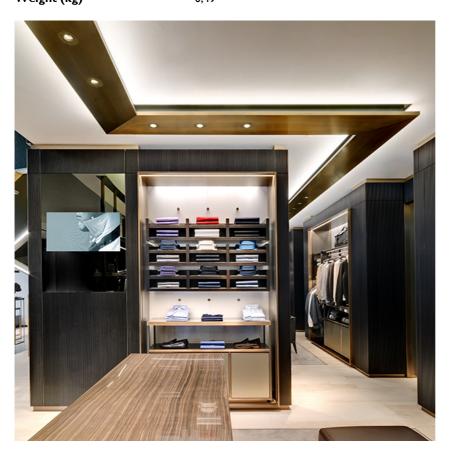




**Light Sniper Fixed Round Dali Version** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.







### **CERTIFICATIONS**











Flos.architectural@flos.com www.flos.com



# Light Sniper Fixed Round Dali Version . Accessories

### **Optical**





08.8041.68

# Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.

08.8412.14

### Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



**Light Sniper Fixed Round Dali Version** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.



## **M**ounting





990 ↓ 30 max



08.8239.00B

Flush ceilling round frame accessory

08.8243.00

08.8243.00.5U

08.8243.00.1U

Ceiling protector accessory.

08.8250.00

Concrete instalation can.

## CERTIFICATIONS









□ IP 44

Flos.architectural@flos.com www.flos.com



# Light Sniper Fixed Round Dali Version . Accessories



08.8229.30A

Ceiling protector accessory. Round

## **Light Sniper Fixed Round Dali Version . Lamps**



**Power LED** 

Lamp category:

LED

Socket:

Special base


**Lamp type:** Power LED

Light Spiner Fixed Round Dali Version

**Light Sniper Fixed Round Dali Version** designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.4980.06.ADA - 455lm Chrome
03.4980.GL.ADA - 455lm Gold
03.4980.14.ADA - 455lm Matt black





## **CERTIFICATIONS**













Flos.architectural@flos.com www.flos.com