## FLOS

### LIGHT SNIPER ADJUSTABLE ROUND

L

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Ceiling recessed Power LED 11W 910 Im 2700K CRI 90 Extreme Cut-off. See reference number 220/240 Indoor

### OPTICAL

Light controller descriptionBare lampsAimingAdjustableLight distribution symmetrySymmetricBeam angle15° Spot

### ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

### PHYSICAL

Cutout diameter (mm)	90
Diameter (mm)	10
Recessed depth (mm)	15
Construction material	Α
Weight (kg)	0,




Included

Remote

Electronic

Without


Class II

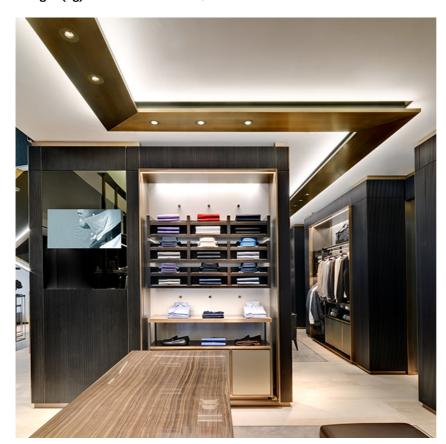




### Light Sniper Adjustable Round designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





### CERTIFICATIONS

CE	<b>K</b> 03	F	GWT 850°
$\frown$			IP
40°	360°		44

# (

### Light Sniper Adjustable Round . Accessories

#### Optical





08.8041.68

**Elliptical light** distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.



Honeycomb


"Honeycomb" anti-glare grid made of aluminium cells.



Light Sniper Adjustable Round designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





Mounting



08.8239.00B

Flush ceilling round

frame accessory

08.8243.00 08.8243.00.5U

08.8243.00.1U

Ceiling protector accessory.




08.8250.00

**Concrete instalation** can.

CERTIFICATIONS CE ۱F **K**03

<u>/</u> 40°



GWT

## FLOS

### Light Sniper Adjustable Round . Accessories



08.8229.30A

Ceiling protector accessory. Round





Power LED LED Socket: Special base Lamp type: Power LED



### Light Sniper Adjustable Round designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

