FLOS

LIGHT SNIPER ADJUSTABLE ROUND

L

Bare lamps

Adjustable

Symmetric

Included

Remote

Electronic

Without

Class II

25° Medium

Number of heads Mounting Lamps description Luminaire luminous flux Voltage (V) Environment

Ceiling recessed Power LED 11W 1060 Im 3000K CRI 90 Extreme Cut-off. See reference number 220/240 Indoor

OPTICAL

Light controller description Aiming Light distribution symmetry Beam angle


ELECTRICAL

Transformer availability Transformer mounting Transformer type Emergency Insulation class

PHYSICAL

Cutout diameter (mm)	9
Diameter (mm)	1
Recessed depth (mm)	I.
Construction material	Α
Weight (kg)	0



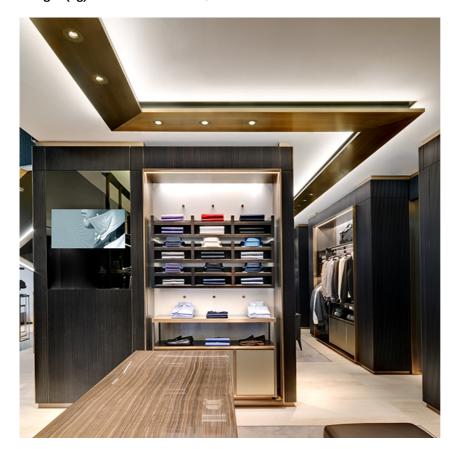




Light Sniper Adjustable Round designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





	/ 3 800	\vee	850°
			IP
40°	360°		44

GWT

(

Light Sniper Adjustable Round . Accessories

Optical





08.8041.68

Mounting

Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.




Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



Light Sniper Adjustable Round designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.



Ø90 30 max 106 Ø100

08.8239.00B

Flush ceilling round frame accessory

08.8243.00

08.8243.00.5U 08.8243.00.1U


Ceiling protector accessory.



08.8250.00

Concrete instalation can.

CERTIFICATIONS



Flos.architectural@flos.com

FLOS

Light Sniper Adjustable Round . Accessories



08.8229.30A

Ceiling protector accessory. Round







Power LED LED Socket: Special base Lamp type: Power LED



Light Sniper Adjustable Round designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





CERTIFICATIONS

