

## LIGHT SNIPER ADJUSTABLE SQUARE DALI VERSION

Number of heads

**Mounting** Ceiling recessed

Lamps descriptionPower LED 11W 1060 lm 3000K CRI 90Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240 Environment Indoor

## **OPTICAL**

Light controller descriptionBare lampsAimingAdjustableLight distribution symmetrySymmetricBeam angle25° Medium

#### **ELECTRICAL**


Transformer availability Included
Transformer mounting Remote

Transformer type Electronic dimmable dali

Emergency Without Insulation class Class II

#### **PHYSICAL**

Cutout diameter (mm)90Recessed depth (mm)155Construction materialAluminiumWeight (kg)0,65

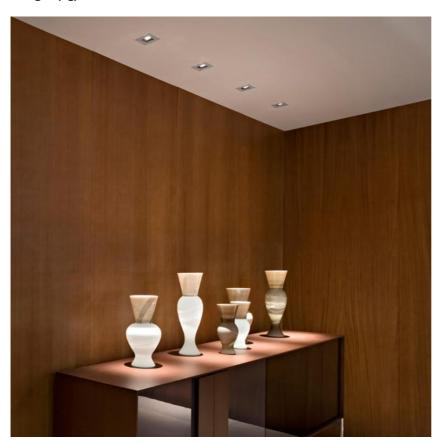




Light Sniper Adjustable Square Dali Version

designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.





#### **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com



## Light Sniper Adjustable Square Dali Version . Accessories

## **Optical**





08.8041.68

#### Elliptical light distribution lens

Elliptical light distribution lens in 4mm thick tempered glass.

08.8412.14

## Honeycomb

"Honeycomb" anti-glare grid made of aluminium cells.



# Light Sniper Adjustable Square Dali Version

designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.



## **M**ounting







Flush ceilling square frame accessory

08.8240.00B

08.8243.00


08.8243.00.5U

08.8243.00.1U

Ceiling protector accessory.

08.8250.00

**Concrete instalation** can.



# **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com



## Light Sniper Adjustable Square Dali Version . Accessories



08.8222.30A

Ceiling protector accessory. Square

# Light Sniper Adjustable Square Dali Version . Lamps



**Power LED** 

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Light Sniper Adjustable Square Dali Version

designed by FLOS Architectural

High-performance embedded light fixture for LED light source. Remote 220-240V power supply included.

03.4998.06.ADA - 667lm Chrome
03.4998.GL.ADA - 667lm Gold
03.4998.14.ADA - 667lm Matt black



#### **CERTIFICATIONS**

















Flos.architectural@flos.com www.flos.com