

KAP SURFACE WALL Ø100

Number of heads

Mounting Wall surface

Lamps descriptionPower LED 9W 850 Im 3000K CRI 80Luminaire luminous fluxExtreme Cut-off. See reference number

Voltage (V) 220/240
Environment Indoor



Reflector finish White
Aiming Fixed
Light distribution symmetry Symmetric
Beam angle 33°

ELECTRICAL


Transformer availability Included
Transformer mounting Integral
Transformer type Electronic
Emergency Without
Insulation class Class I

PHYSICAL

Diameter (mm) 100 Height (mm) 236

Construction material Extruded aluminum

Weight (kg) 0,90

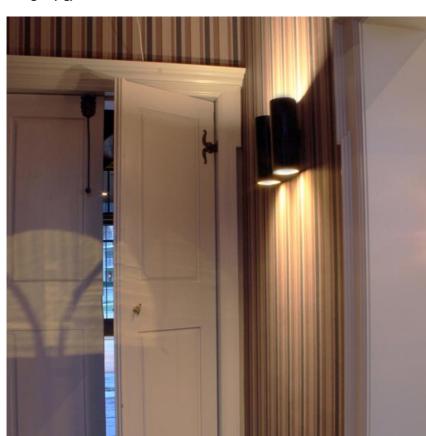



Kap Surface Wall Ø100 designed by FLOS Architectural


Luminaire for wall mounting with led light source. nonregulable 220-240V, 50-60hz power supply integrated in luminaire body.

03.5730.11A - 378lm White / White

03.5730.ASA - 378lm Brushed Aluminium / White

03.5730.ANA - 378lm Black / White

03.5730.B3A - 378lm Brown / White



CERTIFICATIONS











Flos.architectural@flos.com www.flos.com



Kap Surface Wall Ø100 . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Kap Surface Wall Ø100 designed by FLOS Architectural

Luminaire for wall mounting with led light source. nonregulable 220-240V, 50-60hz power supply integrated in luminaire body.

03.5730.11A - 378lm


White / White

03.5730.ASA - 378lm

Brushed Aluminium / White

03.5730.ANA - 378lm Black / White 03.5730.B3A - 378lm

Brown / White



CERTIFICATIONS











ΙP 20

Flos.architectural@flos.com www.flos.com